

# Technical data sheet

## PYROLINE® Con D BSK I90/E30 fire protection duct



Item number: 7215162



Fire protection duct made from water and frost-proof fibreglass lightweight concrete of building material class A1 according to EN 13501-1 for fireproof laying of cables in rescue and emergency routes, and for the maintenance of electrical functionality of safety-relevant systems. Classification I90 as I duct according to DIN 4102 Part 11 and classification E30 as E duct according to DIN 4102 Part 12.

Mounting of the duct directly on walls or under ceilings.

Including countersunk head screws and sealing strip.  
Including countersunk head screws and sealing strip.




Fibreglass lightweight concrete

### Master data

Item number	7215162
Type	BSK 091016
Description 1	Fire protection duct I90/E30
Manufacturer	OBO
Dimension	105x160
Colour	Grey
Material	Fibreglass lightweight concrete
Smallest sales unit	1
Unit of quantity	Metre
Weight	1430 kg
Weight unit	kg/100 m

### Dimensions

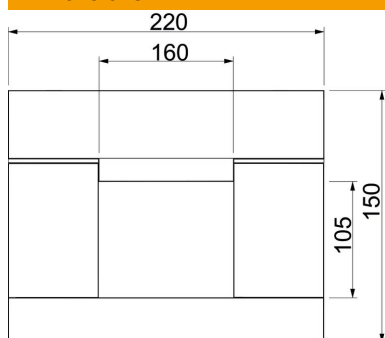

Length	1,000 mm
Dimension B	220 mm
Dimension b	160 mm
Dimension h	105 mm
Dimension H	150 mm

# Technical data sheet

## PYROLINE® Con D BSK I90/E30 fire protection duct

Item number: 7215162



### Technical data

Number of flammable sides	3
Cover fastening	Screw
Fire resistance class E – function maintenance	30
Fire resistance class I – installation duct	90
With perforation	no
Partitions possible	yes
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete