

Technical data sheet

Bolt tie BZ s

Item number: 3498410



Bolt tie BZ with reduced anchoring depth for the anchoring of medium-duty to heavy-duty loads, both in cracked and non-cracked concrete. It combines high approved loads with small edge distances and axial spacings. European Technical Approval ETA-99/0010, including characteristic values under fire exposure to fire resistance R 120.

Proof of suitability in the case of seismic impacts, categories C1 and C2.

Shock approval by the Federal Office for Civil Protection in Bern, Switzerland.



St Steel

G Electrogalvanized

Master data

Item number	3498410
Description 1	Wedge anchor BZ
Description 2	reduced anchoring depth
Manufacturer	OBO
Dimension	M8x65mm
Material	Steel
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	100
Unit of quantity	Piece
Weight	2.6 kg
Weight unit	kg/100 pc.


Technical data sheet

Bolt tie BZ s

Item number: 3498410



Dimensions

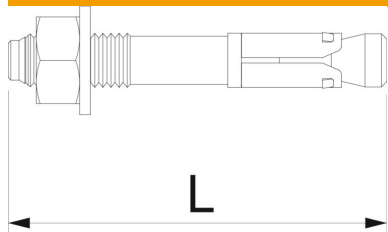

Length	65 mm
Dimension L	65 mm

Technical data

Version for	For knocking in
Anchor/nail/bolt version	Spreading anchor
Drill hole depth	49 mm
Drill hole diameter, min.	8 mm
Thread	M8
Thread metric	8
Thread type	Metric
Clamping strength	11 mm
Permitted load range, tension zone	2.4
Clamping range, min.	11 mm