

Technical data sheet

External corner hood, for device installation trunking Rapid 45-2 type GK-53100
Item number: 6113054



External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.



PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Master data


| | |
|---------------------|--|
| Item number | 6113054 |
| Type | GK-AH53100AL |
| Description 1 | External corner |
| Description 2 | variable |
| Manufacturer | OBO |
| Dimension | 110x88x88 |
| Colour | Aluminium |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 6.9 kg |
| Weight unit | kg/100 pc. |

Technical data sheet


External corner hood, for device installation trunking Rapid
45-2 type GK-53100
Item number: 6113054



Dimensions

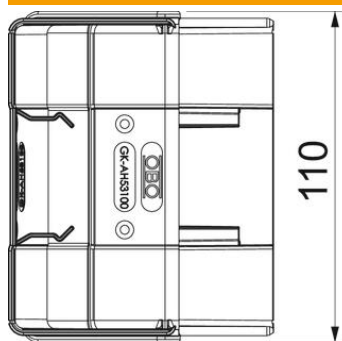

| | |
|--------|--------|
| Length | 88 mm |
| Width | 110 mm |
| Height | 55 mm |

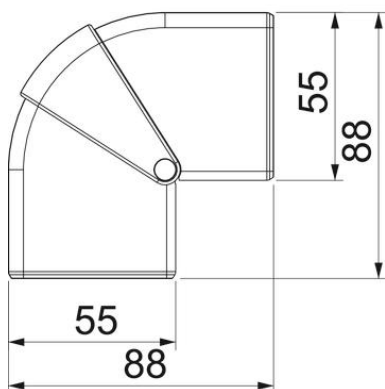

Technical data sheet

External corner hood, for device installation trunking Rapid
45-2 type GK-53100
Item number: 6113054



Technical data

| | |
|--------------------------------------|--------------|
| Number of covers | 1 |
| Version for | Hood fitting |
| for duct width | 100 mm |
| for trunking height | 53 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Cross-over |
| Mounting perforation in base | no |
| Cover width | 0 mm |
| Cover width 2 | 0 mm |
| Cover width 3 | 0 mm |
| Protection rating | IP40 |
| Protective film | no |
| Protection rating IK code | IK08 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 110 mm |
| Angle range, min. | 80 mm |