

# Technical data sheet

## LLIS 640 cable ladder, 3 m FT

Item number: 6209574



Cable ladder with 60 mm side height with welded C profile rungs which are open in an upwards direction. Rolled side rail for reinforcement and as edge protection. Fastening to the bracket is done using hold-down clamps, type LKS 40. The slot dimension of the rung is 17 mm and the appropriate clamp clip is type 2056U.  
Magnetic shield insulation without cover 10 dB, with cover 15 dB.



St

Steel

FT

Hot-dip galvanised

### Master data

Item number	6209574
Type	LLIS 640 3 FT
Description 1	Cable ladder
Description 2	perforated rung, welded
Manufacturer	OBO
Dimension	60x400x3000
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	256.267 kg
Weight unit	kg/100 m


# Technical data sheet

LLIS 640 cable ladder, 3 m FT

Item number: 6209574



## Dimensions

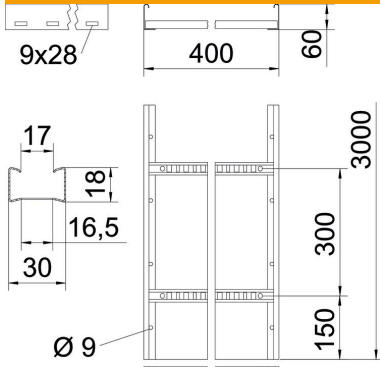

Length	3,000 mm
Length	3,000 ft
Width	400 mm
Height	60 mm

## Technical data

Version of the rungs	Profile perforated
Side rail version	Flat profile
Fastening of rung	Welded
Maintain electrical functions	no
Usable cross-section	160 cm <sup>2</sup>
Usable cross-section	16000 mm <sup>2</sup>
Rustproof steel, pickled	no
Side perforation	yes
Rung distance	300 mm
Wide-span version	no
Rail thickness	1.25 mm

## Loads

Support spacing 1.0 m	2 kN/m
Support spacing 2.0 m	1.8 kN/m
Support spacing 3.0 m	0.8 kN/m