

# Technical data sheet

MS4022 mounting rail, heavy duty, slot 18 mm, FT, perforated

Item number: 1121898



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



**St** Steel

**FT** Hot-dip galvanised

## Master data

|                     |                       |
|---------------------|-----------------------|
| Item number         | 1121898               |
| Type                | MS4022P6000FT         |
| Description 1       | Profile rail          |
| Description 2       | perforated, slot 18mm |
| Manufacturer        | OBO                   |
| Dimension           | 6000x40x22,5          |
| Material            | Steel                 |
| Surface             | Hot-dip galvanised    |
| Surface standard    | DIN EN ISO 1461       |
| Smallest sales unit | 6                     |
| Unit of quantity    | Metre                 |
| Weight              | 152.5 kg              |
| Weight unit         | kg/100 m              |


# Technical data sheet

MS4022 mounting rail, heavy duty, slot 18 mm, FT, perforated

Item number: 1121898



## Dimensions

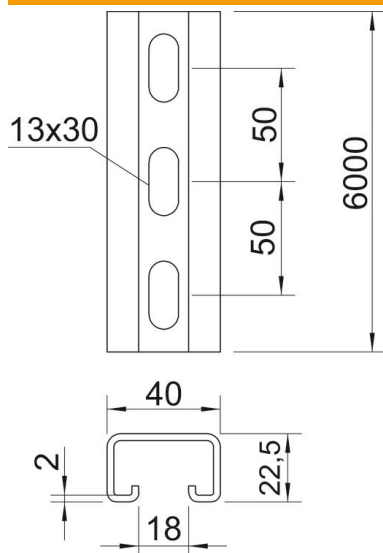

|             |          |
|-------------|----------|
| Length      | 6,000 mm |
| Width       | 40 mm    |
| Height      | 22.5 mm  |
| Dimension L | 6,000 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | Perforated back      |
| Version for                   | Single profile       |
| Drill hole spacing, centre    | 50 mm                |
| Maintain electrical functions | no                   |
| Material thickness            | 2 mm                 |
| With perforation              | no                   |
| With tothing                  | no                   |
| Profile shape                 | C profile            |
| Slot width                    | 18 mm                |
| Static value A                | 1.74 cm <sup>2</sup> |
| Static value Iy               | 1.18 cm              |
| Static value Iz               | 4.45 cm              |
| Static value Wy               | 1.05 cm <sup>2</sup> |
| Static value Wz               | 2.23 cm <sup>2</sup> |