

PYROWRAP®

FSB-WLS and FSB-WB cable bandages

To prevent the spread of fire



PYROWRAP® FSB-WLS



- Flexible fire protection casing
- Suitable for indoor use
- Simple application



PYROWRAP® FSB-WB

- Weatherproof, flexible fire protection casing
- Suitable for outdoor use
- Resistant against certain oils, alkaline solutions and acids

With the PYROWRAP® cable bandages, large cable bundles or cable support systems can be encased in order to prevent the spread of fire. The PYROWRAP® Wet FSB-WLS cable bandages are certified for use in wet rooms and, where required, for escape and emergency routes on the inside of buildings. The PYROWRAP® Wet FSB-WB cable bandages can be used in environments with special conditions, such as industrial areas and outdoors. When the fire protection coating turns to foam in the event of a fire, the spread of fire via the routed cables is prevented.

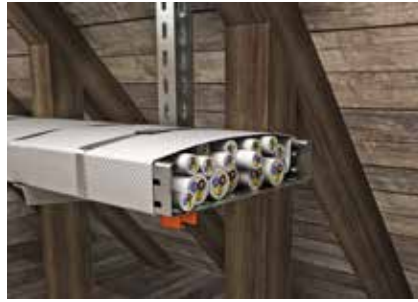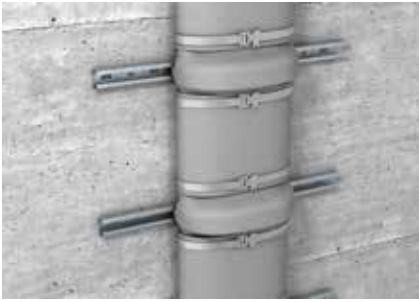

PYROWRAP® Wet FSB-WLS

Application in indoor areas and wet rooms



Type	Width mm	Length mm	Pack. pcs.	Weight kg/100 pcs.	Item no.
FSB-WLS	1100	10000	1	1.000,000	7203170

PYROWRAP® Wet FSB-WB

Application in industrial areas / outdoors



Type	Width mm	Length mm	Pack. pcs.	Weight kg/100 pcs.	Item no.
FSB-WB	1100	20000	1	2.200,000	7203160

Cable bandage for the prevention of fire expansion

	PYROWRAP® Wet FSB-WLS	PYROWRAP® Wet FSB-WB
Certification of usability	Technical approval by DIBt Berlin Building material approval by DIBt Berlin	IEC test report by the Civil Engineering Materials Testing Institute iBMB MPA Braunschweig National and European building material approval by DIBt Berlin
Documents	Z-56.217-3600 Z-19.11-2183	Z-19.11-1971 ETA-18/0430
Prevention of fire expansion	Min. 90 minutes	Min. 120 minutes
Material properties	Grey glass-fibre fabric on the outside, light-grey on the inside Building material class C-s2,d0 to EN 13501 - hardly flammable	Grey glass-fibre fabric on the outside, red on the inside Building material class EN 13501-1: B1,do,s1 - hardly flammable Weatherproof, resistant to various chemicals and oils
Maximum mounting distances	0.5 m	0.5 m
Cable types and cross-sections	No restrictions	No restrictions

Accessories



Metal strip clip, type MBS

In ladder form with single lock. For high-temperature-resistant and weatherproof fixing of the cable bandage.
Various fixed lengths.