

LFS



**Cable routing systems
Export GmbH & Co
KG**

2019/2020

Building Connections

OBO
BETTERMANN














Contact
Customer Service
+49 23 73 89 - 17 00

Service times
Monday to Friday 09.00 to 18.00

+49 23 73 89 - 12 38

info@obo.de
www.obo-bettermann.com

Planning and mounting aids

	WDK cable trunking systems, plastic	17
	WDKH cable routing trunking systems, halogen-free	65
	LKM metal cable routing trunking systems	77
	SKL skirting trunking systems	99
	VK wiring trunking systems	107
	VKH wiring trunking systems, halogen-free	135
	Rapid 45-2 plastic device installation trunking systems	143
	Rapid 45-2 aluminium device installation trunking systems	157
	Rapid 80 GK plastic device installation trunking systems	169
	Rapid 80 plastic device installation trunking systems, halogen-free	183
	Rapid 80 sheet steel device installation trunking systems	191
	Rapid 80 aluminium device installation duct systems	247
	Device installation trunking accessories	273
	ISS service pole systems	283
	Modul 45® and standard installation solutions for device installation trunking and service poles	325
	Directories	389



OBO LFS seminars: First-hand knowledge

With a comprehensive programme of training courses and seminars on the subject of cable routing systems, OBO is able to support its customers with specialist knowledge from a single source. Alongside the basic theoretical principles, the programme also deals with practical implementation in everyday applications. Special calculation and application examples round off the comprehensive programme of knowledge transfer.

Invitations to tender, product information and data sheets

We can make life easier for you, with our comprehensive selection of materials designed for practical applications, which provide you with effective support with the planning and calculation of a project. These include:

- Invitations to tender
- Product information
- Data sheets
- Data sheets

Invitations to tender for lightning protection/earthing at the highest level:

OBO manufacturers products to RAL GZ642-5 and is dedicated to compliance with the RAL directives. Lightning protection and earthing products can be used for invitations to tender according to RAL.

These documents are continually updated and can be downloaded for free at any time from the Internet download area at www.obo-bettermann.com.

Invitations to tender on the Internet at www.ausschreiben.de

More than 10,000 entries from the cable support systems, fire protection systems, connection and fastening systems, transient and lightning protection systems, cable routing systems, device systems and underfloor systems can be recalled for free. Regular updates and extensions mean that you always have a comprehensive overview of the OBO products. All the current file formats (PDF, DOC, GAEB, HTML, TEXT, XML, ÖNORM) are available.

www.ausschreiben.de

Inclusion of the cable routing systems and metal service poles in the service measures



Specifications for protective measures

If there is a fault, touchable metallic parts must not carry voltage. For this reason it is necessary to carry out appropriate safety measures. These are specified in the currently valid standards. EN 50085-1 and EN 50085-2-1 apply to the set-up of the cable routing system, whilst the erection regulations DIN VDE 0100 Parts 410 and 540 apply to the installation (protection measure against dangerous shock currents).

Different installation types in the European standard

The European standard DIN EN 50085-1 takes different installation types into account, as they are used in different countries within the EU. While only equipotential bonding testing was previously required for installation trunking systems, now the listed component standards also require protective conductor functions. This is because, in some countries, it is possible to route insulated cable in trunking.

All metallic components must be included

DIN EN 50085-1 requires that all the metallic components can be included in the protective measures. The manufacturers must carry out the appropriate tests and document them. OBO installation trunking is also tested and certified by an external testing office – that of the VDE.

Continuous protection measures


If the trunking is interrupted at a wall penetration, then continuation of the protective measures is required, as, in this case, the trunking is a foreign, conductive part,

which spreads through different areas of a building.

The connection between the covers and the device installation trunking is made using the self-contacting cover. This guarantees self-contacting and continuous protection of the trunking covers and of the device installation trunking. A continuous protection measure is made without additional wiring.

The connection between the bases is made via the joint connector. Joint connectors guarantee equipotential bonding between the bases. Important: Powder-coated metallic covers do not count as mixed construction and are thus not considered as insulating! They should thus be included in the protection measures. The sheet-steel partitions are self-contacting. The shielding measure reduces electrosmog and generally achieves improved EMC protection. Protective conductor connections should be created permanently. If there is a change to the system, e.g. for retro-installations, it is important to guarantee the maintenance of the protective functions.

Who needs to observe which standards

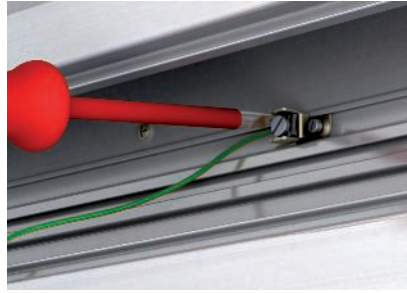


OBO as a manufacturer

Standard	Title	OBO system
DIN EN 50085-1 Device testing directive	Electrical installation trunking systems for electrical installations – Part 1: General requirements	All systems
DIN EN 50085-2-1	Special requirements for electrical installation trunking systems on walls or ceilings.	WDK, LKM, SKL, GEK-K, GEK-S, GEK-A
DIN EN 50085-2-2	Special requirements for electrical installation systems for underfloor, flushfloor or on-floor installation.	UFS
DIN EN 50085-2-3	Special requirements for wiring trunking systems for installation in switchgear cabinets.	VK
DIN EN 50085-2-4	Special requirements for freestanding installation units.	ISS

The installation engineer as systems engineer

Standard	Title	OBO system
VDE 0100 Part 410	Set-up of electrical systems with rated voltages of up to 1,000 V. Protection against electric shock.	All systems
VDE 0100 Part 520	Set-up of electrical systems with rated voltages of up to 1,000 V. Cables.	All systems
VDE 0100 Part 540	Set-up of electrical systems with rated voltages of up to 1,000 V. Equipotential bonding.	All systems
VDE 0100 Part 610	Set-up of electrical systems with rated voltages of up to 1,000 V. First testing of electrical systems before handover to the operator.	All systems
VDE 0298	Set-up of electrical systems with rated voltages of up to 1,000 V. Insulated cables in heavy current systems.	All systems
DIN EN 50310	Application of equipotential bonding and earthing in buildings with information technology equipment.	All systems

How can I work out the cable volume?

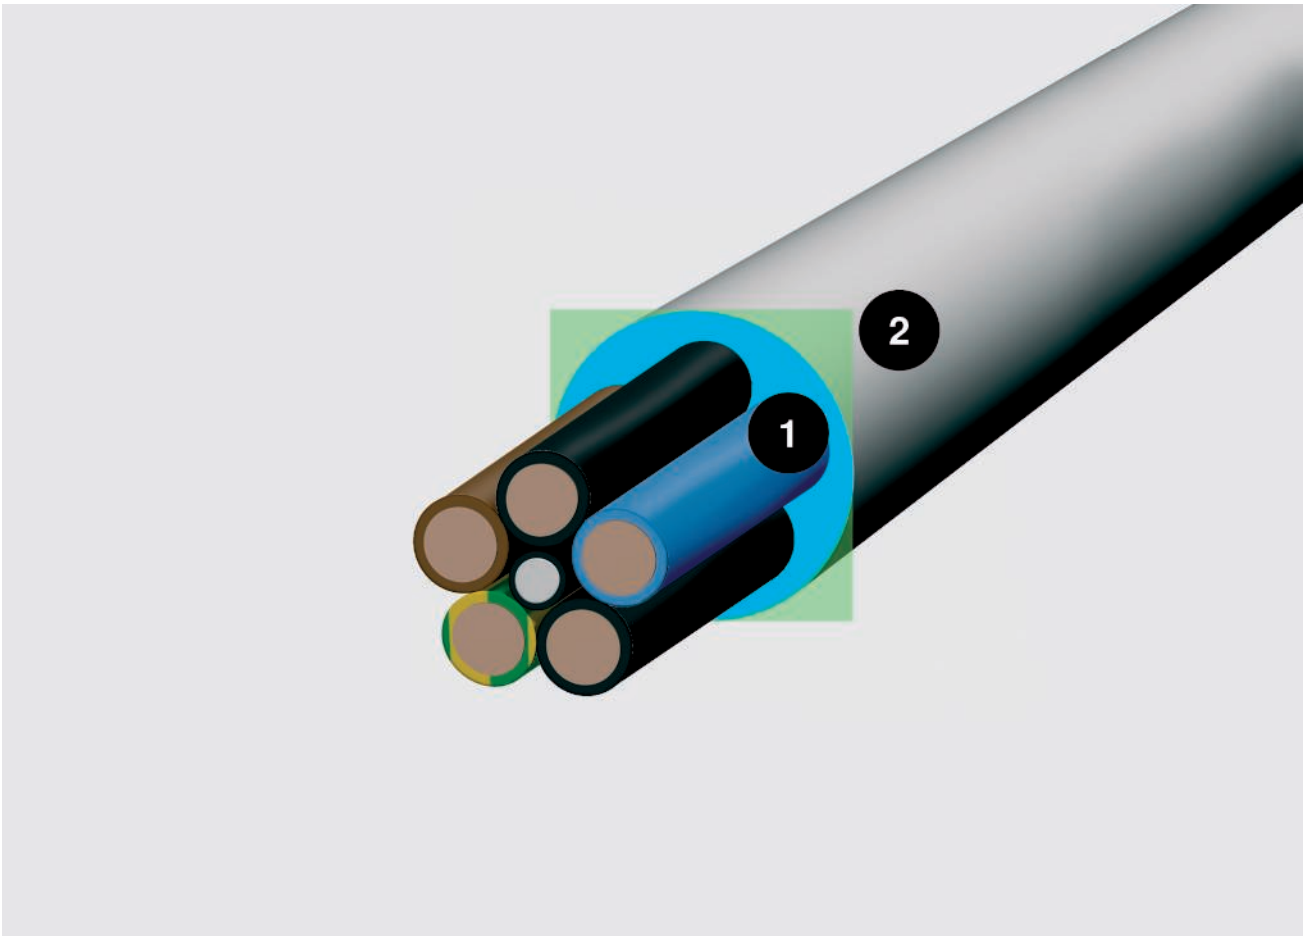

Cable diameter and space required; 1 = diameter in mm, 2 = space required in cm²

An important criterion for the selection of the right trunking size of the underfloor system is the cable volume. As the cables are never packed tightly together or are absolutely parallel, it is not enough to base the volume calculation solely on the cable diameter. A realistic calculation is provided by the formula $(2r)^2$. To simplify your work, we have listed the diameters and space requirements of the most important cable types on this double page. Important: the values are average values, which may vary between manufacturers. Please refer to the manufacturer's specifications for the exact values.



The right choice

The table on the next pages will help you to select the correct trunking size. Besides the usable cross-section of the appropriate trunking, please observe the current DIN/VDE standards for the fill factor and the approved cable heating.

Calculation with the formula $(2r)^2$

The diameter says little about the actual space required by a cable. Calculate: $(2r)^2$. This value reflects the realistic space requirements, including the compartments.

Cable volume



Insulated power cables

Type	Diameter mm	Usable cross-section cm ²
1 x 4	6.5	0.42
1 x 6	7	0.49
1 x 10	8	0.64
1 x 16	9.5	0.9
1 x 25	12.5	1.56
3 x 1.5	8.5	0.72
3 x 2.5	9.5	0.9
3 x 4	11	1.21
4 x 1.5	9	0.81
4 x 2.5	10.5	1.1
4 x 4	12.5	1.56
4 x 6	13.5	1.82
4 x 10	16.5	2.72
4 x 16	19	3.61
4 x 25	23.5	5.52
4 x 35	26	6.76
5 x 1.5	9.5	0.9
5 x 2.5	11	1.21
5 x 4	13.5	1.82
5 x 6	14.5	2.1
5 x 10	18	3.24
5 x 16	21.5	4.62
5 x 25	26	6.76
7 x 1.5	10.5	1.1
7 x 2.5	13	1.69

Insulated power cables

Type	Diameter mm	Usable cross-section cm ²
1 x 10	10.5	1.1
1 x 16	11.5	1.32
1 x 25	12.5	1.56
1 x 35	13.5	1.82
1 x 50	15.5	2.4
1 x 70	16.5	2.72
1 x 95	18.5	3.42
1 x 120	20.5	4.2
1 x 150	22.5	5.06
1 x 185	25	6.25
1 x 240	28	7.84
1 x 300	30	9
3 x 1.5	11.5	1.32
3 x 2.5	12.5	1.56
3 x 10	17.5	3.06
3 x 16	19.5	3.8
3 x 50	26	6.76
3 x 70	30	9
3 x 120	36	12.96
4 x 1.5	12.5	1.56
4 x 2.5	13.5	1.82
4 x 6	16.5	2.72
4 x 10	18.5	3.42
4 x 16	21.5	4.62
4 x 25	25.5	6.5
4 x 35	28	7.84
4 x 50	30	9
4 x 70	34	11.56
4 x 95	39	15.21
4 x 120	42	17.64
4 x 150	47	22
4 x 185	52	27
4 x 240	58	33.6
5 x 1.5	13.5	1.82
5 x 2.5	14.5	2.1
5 x 6	18.5	3.42
5 x 10	20.5	4.2
5 x 16	22.5	5.06
5 x 25	27.5	7.56
5 x 35	34	11.56
5 x 50	40	16

Telecommunications cables

Type	Diameter mm	Usable cross-section cm ²
2 x 2 x 0.6	5	0.25
4 x 2 x 0.6	5.5	0.3
6 x 2 x 0.6	6.5	0.42
10 x 2 x 0.6	7.5	0.56
20 x 2 x 0.6	9	0.81
40 x 2 x 0.6	11	1.12
60 x 2 x 0.6	13	1.69
100 x 2 x 0.6	17	2.89
200 x 2 x 0.6	23	5.29
2 x 2 x 0.8	6	0.36
4 x 2 x 0.8	7	0.49
6 x 2 x 0.8	8.5	0.72
10 x 2 x 0.8	9.5	0.9
20 x 2 x 0.8	13	1.69
40 x 2 x 0.8	16.5	2.72
60 x 2 x 0.8	20	4
100 x 2 x 0.8	25.5	6.5
200 x 2 x 0.8	32	10.24



Coax cable (standard)

Type	Diameter mm	Usable cross-section cm ²
SAT/BK cable	6.8	0.48



IT cables type Cat...

Type	Diameter mm	Usable cross-section cm ²
Cat. 5	8	0.64
Cat. 6	8	0.64



Processing materials with the correct tool

Different materials must be processed differently. Chop saws have proved to be very useful when laying device installation trunking. This allows exact cutting.

Trunking made of PVC and PC/ABS:

- Hand saw, fine-tooth (iron saw)
- Piercing saw with iron or plastic saw blade with fine teeth
- Circular saw with plastic saw blade, 350 mm diameter, 80–108 teeth/inch and 2,800 rpm

Sheet steel and aluminium trunking:

- Ribbon saw with saw ribbon for hard metals
- Circular saw with saw blade for hard metals, 350 mm diameter, 80–108 teeth/inch and 2,800 rpm
- Angle grinder with metal separating disc

Thermal expansion coefficient:

- Steel: 14×10^{-6} 1/K
- Aluminium: 23.1×10^{-6} 1/K
- Hard PVC: 71×10^{-6} 1/K

Take the length expansion of the materials into account

Different materials expand differently and this must be taken into account. The expansion of the materials PVC, steel and aluminium can be calculated using the formula below.

$$\Delta L = L \cdot \alpha \cdot \Delta T$$

L = Length m

α = Thermal expansion co-efficient

ΔT = Temperature change

Examples

At a temperature difference ΔT of 20 °C, the 2,000 mm standard length changes as follows:

- For hard PVC, 2.84 mm
- For steel, 0.56 mm
- For aluminium, 0.924 mm

Perfect interplay for more efficient working

Faster and better installation sequences – this is the aim of both ourselves and the manufacturers of electrical devices. Previously used bolt-firing devices have thus become modern nail guns. With its Pulsa 700E, Spit can offer devices of the highest quality for this area of the electrical industry. Many OBO products can be processed particularly efficiently using the devices. This is proved by tests for mounting cable and device installation trunking, carried out with Spit devices.

Properties of the hard PVC used

Property	Value	DIN
Material designation	PVC-U-E-D-08-04-28	to DIN 7748
Tensile strength	min. 40 N/mm ²	to DIN 53 455
Crack expansion	min. 85%	to DIN 53 455
Breakdown voltage	min. 20 KV/mm	to DIN 53 481
Surface resistance	min. 1010 Ohm	to DIN 53 455
Shape heat resistance	min. 75 °C	to DIN 53 400/B
Temperature resistance in the application	max. 65 °C	
Flammability	Level V0	to UL 94

You can find more details in the chapter "Chemical resistance of hard PVC" in the "Additional information" part.

Halogen-free cable routing systems



Low smoke gas production, low corrosion, safe. Halogen-free installation materials belong in any fire protection plan.

This is what it's all about:

- If there is a fire, halogen-free materials reduce the amount of toxic smoke gases. They do not create any corrosive substances.
- In many public buildings, insurance companies require halogen-free materials to protect people and property.
- Particularly in public areas, halogen-free OBO cable routing systems are a safe choice.

Dangerous smoke gases from plastics

Plastics have good insulating properties and can be processed easily. However, during a fire, they can create aggressive gases. A danger to people and property.

Heavy smoke creation

Flame-protection agents, based on halogen compounds such as fluorine, iodine, chlorine and bromine, are used to keep the flammability of PVC low. If there is a fire, this safety aspect becomes a dangerous disadvantage: Toxic smoke gases, such as carbon dioxide and carbon monoxide, are created. These usually endanger people far faster than flames and heat. For example, in the fire catastrophe at Düsseldorf Airport in 1996 or in the Tauern Tunnel in 1999, considerable quantities of burned plastics contributed to the formation of smoke and hazardous substances. A highly toxic mixture, which can be lethal after just a few breaths.

Corrosive fire gases

PVC releases corrosive hydrogen chloride gas, which, in conjunction with water, forms hydrochloric acid. Hydrochloric acid has a highly caustic effect on the respiratory channels. As an electrically conductive substance, it can cause short circuits and destroy devices. Additional corrosive combustion gas products are cyanide and ammonia. In addition, extremely toxic dioxins can damage the building to such an extent that the reconstruction of parts of the building is very expensive or even impossible.

Therefore, from a fire protection perspective, halogen-free installation materials are a safe alternative. The Association of Property Insurers also prescribes halogen-free materials for building areas in which many people meet. The term "halogen-free" excludes any organic chlorine or bromine compounds.



The new standard for cable routing with plastic trunking

OBO halogen-free cable routing systems protect people, the environment and property. All the products are made from high-quality PC/ABS (polycarbonate/acrylonitrile butadiene styrene). This material is one of the self-extinguishing plastics.

For safe cable routing, OBO can offer halogen-free WDKH wall and ceiling trunking, as well as halogen-free VKH wiring trunking for switching cabinet construction. A new feature of the product range is the Rapid 80 device installation trunking system GKH, which is completely halogen-free, along with all of its fittings. OBO makes the three cable routing systems available in all the standard dimensions. They are easy to mount and are stable, are produced to a high level of quality and are dimensionally stable.

Rapid 80 GKH halogen-free

Rapid 80 device installation trunking allows flexible and quick access to energy and data on the wall. It is primarily used in public facilities and offices.

WDKH halogen-free

OBO wall and ceiling trunking ensures safe cable routing. It can be used as wall or ceiling trunking.

VKH halogen-free

OBO wiring trunking from our Dahl system ensures tidy, clear wiring in a switching cabinet.

The safety aspects

- Low smoke creation
- Low toxicity of the smoke gases
- Scarcely any release of corrosive gases
- Perfectly suited for public areas

HALOGEN
FREE



Individual special colours



Plastic trunking

The wide range of standard colours and the many possible special colours mean that it is possible to integrate the colour of the cable routing systems into any office landscape. The plastic cable routing trunking and device installation trunking systems are available in the RAL colours pure white (RAL 9010), light grey (RAL 7035), grey (RAL 7030) and cream (RAL 9001) as standard.

Sheet steel and aluminium trunking

The device installation trunking systems and service poles are made of sheet steel or aluminium and are available in the standard colours pure white, light grey and cream. Powder coating means that all the other RAL colours are possible on sheet steel and aluminium trunking. Alternatively to the RAL standard, both NCS and DB colours can be applied on request.



Colour deviations

Material-dependent colour deviations may occur on PVC trunking and fittings. Causes for this are the different degrees in gloss of the different surfaces. They only absorb part of the light. "Silky matt" painted surfaces and "matted" surfaces on moulded parts have diffe-

rent structures and thus different levels of gloss. Absolute evenness is impossible. With a shiny surface, a colour appears lighter (greater reflection) and, with a matt surface, darker (greater absorption). Measurement of the differences is therefore extremely difficult.



Powder coatings for indoor use Three materials. One system.

Versatile. Attractive. Robust.

Powdered surface coatings offer a wide range of options. They turn a standard product into an individual solution, whose colour and function are matched exactly to your requirements. The colour and structure ensure a decorative exterior, whilst the coating properties offer high resistance to chemicals, very good corrosion protection and the best possible insulation properties.


Basic	Sheet steel or aluminium
Coating	Epoxy powder coating
Standard colours	RAL 9010, pure white RAL 9001, cream RAL 7035, light grey
Special colours	RAL, NCS and DB colours Metallic colours
Surface structure	Standard structure: Smooth transitions Diverse variants from fine to coarse
Surface shine level	Standard shininess: Approx. 22% Diverse variants from matt to high-gloss
Variants	Anti-bacterial High resistance to abrasion









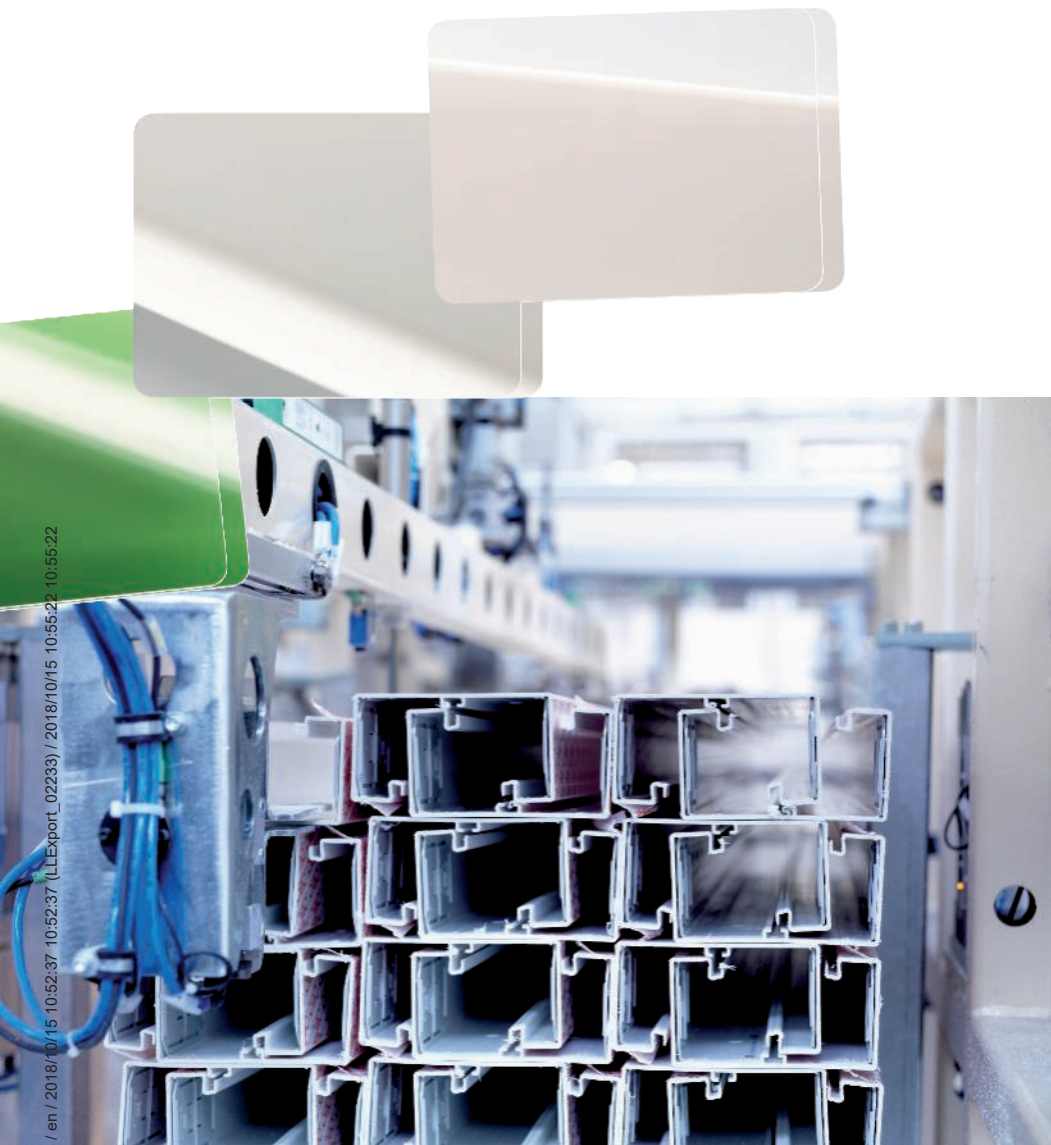




Plastic surfaces

OBO uses high-quality plastics with the best material properties. The PVC withstands high and low temperatures, as well as UV radiation, various chemicals and high mechanical loads. In addition, the halogen-free variants possess perfect fire protection properties, as they prevent corrosive smoke gases.

Plastic types
Polyvinylchloride (PVC)
Polycarbonate/acrylonitrile butadiene styrene (PC/ABS)




WDK cable routing trunking systems, plastic

	Mini trunking	18
	Nominal height 15 mm	25
	Nominal height 20 mm	29
	Nominal height 25 mm	33
	Nominal height 30 mm	36
	Nominal height 40 mm	38
	Nominal height 60 mm	44
	Nominal height 60 mm, device installation	47
	Trunking height 80 mm	54
	Nominal height 100 mm	56
	Universal trunking	62




Mini trunking

Mini trunking with adhesive film M7




Type	Colour	Length mm	For cable Ø mm	Pack. Weight		Item No.
				m	kg/100 m	
WDKM7	Traffic white	2000	4 - 5.5	176	3.100	6150071
PVC Polyvinylchloride Mini trunking .						

Mini trunking with adhesive film M9




Type	Colour	Length mm	For cable Ø mm	Pack. Weight		Item No.
				m	kg/100 m	
WDKM9	Traffic white	2000	6 - 8	140	4.100	6150098
PVC Polyvinylchloride Mini trunking .						

Mini trunking with adhesive film M11




Type	Colour	Length mm	For cable Ø mm	Pack. Weight		Item No.
				m	kg/100 m	
WDKM11	Traffic white	2000	8 - 10	104	4.900	6150101
PVC Polyvinylchloride Mini trunking .						

Mini trunking with adhesive film and hinge cover MD4




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKMD4RW	Pure white	2000	224	3.300	6150268
WDKMD4CW	Cream	2000	224	3.300	6150152
PVC Polyvinylchloride Mini trunking .					

Mini trunking with adhesive film and hinge cover MD7



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKMD7RW	Pure white	2000	100	5.000	6150276
WDKMD7CW	Cream	2000	100	5.000	6150160
PVC Polyvinylchloride Mini trunking .					

Mini trunking with adhesive film and hinge cover MD12




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKMD12RW	Pure white	—	80	7.000	6150284
WDKMD12CW	Cream	—	80	7.000	6150179
PVC Polyvinylchloride Mini trunking .					

Mini trunking with adhesive film and hinge cover MD17

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKMD17RW	Pure white	2000	56	9.000	6150292
WDKMD17CW	Cream	2000	56	9.000	6150187

PVC Polyvinylchloride

Mini trunking .



Shears for WDK trunking, straight cut

Type	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Cutters for WDK trunking up to dimensions 25 x 45 mm.



Shears for WDK trunking, mitre cut

Type	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel


Shears for mitre cuts of the WDK trunking up to the dimensions 25 x 45 mm.





▶ Trunking height 10 mm, trunking width 20 mm

Trunking, type WDK 10020 with base perforation




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10020RW	Pure white	2000	96	10.000	6150764
WDK10020CW	Cream	2000	96	10.000	6150756

PVC Polyvinylchloride

Trunking cover and base.

Joint cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS10020RW	Pure white	22	14	10	0.090	6154026
WDK HS10020CW	Cream	22	14	10	0.103	6152007

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.

Internal corner cover





Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10020RW	Pure white	30	4	0.285	6154328
WDK HI10020CW	Cream	30	4	0.285	6153003

PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA10020RW	Pure white	30	4	0.344	6154417
WDK HA10020CW	Cream	30	4	0.600	6153291

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10020RW	Pure white	40	4	0.365	6154212
WDK HF10020CW	Cream	40	4	0.365	6152600

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover



Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10020RW	Pure white	45	4	0.334	6154115
WDK HT10020CW	Cream	45	4	0.334	6152309

PVC Polyvinylchloride


T-piece hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10020RW	Pure white	—	11	10	0.106	6154514
WDK HE10020CW	Cream	—	11	10	0.106	6153593


PVC Polyvinylchloride

End piece for closing the WDK trunking.



Trunking height 10 mm, trunking width 30 mm

Trunking, type WDK 10030




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10030RW	Pure white	2000	64	13.000	6150780
WDK10030CW	Cream	2000	64	13.000	6150772

PVC Polyvinylchloride

Trunking cover and base.

Joint cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS10030RW	Pure white	32	14	10	0.115	6154034
WDK HS10030CW	Cream	32	14	10	0.115	6152015

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.

Internal corner cover





Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10030RW	Pure white	30	—	4	0.330	6154336
WDK HI10030CW	Cream	30	—	4	0.330	6153011

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA10030RW	Pure white	30	—	4	0.450	6154425
WDK HA10030CW	Cream	30	—	4	0.450	6153305

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10030RW	Pure white	50	—	4	0.555	6154220
WDK HF10030CW	Cream	50	—	4	0.555	6152619

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10030RW	Pure white	55	44	4	0.455	6154123
WDK HT10030CW	Cream	55	44	4	0.455	6152317

PVC Polyvinylchloride


T-piece hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10030RW	Pure white	10	0.139	6154522
WDK HE10030CW	Cream	10	0.139	6153607

PVC Polyvinylchloride


End piece to close the WDK trunking.





▶ Trunking height 15 mm, trunking width 15 mm

Trunking, type WDK 15015




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15015RW	Pure white	2000	56	9.000	6191002
WDK15015CW	Cream	2000	56	9.000	6024963
WDK15015LGR	Light grey	2000	56	9.000	6024947
WDK15015GR	Stone grey	2000	56	9.000	6024955

PVC Polyvinylchloride

Trunking cover and base .

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15015RW	Pure white	10	0.082	6193099
WDK HE15015CW	Cream	10	0.081	6162495
WDK HE15015LGR	Light grey	10	0.081	6183603
WDK HE15015GR	Stone grey	10	0.081	6158692

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 15030 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15030RW	Pure white	2000	32	19.500	6191010
WDK15030CW	Cream	2000	32	19.500	6025013
WDK15030GR	Stone grey	2000	32	19.500	6025005

PVC Polyvinylchloride

Trunking cover and base.




Joint cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15030RW	Pure white	32	14	10	0.136	6193501
WDK HS15030CW	Cream	32	14	10	0.136	6152031
WDK HS15030GR	Stone grey	32	14	10	0.136	6158838

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.





Internal corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15030RW	Pure white	38.5	—	4	0.789	6191843
WDK HI15030CW	Cream	38.5	—	4	0.790	6160026
WDK HI15030GR	Stone grey	38.5	—	4	0.790	6158234

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.





External corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15030RW	Pure white	38.5	—	4	1.114	6192149
WDK HA15030CW	Cream	38.5	—	4	1.096	6160611
WDK HA15030GR	Stone grey	38.5	—	4	1.114	6158358

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15030RW	Pure white	53	—	4	0.965	6192750
WDK HF15030CW	Cream	53	—	4	0.965	6161219
WDK HF15030GR	Stone grey	53	—	4	0.965	6158595

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




T-piece cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15030RW	Pure white	73	53	4	1.119	6192459
WDK HT15030CW	Cream	73	53	4	1.119	6161928
WDK HT15030GR	Stone grey	73	53	4	1.119	6158463

PVC Polyvinylchloride


T-piece hood for changing the direction of the WDK trunking.





▶ Trunking height 15 mm, trunking width 30 mm

▶ End piece



Type	Colour	Pack.		Weight	Item No.
		pcs	kg/100 pcs.		
WDK HE15030RW	Pure white	10	0.230		6193102
WDK HE15030CW	Cream	10	0.235		6162517
WDK HE15030GR	Stone grey	10	0.230		6158714

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 15040 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15040RW	Pure white	2000	36	23.000	6191029
WDK15040CW	Cream	2000	36	23.000	6025161
WDK15040GR	Stone grey	2000	36	23.000	6025137

PVC Polyvinylchloride

Trunking cover and base.





Joint cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15040RW	Pure white	42	14	10	0.190	6193528
WDK HS15040CW	Cream	42	14	10	0.190	6152058
WDK HS15040GR	Stone grey	42	14	10	0.190	6158846

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.




Internal corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15040RW	Pure white	42	—	4	1.070	6191851
WDK HI15040CW	Cream	42	—	4	1.064	6160034
WDK HI15040GR	Stone grey	42	—	4	1.064	6158242

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.





External corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15040RW	Pure white	42	—	4	1.429	6192157
WDK HA15040CW	Cream	42	—	4	1.400	6160638
WDK HA15040GR	Stone grey	42	—	4	1.400	6158366

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15040RW	Pure white	63	—	4	1.471	6192769
WDK HF15040CW	Cream	63	—	4	1.500	6161227
WDK HF15040GR	Stone grey	63	—	4	1.500	6158609

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




T-piece cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15040RW	Pure white	83	74	4	1.746	6192467
WDK HT15040CW	Cream	83	74	4	1.746	6161936
WDK HT15040GR	Stone grey	83	74	4	1.746	6158471

PVC Polyvinylchloride


T-piece hood for changing the direction of the WDK trunking.





Trunking height 15 mm, trunking width 40 mm

End piece



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
WDK HE15040RW	Pure white	10	0.299	6193110
WDK HE15040CW	Cream	10	0.299	6162525
WDK HE15040GR	Stone grey	10	0.299	6158722

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 20020 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20020RW	Pure white	2000	48	11.100	6191037
WDK20020CW	Cream	2000	48	11.100	6025153
WDK20020LGR	Light grey	2000	48	11.100	6025102
WDK20020GR	Stone grey	2000	48	11.100	6025110

PVC Polyvinylchloride

Trunking cover and base .





Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20020RW	Pure white	38.5	—	4	0.619	6191878
WDK HI20020CW	Cream	38.5	—	4	0.623	6160018
WDK HI20020LGR	Light grey	38.5	—	4	0.623	6182011
WDK HI20020GR	Stone grey	38.5	—	4	0.623	6158226

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20020RW	Pure white	38.5	—	4	0.678	6192165
WDK HA20020CW	Cream	38.5	—	4	0.678	6160603
WDK HA20020LGR	Light grey	38.5	—	4	0.678	6182402
WDK HA20020GR	Stone grey	38.5	—	4	0.678	6158331

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20020RW	Pure white	38	—	4	0.588	6192777
WDK HF20020CW	Cream	38	—	4	0.596	6161200
WDK HF20020LGR	Light grey	38	—	4	0.596	6183212
WDK HF20020GR	Stone grey	38	—	4	0.596	6158587

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.




T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20020RW	Pure white	57	53.5	4	0.751	6192475
WDK HT20020CW	Cream	57	53.5	4	0.751	6161901
WDK HT20020LGR	Light grey	57	53.5	4	0.751	6182801
WDK HT20020GR	Stone grey	57	53.5	4	0.751	6158455

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20020RW	Pure white	10	0.103	6193129
WDK HE20020CW	Cream	10	0.101	6162509
WDK HE20020LGR	Light grey	10	0.101	6183611
WDK HE20020GR	Stone grey	10	0.101	6158706

PVC Polyvinylchloride


End piece to close the WDK trunking.





▶ Trunking height 20 mm, trunking width 35 mm

Trunking, type WDK 20035




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20035RW	Pure white	2000	32	23.900	6191045
WDK20035CW	Cream	2000	32	23.900	6026370
WDK20035LGR	Light grey	2000	32	23.900	6026354
WDK20035GR	Stone grey	2000	32	23.900	6026362

PVC Polyvinylchloride

Trunking cover and base .

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20035RW	Pure white	10	0.334	6193137
WDK HE20035CW	Cream	10	0.334	6162487
WDK HE20035LGR	Light grey	10	0.334	6183654
WDK HE20035GR	Stone grey	10	0.334	6158781

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 20050

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20050RW	Pure white	2000	42	30.700	6168736
WDK20050CW	Cream	2000	42	30.700	6168701

PVC Polyvinylchloride

Trunking cover and base .




Trunking, type WDK-N 20050

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N20050RW	Pure white	2000	42	37.000	6168744
WDK-N20050CW	Cream	2000	42	37.000	6168728

PVC Polyvinylchloride

Trunking cover and base .




Joint cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS20050RW	Pure white	53	14	10	0.267	6154069
WDK HS20050CW	Cream	53	14	10	0.267	6152104

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.




Internal corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20050RW	Pure white	45	—	4	1.277	6154360
WDK HI20050CW	Cream	45	—	4	2.500	6153089

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20050RW	Pure white	45	—	4	1.765	6154468
WDK HA20050CW	Cream	45	—	4	3.000	6153372

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20050RW	Pure white	73	—	4	1.948	6154255
WDK HF20050CW	Cream	73	—	4	1.948	6152686

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.





▶ Trunking height 20 mm, trunking width 50 mm

T-piece cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20050RW	Pure white	93	73	4	2.146	6154166
WDK HT20050CW	Cream	93	73	4	2.146	6152384

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20050RW	Pure white	10	0.425	6154557
WDK HE20050CW	Cream	10	0.600	6153674

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 25025

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25025RW	Pure white	2000	30	24.500	6191053
WDK25025CW	Cream	2000	30	24.500	6026427
WDK25025LGR	Light grey	2000	30	24.500	6026400
WDK25025GR	Stone grey	2000	30	24.500	6026419

PVC Polyvinylchloride

Trunking cover and base.




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25025RW	Pure white	50	—	4	1.150	6191886
WDK HI25025CW	Cream	50	—	4	1.669	6160042
WDK HI25025LGR	Light grey	50	—	4	1.669	6182062
WDK HI25025GR	Stone grey	50	—	4	1.669	6158250

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25025RW	Pure white	52	—	4	1.424	6192173
WDK HA25025CW	Cream	52	—	4	1.424	6160646
WDK HA25025LGR	Light grey	52	—	4	1.424	6182445
WDK HA25025GR	Stone grey	52	—	4	1.424	6158374

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25025RW	Pure white	48	—	4	1.055	6192785
WDK HF25025CW	Cream	48	—	4	1.000	6161235
WDK HF25025LGR	Light grey	48	—	4	1.000	6183255
WDK HF25025GR	Stone grey	48	—	4	1.000	6158617

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.




T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25025RW	Pure white	68	48	4	1.171	6192483
WDK HT25025CW	Cream	68	48	4	1.171	6161944
WDK HT25025LGR	Light grey	68	48	4	1.171	6182852
WDK HT25025GR	Stone grey	68	48	4	1.171	6158498

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25025RW	Pure white	10	0.303	6193145
WDK HE25025CW	Cream	10	0.303	6162533
WDK HE25025LGR	Light grey	10	0.303	6183662
WDK HE25025GR	Stone grey	10	0.303	6158730


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 25 mm, trunking width 40 mm


Trunking, type WDK 25040



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25040RW	Pure white	2000	24	30.000	6191061
WDK25040CW	Cream	2000	24	30.000	6026451
WDK25040GR	Stone grey	2000	24	30.000	6026443

PVC Polyvinylchloride
Trunking cover and base .


Trunking, type WDK-N 25040



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N25040RW	Pure white	2000	36	36.000	6150640
WDK-N25040CW	Cream	2000	36	36.000	6150632

PVC Polyvinylchloride
Trunking cover and base .



Joint cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS25040RW	Pure white	42	14	10	0.500	6193560
WDK HS25040CW	Cream	42	14	10	0.500	6152082
WDK HS25040GR	Stone grey	42	14	10	0.500	6158889

PVC Polyvinylchloride
Joint cover for smooth connection of trunking segments.


Internal corner cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25040RW	Pure white	50	—	4	1.502	6191894
WDK HI25040CW	Cream	50	—	4	1.489	6160050
WDK HI25040GR	Stone grey	50	—	4	1.489	6158269

PVC Polyvinylchloride
Internal corner hood for changing the direction of the WDK trunking.


External corner cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25040RW	Pure white	52	—	4	2.052	6192181
WDK HA25040CW	Cream	52	—	4	2.052	6160654
WDK HA25040GR	Stone grey	52	—	4	2.052	6158382

PVC Polyvinylchloride
External corner hood for changing the direction of the WDK trunking.

Flat angle cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25040RW	Pure white	63	—	4	1.905	6192793
WDK HF25040CW	Cream	63	—	4	1.905	6161243
WDK HF25040GR	Stone grey	63	—	4	1.905	6158625

PVC Polyvinylchloride
Flat angle hood for changing the direction of the WDK trunking.




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25040RW	Pure white	83	63	4	1.994	6192491
WDK HT25040CW	Cream	83	63	4	1.994	6161952
WDK HT25040GR	Stone grey	83	63	4	1.994	6158501

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

T-piece cover




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25040RW	Pure white	10	0.404	6193153
WDK HE25040CW	Cream	10	0.404	6162541
WDK HE25040GR	Stone grey	10	0.404	6158749

PVC Polyvinylchloride


End piece to close the WDK trunking.

End piece



Trunking height 30 mm, trunking width 30 mm

Trunking, type WDK 30030





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30030RW	Pure white	2000	40	24.900	6191096
WDK30030CW	Cream	2000	40	24.900	6026826
WDK30030LGR	Light grey	2000	40	24.900	6026796
WDK30030GR	Stone grey	2000	40	24.900	6026818

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI30030RW	Pure white	52	—	4	1.345	6191924
WDK HI30030CW	Cream	52	—	4	1.200	6160077
WDK HI30030LGR	Light grey	52	—	4	1.349	6182097
WDK HI30030GR	Stone grey	52	—	4	1.200	6158285

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA30030RW	Pure white	57	—	4	1.776	6192211
WDK HA30030CW	Cream	57	—	4	1.809	6160670
WDK HA30030LGR	Light grey	57	—	4	1.809	6182488
WDK HA30030GR	Stone grey	57	—	4	1.809	6158404

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF30030RW	Pure white	53	—	4	1.370	6192815
WDK HF30030CW	Cream	53	—	4	1.370	6161278
WDK HF30030LGR	Light grey	53	—	4	1.370	6183298
WDK HF30030GR	Stone grey	53	—	4	1.370	6158641

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT30030RW	Pure white	50	39	4	1.542	6192513
WDK HT30030CW	Cream	50	39	4	1.485	6161979
WDK HT30030LGR	Light grey	50	39	4	1.485	6182887
WDK HT30030GR	Stone grey	50	39	4	1.485	6158536

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30030RW	Pure white	10	0.363	6193188
WDK HE30030CW	Cream	10	0.365	6162576
WDK HE30030LGR	Light grey	10	0.365	6183697
WDK HE30030GR	Stone grey	10	0.365	6158765

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 30045

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30045RW	Pure white	2000	48	32.000	6191118
WDK30045CW	Cream	2000	48	32.000	6026869
WDK30045LGR	Light grey	2000	48	32.000	6026842
WDK30045GR	Stone grey	2000	48	32.000	6026850

PVC Polyvinylchloride

Trunking cover and base .





Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI30045RW	Pure white	52	—	4	1.295	6191932
WDK HI30045CW	Cream	52	—	4	1.295	6160085
WDK HI30045LGR	Light grey	52	—	4	1.295	6182100
WDK HI30045GR	Stone grey	52	—	4	1.295	6158307

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA30045RW	Pure white	57	—	4	2.319	6192238
WDK HA30045CW	Cream	57	—	4	2.319	6160689
WDK HA30045LGR	Light grey	57	—	4	2.319	6182496
WDK HA30045GR	Stone grey	57	—	4	2.319	6158420

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF30045RW	Pure white	68	—	4	1.922	6192823
WDK HF30045CW	Cream	68	—	4	1.922	6161286
WDK HF30045LGR	Light grey	68	—	4	1.922	6183301
WDK HF30045GR	Stone grey	68	—	4	1.922	6158676

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT30045RW	Pure white	88	68	4	3.000	6192521
WDK HT30045CW	Cream	88	68	4	3.000	6161987
WDK HT30045LGR	Light grey	88	68	4	3.000	6182895
WDK HT30045GR	Stone grey	88	68	4	3.000	6158552

PVC Polyvinylchloride

T-piece cover for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30045RW	Pure white	10	0.514	6193196
WDK HE30045CW	Cream	10	0.509	6162584
WDK HE30045LGR	Light grey	10	0.509	6183700
WDK HE30045GR	Stone grey	10	0.509	6158803


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 40 mm, trunking width 40 mm

Trunking, type WDK 40040





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40040RW	Pure white	2000	36	42.100	6191126
WDK40040CW	Cream	2000	36	42.100	6025412
WDK40040LGR	Light grey	2000	36	42.100	6027016
WDK40040GR	Stone grey	2000	36	42.100	6025447

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40040RW	Pure white	65	—	4	2.502	6191940
WDK HI40040CW	Cream	65	—	4	2.502	6160093
WDK HI40040LGR	Light grey	65	—	4	2.502	6182119
WDK HI40040GR	Stone grey	65	—	4	2.502	6158293

PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40040RW	Pure white	66	—	4	3.139	6192246
WDK HA40040CW	Cream	66	—	4	3.139	6160697
WDK HA40040LGR	Light grey	66	—	4	3.139	6182526
WDK HA40040GR	Stone grey	66	—	4	3.139	6158412

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT40040RW	Pure white	83	43	4	2.681	6192548
WDK HT40040CW	Cream	83	43	4	2.681	6161995
WDK HT40040LGR	Light grey	83	43	4	2.681	6182917
WDK HT40040GR	Stone grey	83	43	4	2.681	6158544

PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40040RW	Pure white	63	—	4	2.534	6192831
WDK HF40040CW	Cream	63	—	4	2.534	6161294
WDK HF40040LGR	Light grey	63	—	4	2.534	6183336
WDK HF40040GR	Stone grey	63	—	4	2.534	6158668

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40040RW	Pure white	10	0.602	6193218
WDK HE40040CW	Cream	10	0.615	6162592
WDK HE40040LGR	Light grey	10	0.602	6183727
WDK HE40040GR	Stone grey	10	0.602	6158773

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 40060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40060RW	Pure white	2000	24	56.200	6191134
WDK40060CW	Cream	2000	24	56.200	6020887
WDK40060LGR	Light grey	2000	24	56.200	6027024
WDK40060GR	Stone grey	2000	24	56.200	6025633

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40060RW	Pure white	110	—	2	7.363	6191959
WDK HI40060CW	Cream	110	—	2	7.363	6160107
WDK HI40060LGR	Light grey	110	—	2	7.363	6182127
WDK HI40060GR	Stone grey	110	—	2	7.363	6021719

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40060RW	Pure white	100	—	2	8.653	6192254
WDK HA40060CW	Cream	100	—	2	8.653	6160700
WDK HA40060LGR	Light grey	100	—	2	8.653	6182534
WDK HA40060GR	Stone grey	100	—	2	8.653	6021697

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40060RW	Pure white	190	63	2	9.801	6192556
WDK HK40060CW	Cream	190	63	2	9.801	6162002
WDK HK40060LGR	Light grey	190	63	2	9.801	6182925
WDK HK40060GR	Stone grey	190	63	2	9.801	6023312

PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40060RW	Pure white	101	—	2	6.271	6192858
WDK HF40060CW	Cream	101	—	2	6.271	6161308
WDK HF40060LGR	Light grey	101	—	2	6.271	6183344
WDK HF40060GR	Stone grey	101	—	2	6.271	6021735

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40060RW	Pure white	10	1.136	6193226
WDK HE40060CW	Cream	10	1.147	6162606
WDK HE40060LGR	Light grey	10	1.148	6183735
WDK HE40060GR	Stone grey	10	1.144	6021492

PVC Polyvinylchloride


End piece to close the WDK trunking.





Trunking height 40 mm, trunking width 90 mm

Trunking, type WDK 40090




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40090RW	Pure white	2000	32	77.300	6191142
WDK40090CW	Cream	2000	32	77.300	6020895
WDK40090LGR	Light grey	2000	32	77.300	6027032
WDK40090GR	Stone grey	2000	32	77.300	6021018

PVC Polyvinylchloride

Trunking cover and base .

Joint cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS40090RW	Pure white	90	39	20	0.857	6193580
WDK HS40090CW	Cream	90	39	20	0.857	6193582

PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.

Internal corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40090RW	Pure white	109	—	2	9.468	6191967
WDK HI40090CW	Cream	109	—	2	9.468	6160115
WDK HI40090LGR	Light grey	109	—	2	9.468	6182135
WDK HI40090GR	Stone grey	109	—	2	9.468	6021190

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40090RW	Pure white	100	—	2	9.638	6192262
WDK HA40090CW	Cream	100	—	2	9.638	6160719
WDK HA40090LGR	Light grey	100	—	2	9.638	6182542
WDK HA40090GR	Stone grey	100	—	2	9.638	6021093

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40090RW	Pure white	230	91	2	13.986	6192564
WDK HK40090CW	Cream	230	91	2	13.986	6162010
WDK HK40090LGR	Light grey	230	91	2	13.986	6182933
WDK HK40090GR	Stone grey	230	91	2	13.986	6023142

PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.

Flat angle cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40090RW	Pure white	129	—	2	11.246	6192866
WDK HF40090CW	Cream	129	—	2	11.246	6161316
WDK HF40090LGR	Light grey	129	—	2	11.246	6183352
WDK HF40090GR	Stone grey	129	—	2	11.246	6021336

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40090RW	Pure white	10	1.576	6193234
WDK HE40090CW	Cream	10	1.576	6162614
WDK HE40090LGR	Light grey	10	1.566	6183743
WDK HE40090GR	Stone grey	10	1.576	6021506

PVC Polyvinylchloride


End piece to close the WDK trunking.





Trunking height 40 mm, trunking width 110 mm

Trunking, type WDK 40110




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40110RW	Pure white	2000	24	111.800	6191150
WDK40110CW	Cream	2000	24	111.800	6020909
WDK40110LGR	Light grey	2000	24	111.800	6027040
WDK40110GR	Stone grey	2000	24	111.800	6021034

PVC Polyvinylchloride

Trunking cover and base .

Joint cover





Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS40110RW	Pure white	110	39	20	1.100	6193586
WDK HS40110CW	Cream	110	39	20	1.100	6193588

PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.

Internal corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40110RW	Pure white	110.5	—	2	9.726	6191975
WDK HI40110CW	Cream	110.5	—	2	9.726	6160123
WDK HI40110LGR	Light grey	110.5	—	2	9.726	6182143
WDK HI40110GR	Stone grey	110.5	—	2	9.726	6021727

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40110RW	Pure white	100	—	2	13.500	6192270
WDK HA40110CW	Cream	100	—	2	13.500	6160727
WDK HA40110LGR	Light grey	100	—	2	13.500	6182550
WDK HA40110GR	Stone grey	100	—	2	13.500	6021700

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40110RW	Pure white	272	112	2	18.882	6192572
WDK HK40110CW	Cream	272	112	2	18.882	6162029
WDK HK40110LGR	Light grey	272	112	2	18.882	6182941
WDK HK40110GR	Stone grey	272	112	2	18.882	6023339

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40110RW	Pure white	110	—	2	13.000	6192874
WDK HF40110CW	Cream	110	—	2	13.000	6161324
WDK HF40110LGR	Light grey	110	—	2	13.000	6183360
WDK HF40110GR	Stone grey	110	—	2	11.751	6021743

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40110RW	Pure white	10	1.919	6193242
WDK HE40110CW	Cream	10	1.859	6162622
WDK HE40110LGR	Light grey	10	1.859	6183751
WDK HE40110GR	Stone grey	10	1.859	6021514


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 60 mm, trunking width 60 mm

Trunking, type WDK 60060




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60060RW	Pure white	2000	32	81.600	6191193
WDK60060CW	Cream	2000	32	81.600	6021948
WDK60060LGR	Light grey	2000	32	81.600	6027105
WDK60060GR	Stone grey	2000	32	81.600	6025668

PVC Polyvinylchloride

Trunking cover and base .

Internal corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60060RW	Pure white	130	—	2	10.932	6192017
WDK HI60060CW	Cream	130	—	2	10.932	6160301
WDK HI60060LGR	Light grey	130	—	2	10.932	6182194
WDK HI60060GR	Stone grey	130	—	2	10.932	6022383

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60060RW	Pure white	100	—	2	9.931	6192319
WDK HA60060CW	Cream	100	—	2	9.931	6160905
WDK HA60060LGR	Light grey	100	—	2	9.931	6182593
WDK HA60060GR	Stone grey	100	—	2	9.931	6022073

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60060RW	Pure white	190	65	2	12.876	6192610
WDK HK60060CW	Cream	190	65	2	12.876	6162207
WDK HK60060LGR	Light grey	190	65	2	12.876	6183018
WDK HK60060GR	Stone grey	190	65	2	12.876	6023223

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60060RW	Pure white	101	—	2	7.846	6192912
WDK HF60060CW	Cream	101	—	2	8.016	6161502
WDK HF60060LGR	Light grey	101	—	2	8.243	6183409
WDK HF60060GR	Stone grey	101	—	2	8.016	6022448

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60060RW	Pure white	10	1.551	6193285
WDK HE60060CW	Cream	10	1.551	6162800
WDK HE60060LGR	Light grey	10	1.551	6183808
WDK HE60060GR	Stone grey	10	1.544	6022499

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 60090

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60090RW	Pure white	2000	24	110.000	6191207
WDK60090CW	Cream	2000	24	110.000	6021913
WDK60090LGR	Light grey	2000	24	110.000	6027113
WDK60090GR	Stone grey	2000	24	110.000	6022006

PVC Polyvinylchloride

Trunking cover and base .




Joint cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS60090RW	Pure white	94	18	20	1.002	6193590
WDK HS60090CW	Cream	94	18	20	1.008	6193592

PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.





Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60090RW	Pure white	130	—	2	12.989	6192025
WDK HI60090CW	Cream	130	—	2	12.989	6160328
WDK HI60090LGR	Light grey	130	—	2	12.989	6182208
WDK HI60090GR	Stone grey	130	—	2	12.989	6022219

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60090RW	Pure white	100	—	2	10.965	6192327
WDK HA60090CW	Cream	100	—	2	10.965	6160913
WDK HA60090LGR	Light grey	100	—	2	10.965	6182607
WDK HA60090GR	Stone grey	100	—	2	10.965	6022111

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60090RW	Pure white	230	65	2	16.992	6192629
WDK HK60090CW	Cream	230	65	2	16.992	6162215
WDK HK60090LGR	Light grey	230	65	2	16.992	6183026
WDK HK60090GR	Stone grey	230	65	2	16.992	6023002

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60090RW	Pure white	129	—	2	11.454	6192920
WDK HF60090CW	Cream	129	—	2	11.454	6161510
WDK HF60090LGR	Light grey	129	—	2	11.454	6183417
WDK HF60090GR	Stone grey	129	—	2	11.454	6022316

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.





Trunking height 60 mm, trunking width 90 mm

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60090RW	Pure white	10	2.315	6193293
WDK HE60090CW	Cream	10	2.337	6162819
WDK HE60090LGR	Light grey	10	2.337	6183816
WDK HE60090GR	Stone grey	10	2.337	6022502

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 60230

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60230RW	Pure white	2000	8	298.000	6191274
WDK60230CW	Cream	2000	8	298.000	6021891
WDK60230LGR	Light grey	2000	8	298.000	6027180
WDK60230GR	Stone grey	2000	8	298.000	6022057

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60230RW	Pure white	130	—	2	22.509	6192092
WDK HI60230CW	Cream	130	—	2	22.509	6160395
WDK HI60230LGR	Light grey	130	—	2	22.509	6182267
WDK HI60230GR	Stone grey	130	—	2	22.509	6024440

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60230RW	Pure white	100	—	2	24.645	6192394
WDK HA60230CW	Cream	100	—	2	24.645	6160980
WDK HA60230LGR	Light grey	100	—	2	24.645	6182674
WDK HA60230GR	Stone grey	100	—	2	24.645	6024548

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60230RW	Pure white	291	66	2	39.600	6192696
WDK HK60230CW	Cream	291	66	2	39.600	6162290
WDK HK60230LGR	Light grey	291	66	2	39.600	6183085
WDK HK60230GR	Stone grey	291	66	2	39.600	6024777

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60230RW	Pure white	270	—	2	47.856	6192998
WDK HF60230CW	Cream	270	—	2	47.856	6161596
WDK HF60230LGR	Light grey	270	—	2	47.856	6183484
WDK HF60230GR	Stone grey	270	—	2	47.856	6024602

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60230RW	Pure white	10	6.283	6193366
WDK HE60230CW	Cream	10	6.283	6162886
WDK HE60230LGR	Light grey	10	6.283	6183875
WDK HE60230GR	Stone grey	10	6.283	6024831


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 60 mm, trunking width 110 mm, device installation

Trunking, type WDK 60110




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60110RW	Pure white	2000	16	117.000	6191215
WDK60110CW	Cream	2000	16	117.000	6021840
WDK60110LGR	Light grey	2000	16	117.000	6027121
WDK60110GR	Stone grey	2000	16	117.000	6022014

PVC Polyvinylchloride

Trunking cover and base .

Joint cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS60110RW	Pure white	113	18	20	1.142	6193596
WDK HS60110CW	Cream	113	18	20	1.142	6193598

PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60110RW	Pure white	130	—	2	13.254	6192033
WDK HI60110CW	Cream	130	—	2	13.312	6160336
WDK HI60110LGR	Light grey	130	—	2	13.102	6182216
WDK HI60110GR	Stone grey	130	—	2	13.312	6022235

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60110RW	Pure white	100	—	2	13.226	6192335
WDK HA60110CW	Cream	100	—	2	13.017	6160921
WDK HA60110LGR	Light grey	100	—	2	13.226	6182615
WDK HA60110GR	Stone grey	100	—	2	13.049	6022146

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60110RW	Pure white	272	65	2	22.905	6192637
WDK HK60110CW	Cream	272	65	2	22.905	6162223
WDK HK60110LGR	Light grey	272	65	2	22.905	6183034
WDK HK60110GR	Stone grey	272	65	2	22.905	6023029

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60110RW	Pure white	149	—	2	14.273	6192939
WDK HF60110CW	Cream	149	—	2	14.399	6161529
WDK HF60110LGR	Light grey	149	—	2	14.399	6183425
WDK HF60110GR	Stone grey	149	—	2	14.399	6022332

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60110RW	Pure white	10	2.937	6193307
WDK HE60110CW	Cream	10	2.934	6162827
WDK HE60110LGR	Light grey	10	2.912	6183824
WDK HE60110GR	Stone grey	10	2.951	6022588


PVC Polyvinylchloride

End piece for closing the WDK trunking.



Trunking height 60 mm, trunking width 130 mm, device installation

Trunking, type WDK 60130





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60130RW	Pure white	2000	16	135.000	6191223
WDK60130CW	Cream	2000	16	135.000	6021859
WDK60130LGR	Light grey	2000	16	135.000	6027148
WDK60130GR	Stone grey	2000	16	135.000	6022022

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60130RW	Pure white	130	—	2	13.526	6192041
WDK HI60130CW	Cream	130	—	2	13.526	6160344
WDK HI60130LGR	Light grey	130	—	2	13.526	6182224
WDK HI60130GR	Stone grey	130	—	2	13.526	6022251

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60130RW	Pure white	100	—	2	14.327	6192343
WDK HA60130CW	Cream	100	—	2	14.327	6160948
WDK HA60130LGR	Light grey	100	—	2	14.327	6182623
WDK HA60130GR	Stone grey	100	—	2	14.327	6022162

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60130RW	Pure white	272	65	2	23.968	6192645
WDK HK60130CW	Cream	272	65	2	23.968	6162231
WDK HK60130LGR	Light grey	272	65	2	23.968	6183042
WDK HK60130GR	Stone grey	272	65	2	23.968	6023045

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60130RW	Pure white	170	—	2	17.118	6192947
WDK HF60130CW	Cream	170	—	2	17.272	6161537
WDK HF60130LGR	Light grey	170	—	2	17.272	6183433
WDK HF60130GR	Stone grey	170	—	2	17.272	6022359

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60130RW	Pure white	10	3.610	6193315
WDK HE60130CW	Cream	10	3.596	6162835
WDK HE60130LGR	Light grey	10	3.655	6183832
WDK HE60130GR	Stone grey	10	3.578	6022529

PVC Polyvinylchloride



End piece to close the WDK trunking.

Trunking, type WDK 60150

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60150RW	Pure white	2000	8	175.000	6191231
WDK60150CW	Cream	2000	8	175.000	6021883
WDK60150LGR	Light grey	2000	8	175.000	6027156
WDK60150GR	Stone grey	2000	8	175.000	6022030

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60150RW	Pure white	130	—	2	14.449	6192068
WDK HI60150CW	Cream	130	—	2	14.449	6160379
WDK HI60150LGR	Light grey	130	—	2	14.449	6182232
WDK HI60150GR	Stone grey	130	—	2	14.449	6024432

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60150RW	Pure white	100	—	2	17.452	6192351
WDK HA60150CW	Cream	100	—	2	17.452	6160972
WDK HA60150LGR	Light grey	100	—	2	17.452	6182631
WDK HA60150GR	Stone grey	100	—	2	17.452	6024521

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60150RW	Pure white	291	66	2	26.831	6192653
WDK HK60150CW	Cream	291	66	2	26.831	6162274
WDK HK60150LGR	Light grey	291	66	2	26.831	6183050
WDK HK60150GR	Stone grey	291	66	2	26.831	6024769

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60150RW	Pure white	190	—	2	19.910	6192955
WDK HF60150CW	Cream	190	—	2	19.910	6161561
WDK HF60150LGR	Light grey	190	—	2	19.910	6183441
WDK HF60150GR	Stone grey	190	—	2	19.910	6024599

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60150RW	Pure white	10	4.118	6193323
WDK HE60150CW	Cream	10	4.223	6162878
WDK HE60150LGR	Light grey	10	4.827	6183840
WDK HE60150GR	Stone grey	10	4.223	6024823



PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 60 mm, trunking width 170 mm, device installation

Trunking, type WDK 60170




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60170RW	Pure white	2000	8	178.000	6191258
WDK60170CW	Cream	2000	8	178.000	6021867
WDK60170LGR	Light grey	2000	8	178.000	6027164
WDK60170GR	Stone grey	2000	8	178.000	6022049

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60170RW	Pure white	130	—	2	12.472	6192076
WDK HI60170CW	Cream	130	—	2	12.472	6160352
WDK HI60170LGR	Light grey	130	—	2	12.472	6182240
WDK HI60170GR	Stone grey	130	—	2	12.472	6022286

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60170RW	Pure white	100	—	2	17.750	6192378
WDK HA60170CW	Cream	100	—	2	17.750	6160956
WDK HA60170LGR	Light grey	100	—	2	17.750	6182658
WDK HA60170GR	Stone grey	100	—	2	17.750	6022189

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60170RW	Pure white	291	66	2	32.600	6192661
WDK HK60170CW	Cream	291	66	2	32.600	6162258
WDK HK60170LGR	Light grey	291	66	2	32.600	6183069
WDK HK60170GR	Stone grey	291	66	2	32.600	6023061

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60170RW	Pure white	211	—	2	22.774	6192963
WDK HF60170CW	Cream	211	—	2	22.774	6161545
WDK HF60170LGR	Light grey	211	—	2	22.774	6183468
WDK HF60170GR	Stone grey	211	—	2	22.774	6022375

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60170RW	Pure white	10	4.859	6193331
WDK HE60170CW	Cream	10	4.859	6162843
WDK HE60170LGR	Light grey	10	4.859	6183859
WDK HE60170GR	Stone grey	10	4.859	6022545

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 60210

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60210RW	Pure white	2000	8	258.000	6191266
WDK60210CW	Cream	2000	8	258.000	6021875
WDK60210LGR	Light grey	2000	8	258.000	6027172
WDK60210GR	Stone grey	2000	8	258.000	6022065

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60210RW	Pure white	130	—	2	17.594	6192084
WDK HI60210CW	Cream	130	—	2	17.594	6160360
WDK HI60210LGR	Light grey	130	—	2	17.594	6182259
WDK HI60210GR	Stone grey	130	—	2	17.594	6022294

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60210RW	Pure white	100	—	2	20.357	6192386
WDK HA60210CW	Cream	100	—	2	20.357	6160964
WDK HA60210LGR	Light grey	100	—	2	20.357	6182666
WDK HA60210GR	Stone grey	100	—	2	20.357	6022197

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60210RW	Pure white	291	66	2	35.280	6192688
WDK HK60210CW	Cream	291	66	2	35.280	6162266
WDK HK60210LGR	Light grey	291	66	2	35.280	6183077
WDK HK60210GR	Stone grey	291	66	2	35.280	6023126

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60210RW	Pure white	250	—	2	30.182	6192971
WDK HF60210CW	Cream	250	—	2	38.000	6161553
WDK HF60210LGR	Light grey	250	—	2	38.000	6183476
WDK HF60210GR	Stone grey	250	—	2	38.000	6022391

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60210RW	Pure white	10	5.475	6193358
WDK HE60210CW	Cream	10	5.674	6162851
WDK HE60210LGR	Light grey	10	5.400	6183867
WDK HE60210GR	Stone grey	10	5.479	6022561


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 80 mm, trunking width 170 mm

Trunking, type WDK 80170




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80170RW	Pure white	2000	8	214.000	6191304
WDK80170CW	Cream	2000	8	214.000	6026176
WDK80170LGR	Light grey	2000	8	214.000	6027229
WDK80170GR	Stone grey	2000	8	214.000	6026184

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80170RW	Pure white	150	—	2	20.000	6192106
WDK HI80170CW	Cream	150	—	2	20.000	6160484
WDK HI80170LGR	Light grey	150	—	2	20.000	6182305
WDK HI80170GR	Stone grey	150	—	2	20.000	6024467

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80170RW	Pure white	150	—	2	27.500	6192416
WDK HA80170CW	Cream	150	—	2	27.500	6161103
WDK HA80170LGR	Light grey	150	—	2	27.500	6182712
WDK HA80170GR	Stone grey	150	—	2	27.500	6024564

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80170RW	Pure white	282	173	2	29.000	6192718
WDK HK80170CW	Cream	282	173	2	29.000	6162401
WDK HK80170LGR	Light grey	282	173	2	29.000	6183123
WDK HK80170GR	Stone grey	282	173	2	29.000	6024793

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80170RW	Pure white	206	—	2	27.500	6193021
WDK HF80170CW	Cream	206	—	2	27.500	6161707
WDK HF80170LGR	Light grey	206	—	2	27.500	6183522
WDK HF80170GR	Stone grey	206	—	2	27.500	6024610

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80170RW	Pure white	10	11.900	6193387
WDK HE80170CW	Cream	10	11.900	6163009
WDK HE80170LGR	Light grey	10	11.900	6183913
WDK HE80170GR	Stone grey	10	11.900	6024858

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 80210

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80210RW	Pure white	2000	8	240.000	6191312
WDK80210CW	Cream	2000	8	240.000	6026206
WDK80210LGR	Light grey	2000	8	240.000	6027237
WDK80210GR	Stone grey	2000	8	240.000	6026192

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80210RW	Pure white	150	—	2	21.500	6192110
WDK HI80210CW	Cream	150	—	2	21.500	6160492
WDK HI80210LGR	Light grey	150	—	2	21.500	6182313
WDK HI80210GR	Stone grey	150	—	2	21.500	6024475

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80210RW	Pure white	150	—	2	32.000	6192420
WDK HA80210CW	Cream	150	—	2	32.000	6161111
WDK HA80210LGR	Light grey	150	—	2	32.000	6182720
WDK HA80210GR	Stone grey	150	—	2	32.000	6024572

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80210RW	Pure white	282	213	2	34.500	6192722
WDK HK80210CW	Cream	282	213	2	34.500	6162428
WDK HK80210LGR	Light grey	282	213	2	34.500	6183131
WDK HK80210GR	Stone grey	282	213	2	34.500	6024807

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80210RW	Pure white	247	—	2	35.000	6193025
WDK HF80210CW	Cream	247	—	2	35.000	6161715
WDK HF80210LGR	Light grey	247	—	2	35.000	6183530
WDK HF80210GR	Stone grey	247	—	2	35.000	6024629

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80210RW	Pure white	10	14.500	6193391
WDK HE80210CW	Cream	10	14.500	6163017
WDK HE80210LGR	Light grey	10	14.500	6183921
WDK HE80210GR	Stone grey	10	14.500	6024874


PVC Polyvinylchloride

End piece to close the WDK trunking.



Trunking height 100 mm, trunking width 130 mm

Trunking, type WDK 100130




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100130RW	Pure white	2000	8	214.000	6191347
WDK100130CW	Cream	2000	8	214.000	6026273
WDK100130LGR	Light grey	2000	8	214.000	6027245
WDK100130GR	Stone grey	2000	8	214.000	6026281

PVC Polyvinylchloride

Trunking cover and base.

Internal corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100130RW	Pure white	170	—	2	17.500	6192114
WDK HI100130CW	Cream	170	—	2	17.500	6160522
WDK HI100130LGR	Light grey	170	—	2	17.500	6182348
WDK HI100130GR	Stone grey	170	—	2	17.500	6024483

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100130RW	Pure white	170	—	2	27.000	6192424
WDK HA100130CW	Cream	170	—	2	27.000	6161154
WDK HA100130LGR	Light grey	170	—	2	27.000	6182747
WDK HA100130GR	Stone grey	170	—	2	27.000	6024580

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.

T and intersection cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100130RW	Pure white	282	133	2	31.500	6192726
WDK HK100130CW	Cream	282	133	2	31.500	6162452
WDK HK100130LGR	Light grey	282	133	2	31.500	6183166
WDK HK100130GR	Stone grey	282	133	2	31.500	6024815

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100130RW	Pure white	166	—	2	22.500	6193029
WDK HF100130CW	Cream	166	—	2	22.500	6161758
WDK HF100130LGR	Light grey	166	—	2	22.500	6183557
WDK HF100130GR	Stone grey	166	—	2	22.500	6024637

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100130RW	Pure white	10	8.200	6193395
WDK HE100130CW	Cream	10	8.200	6163041
WDK HE100130LGR	Light grey	10	8.200	6183956
WDK HE100130GR	Stone grey	10	8.200	6024882

PVC Polyvinylchloride


End piece to close the WDK trunking.

Trunking, type WDK 100230

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100230RW	Pure white	2000	4	338.000	6191355
WDK100230CW	Cream	2000	4	338.000	6026338
WDK100230LGR	Light grey	2000	4	338.000	6027253
WDK100230GR	Stone grey	2000	4	338.000	6026311

PVC Polyvinylchloride

Trunking cover and base .




Internal corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100230RW	Pure white	170	—	2	27.000	6192118
WDK HI100230CW	Cream	170	—	2	27.000	6160549
WDK HI100230LGR	Light grey	170	—	2	27.000	6182364
WDK HI100230GR	Stone grey	170	—	2	27.000	6024505

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.




External corner cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100230RW	Pure white	170	—	2	30.000	6192428
WDK HA100230CW	Cream	170	—	2	30.000	6161170
WDK HA100230LGR	Light grey	170	—	2	30.000	6182763
WDK HA100230GR	Stone grey	170	—	2	30.000	6024688

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.




T and intersection cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100230RW	Pure white	282	233	2	39.000	6192730
WDK HK100230CW	Cream	282	233	2	39.000	6162479
WDK HK100230LGR	Light grey	282	233	2	39.000	6183182
WDK HK100230GR	Stone grey	282	233	2	39.000	6024718

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.




Flat angle cover

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100230RW	Pure white	266	—	2	48.000	6193033
WDK HF100230CW	Cream	266	—	2	48.000	6161774
WDK HF100230LGR	Light grey	266	—	2	48.000	6183573
WDK HF100230GR	Stone grey	266	—	2	48.000	6024653

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.



End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100230RW	Pure white	5	10.409	6193399
WDK HE100230CW	Cream	5	10.237	6163076
WDK HE100230LGR	Light grey	5	10.237	6183980
WDK HE100230GR	Stone grey	5	10.237	6024904


PVC Polyvinylchloride

End piece to close the WDK trunking.



Plastic cable routing trunking accessories

Partition




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.

Partition for trunking height 60 mm




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
2371 60	Light grey	2000	40	17.000	6023118

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 60 mm trunking height for the installation of different voltage levels.

Partition for trunking height 80 mm




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
2371 80	Light grey	2000	40	33.000	6026982

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 80 mm trunking height for the installation of different voltage levels.

Partition for trunking height 100 mm




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
2371 100	Light grey	2000	20	40.000	6026990

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 100 mm trunking height for the installation of different voltage levels.

Device socket, type 2390




Type	Colour	Length mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
2390	Light grey		5	4.398	6023207

PVC Polyvinylchloride

Accessory mounting box for the installation of devices with support rings and support clamps in WDK cable routing trunking of 60 mm trunking height. The device socket is placed on the floor connectors and fastened in the centre with a bolt.

Cover for single accessory mounting box, trunking height 110 mm



Type	Colour	Length mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
D2-1 110RW	Pure white	300	10	8.000	6194036
D2-1 110CW	Cream	300	10	8.000	6169309

PVC Polyvinylchloride


Cover section, single, for device installation in WDK trunking.

Cover for double accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 110GR	Stone grey	300	10	6.500	6159370
D2-2 110CW	Cream	300	10	6.500	6169376
D2-2 110RW	Pure white	300	10	6.500	6194109

PVC Polyvinylchloride

Cover section, double, for device installation in WDK trunking.




Cover for accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 110CW	Cream	300	10	5.000	6169430
D2-3 110RW	Pure white	300	10	5.000	6194184

PVC Polyvinylchloride

Cover section, triple, for device installation in WDK trunking.




Cover for single accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 130RW	Pure white	300	10	9.000	6194044
D2-1 130CW	Cream	300	10	9.000	6169317

PVC Polyvinylchloride

Cover section, single, for device installation in WDK trunking.




Cover for double accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 130RW	Pure white	300	10	7.500	6194117
D2-2 130CW	Cream	300	10	7.500	6169384

PVC Polyvinylchloride

Cover section, double, for device installation in WDK trunking.




Cover for triple accessory mounting box, trunking height 130 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 130RW	Pure white	300	10	6.200	6194192
D2-3 130CW	Cream	300	10	6.200	6169449

PVC Polyvinylchloride

Cover section, triple, for device installation in WDK trunking.




Cover for single accessory mounting box, trunking height 150 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 150RW	Pure white	300	10	10.000	6194052


PVC Polyvinylchloride

Cover section, single, for device installation in WDK trunking.



Plastic cable routing trunking accessories

Cover for double accessory mounting box, trunking height 150 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 150RW	Pure white	300	10	9.000	6194125
D2-2 150CW	Cream	300	10	9.000	6169368

PVC Polyvinylchloride

Cover section, double, for device installation in WDK trunking.

Cover for triple accessory mounting box, trunking height 150 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 150RW	Pure white	300	10	9.500	6194206
D2-3 150CW	Cream	300	10	9.500	6169422

PVC Polyvinylchloride

Cover section, triple, for device installation in WDK trunking.

Cover for single accessory mounting box, trunking height 170 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 170RW	Pure white	300	10	13.400	6194060
D2-1 170CW	Cream	300	10	13.400	6169325

PVC Polyvinylchloride

Cover section, single, for device installation in WDK trunking.

Cover for double accessory mounting box, trunking height 170 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 170RW	Pure white	300	10	12.000	6194133

PVC Polyvinylchloride

Cover section, double, for device installation in WDK trunking.

Cover for triple accessory mounting box, trunking height 170 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 170RW	Pure white	300	10	10.300	6194214

PVC Polyvinylchloride

Cover section, triple, for device installation in WDK trunking.

Cover for double accessory mounting box, trunking height 210 mm



Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 210RW	Pure white	300	10	17.700	6194141

PVC Polyvinylchloride


Cover section, double, for device installation in WDK trunking.

CEE accessory mounting box

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2392	Light grey	5	10.500	6024009

PA/GF Polyamide, fibreglass reinforced

Underfloor box for mounting CEE sockets in WDK trunking. Also suitable as concealed installation box for CEE sockets.





CEE adapter flange 16 A

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 16	Stone grey	110	96	5	2.401	6024025

PVC Polyvinylchloride

Adapter flange for mounting CEE 16 A sockets. During the mounting of the CEE mounting box, the adapter flange is mounted behind the trunking cover for accessory mounting boxes. Suitable for 400 V CEE 16 A 5-pin 6h, art. no. 6109874.




CEE adapter flange 32 A

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 32	Stone grey	110	96	5	4.000	6024033

PVC Polyvinylchloride

Intermediate flange for CEE 32 A sockets.




Knock-in anchor

Type	Dowel Ø mm	Length mm	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
910 SD 6X35	6	35	1200	100	0.310	2351056


PA Polyamide

Knock-in anchor: steel, electrogalvanised and transparently passivated.



Universal trunking

End piece



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-E1117LGR	Light grey	175	127	2	13.500	6156231
RK-E1117GR	Stone grey	175	127	2	13.500	6156223

PVC Polyvinylchloride

End piece for fastening and side closing of the universal trunking. The required fastening clips, type 2955 GL, are included.

Cover




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 110LGR	Light grey	2000	16	34.000	6028152
2410 110GR	Stone grey	2000	16	34.000	6022715

PVC Polyvinylchloride

Cover for creating the universal trunking.

Front cover




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 170LGR	Light grey	2000	52	56.700	6028187
2410 170GR	Stone grey	2000	52	56.700	6022758

PVC Polyvinylchloride

Front cover for creating the universal trunking.

Cover clip



Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK-K1117	120	166	2	9.000	6156207

SI Steel

FS Strip-galvanised








Cover clip for fixing the covers of the universal trunking. These are required to prevent the covers from sagging.






05_LFS | Produkteinheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 / 10:52:37 (LLExport_02299) / 2018/10/15 10:55:22 10:55:22

WDKH, cable routing trunking systems, halogen-free

	Halogen-free, nominal height 10 mm	66
	Halogen-free, nominal height 15 mm	67
	Halogen-free, nominal height 20 mm	68
	Halogen-free, nominal height 30 mm	69
	Halogen-free, nominal height 40 mm	70
	Halogen-free, nominal height 60 mm	71
	Accessories, WDKH halogen-free	74

Trunking height 10 mm, trunking width 20 mm, halogen-free

Trunking, type WDKH-H 10020 with base perforation




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-10020RW	Pure white	2000	96	8.500	6175375

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.

Internal corner cover





Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I10020RW	Pure white	30	4	0.252	6175572

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner hood




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A10020RW	Pure white	30	4	0.332	6175612

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F10020RW	Pure white	40	4	0.308	6175648

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T-piece hood




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T10020RW	Pure white	45	34	4	0.320	6175684

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDKH trunking.

End piece



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E10020RW	Pure white	—	11	10	0.092	6175540

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


End piece for closing the WDKH trunking.

Trunking, type WDK-H 15030 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-15030RW	Pure white	2000	48	15.000	6175390

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.





Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I15030RW	Pure white	38.5	4	0.677	6175578

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.





External corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A15030RW	Pure white	38.5	4	0.948	6175618

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.




Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F15030RW	Pure white	53	4	0.833	6175654

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.




T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T15030RW	Pure white	73	53	4	0.800	6175690

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E15030RW	Pure white	30	17	10	0.200	6175546


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.



Trunking height 20 mm, trunking width 20 mm, halogen-free

Trunking, type WDKH-20020




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-20020RW	Pure white	2000	48	8.800	6175400
WDKH-20020LGR	Light grey	2000	48	8.800	6175460

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.

Internal corner cover




Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I20020RW	Pure white	38.5	4	0.540	6175581
WDKH-I20020LGR	Light grey	38.5	4	0.450	6175964

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover




Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A20020RW	Pure white	38.5	4	0.578	6175624
WDKH-A20020LGR	Light grey	38.5	4	0.520	6176000

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover




Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F20020RW	Pure white	38	4	0.502	6175658
WDKH-F20020LGR	Light grey	38	4	0.502	6176036

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T-piece cover




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T20020RW	Pure white	57	53.5	4	0.520	6175694
WDKH-T20020LGR	Light grey	57	53.5	4	0.520	6176072

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E20020RW	Pure white	19	18	10	0.087	6175550
WDKH-E20020LGR	Light grey	19	18	10	0.089	6175928

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


End piece for closing the WDK-H trunking.

Trunking, type WDKH-30045

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-30045RW	Pure white	2000	48	24.900	6175405
WDKH-30045LGR	Light grey	2000	48	24.900	6175463

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.





Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I30045RW	Pure white	60	4	1.144	6175590
WDKH-I30045LGR	Light grey	60	4	1.144	6175968

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.




External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A30045RW	Pure white	57	4	2.000	6175626
WDKH-A30045LGR	Light grey	57	4	2.000	6176004

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.




Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F30045RW	Pure white	60	4	1.652	6175662
WDKH-F30045LGR	Light grey	60	4	1.652	6176040

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.




T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T30045RW	Pure white	130		4	2.400	6175698
WDKH-T30045LGR	Light grey	130		4	2.400	6176076

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E30045RW	Pure white	45	30	10	0.435	6175554
WDKH-E30045LGR	Light grey	45	30	10	0.500	6175932


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.



Trunking height 40 mm, trunking width 60 mm, halogen-free

Trunking, type WDKH 40060




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-40060RW	Pure white	2000	24	44.000	6175410
WDKH-40060LGR	Light grey	2000	24	44.000	6175466

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.

Internal corner cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I40060RW	Pure white	85	2	6.427	6175594
WDKH-I40060LGR	Light grey	85	2	6.427	6175972

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A40060RW	Pure white	45	2	7.423	6175630
WDKH-A40060LGR	Light grey	45	2	7.423	6176008

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F40060RW	Pure white	85	2	7.048	6175666
WDKH-F40060LGR	Light grey	85	2	7.048	6176044

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T and intersection cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T40060RW	Pure white	170	2	7.600	6175702
WDKH-T40060LGR	Light grey	170	2	7.600	6176080

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E40060RW	Pure white	40	60	10	0.992	6175558
WDKH-E40060LGR	Light grey	40	60	10	0.992	6175936

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


End piece for closing the WDK-H trunking.

Trunking, type WDKH-60090

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKH-60090RW	Pure white	2000	24	81.500	6175415
WDKH-60090LGR	Light grey	2000	24	81.500	6175469

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.





Internal corner cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-I60090RW	Pure white	130	2	10.700	6175598
WDKH-I60090LGR	Light grey	130	2	10.700	6175976

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.




External corner cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-A60090RW	Pure white	69	2	10.700	6175634
WDKH-A60090LGR	Light grey	69	2	10.700	6176012

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.




Flat angle cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-F60090RW	Pure white	129	2	9.696	6175670
WDKH-F60090LGR	Light grey	129	2	9.696	6176048

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.




T and intersection cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-T60090RW	Pure white	230	2	21.500	6175706
WDKH-T60090LGR	Light grey	230	2	21.500	6176084

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
WDKH-E60090RW	Pure white	90	60	10	2.024	6175562
WDKH-E60090LGR	Light grey	90	60	10	2.024	6175940


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.



Trunking height 60 mm, trunking width 110 mm, halogen-free

Trunking, type WDKH-60110





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-60110RW	Pure white	2000	16	95.900	6175420
WDKH-60110LGR	Light grey	2000	16	95.900	6175472

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.

Internal corner cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I60110RW	Pure white	130	2	11.315	6175602
WDKH-I60110LGR	Light grey	130	2	11.315	6175980

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A60110RW	Pure white	100	2	11.437	6175638
WDKH-A60110LGR	Light grey	100	2	11.338	6176016

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F60110RW	Pure white	149	2	12.984	6175674
WDKH-F60110LGR	Light grey	149	2	13.022	6176052

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T and intersection cover




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T60110RW	Pure white	272	65	2	21.000	6175710
WDKH-T60110LGR	Light grey	272	65	2	21.000	6176088

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E60110RW	Pure white	110	60	10	2.556	6175566
WDKH-E60110LGR	Light grey	110	60	10	2.528	6175944

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene



End piece for closing the WDK-H trunking.

Trunking, type WDKH-60150

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
WDKH-60150RW	Pure white	2000	8	146.650	6175425
WDKH-60150LGR	Light grey	2000	8	146.650	6175475

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.




Internal corner cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-I60150RW	Pure white	130	2	12.521	6175606
WDKH-I60150LGR	Light grey	130	2	12.521	6175984

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.




External corner cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-A60150RW	Pure white	100	2	15.180	6175642
WDKH-A60150LGR	Light grey	100	2	15.180	6176020

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.




Flat angle cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-F60150RW	Pure white	190	2	18.643	6175678
WDKH-F60150LGR	Light grey	190	2	18.643	6176056

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.




T and intersection cover

Type	Colour	Dimension a mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
WDKH-T60150RW	Pure white	291	2	21.800	6175714
WDKH-T60150LGR	Light grey	291	2	21.800	6176092

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.




End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
WDKH-E60150RW	Pure white	150	60	10	3.613	6175570
WDKH-E60150LGR	Light grey	150	60	10	3.736	6175948


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.



Accessories, WDKH, halogen-free


Cover clip, halogen-free 60



Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H60	Pure white	60	10	0.400	6176122
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Cover clip for better and easier laying of lines in the WDK trunking.


Cover clip, halogen-free 90



Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H90	Pure white	90	10	0.900	6176125
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Cover clip for better and easier laying of lines in the WDK trunking.


Cover clip, halogen-free 110



Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H110	Pure white	110	10	1.200	6176128
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Cover clip for better and easier laying of lines in the WDK trunking.


Cover clip, halogen-free 150



Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H150	Pure white	150	10	2.500	6176131
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Cover clip for better and easier laying of lines in the WDK trunking.


Partition, halogen-free 40



Type	Colour	Dimension a mm	Pack. m	Weight kg/100 m	Item No.
WDKH-TW40LGR	Light grey	2000	60	13.350	6175500
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Partition to divide the WDKH trunking of 40 mm trunking height for the installation of different voltage levels.

Partition, halogen-free 60



Type	Colour	Dimension a mm	Pack. m	Weight kg/100 m	Item No.
WDKH-TW60LGR	Light grey	2000	40	20.650	6175504
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Partition to divide the WDKH trunking of 60 mm trunking height for the installation of different voltage levels.






05_LFS_Produnkteinheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpert_02233) / 2018/10/15 10:55:22 10:55:22

LKM metal cable trunking systems

	Nominal height 20 mm	78
	Nominal height 30 mm	80
	Nominal height 40 mm	81
	Nominal height 60 mm	85
	Nominal height 80 mm	93
	Accessories	95

Trunking height 24 mm, trunking width 20 mm

Trunking, type LKM 20020



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM20020FS	—	2000	32	46.000	6246966
LKM20020RW	Pure white	2000	30	52.000	6248462



St Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.

Joint connector




Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV20	45	19.7	10	0.190	6247431

St Steel

G Electrogalvanised

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.

Edge protection ring



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR20020	Grey	28	24	5	0.900	6249842

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

LKM duct 20030


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM20030FS	—	2000	24	58.000	6246974
LKM20030RW	Pure white	2000	22	58.000	6248470

St Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV30	53.8	29.5	10	0.400	6247434

St Steel

G Electrogalvanised

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.




Edge protection ring

Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR20030	Grey	34	28	5	1.100	6249844


PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.



Trunking height 30 mm, trunking width 30 mm

Trunking, type LKM 30030



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM30030FS	—	2000	16	107.000	6246982
LKM30030RW	Pure white	2000	16	100.000	6248482



St Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.

Joint connector




Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV30	53.8	29.5	10	0.400	6247434

St Steel

G Electrogalvanised

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.

Edge protection ring



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR30030	Grey	34	34	5	1.300	6249845

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

Trunking, type LKM 40040


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM40040FS	—	2000	16	117.000	6246990
LKM40040RW	Pure white	2000	12	127.600	6248497

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV40	76	29.6	10	1.000	6247458

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.





Internal corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I40040FS	—	160	1	28.000	6247652
LKM I40040RW	Pure white	160	1	28.000	6249167

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A40040FS	—	160	1	38.600	6247563
LKM A40040RW	Pure white	160	1	38.600	6249086

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner including cover for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T40040FS	—	280	1	39.700	6247725
LKM T40040RW	Pure white	280	1	39.700	6249256

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece, including cover, for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F40040FS	—	160	1	37.100	6247490
LKM F40040RW	Pure white	160	1	37.100	6248993

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 40 mm, trunking width 40 mm

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E40040FS	—	40	38	10	2.500	6247881
LKM E40040RW	Pure white	40	38	10	2.500	6249418

SI Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR40040	Grey	47.7	44	5	1.800	6249846

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

Trunking, type LKM 40060


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM40060FS	—	2000	8	151.200	6247016
LKM40060RW	Pure white	2000	8	151.200	6248519

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV40	76	29.6	10	1.000	6247458

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I40060FS	—	160	1	31.400	6247660
LKM I40060RW	Pure white	160	1	31.400	6249175

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A40060FS	—	160	1	46.300	6247571
LKM A40060RW	Pure white	160	1	46.300	6249094

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T40060FS	—	300	1	46.800	6247733
LKM T40060RW	Pure white	300	1	46.800	6249264

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece, including cover, for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F40060FS	—	180	1	47.400	6247504
LKM F40060RW	Pure white	180	1	47.400	6249000

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 40 mm, trunking width 60 mm

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E40060FS	—	60	38	10	3.000	6247903
LKM E40060RW	Pure white	60	38	10	3.000	6249426

SI Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR40060	Grey	47	64	5	2.300	6249848

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.


Trunking, type LKM 60060

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60060FS	—	2000	8	174.700	6247091
LKM60060RW	Pure white	2000	8	174.700	6248608

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation. Equipotential bonding is guaranteed between the cover and the base without any additional aids. Note: LKM 60060 has no loop perforation in the base, a partition can not be installed.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247466

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.





Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60060FS	—	180	1	31.900	6248128
LKM I60060RW	Pure white	180	1	31.900	6249612

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60060FS	—	180	1	55.800	6248047
LKM A60060RW	Pure white	180	1	55.800	6249558

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60060FS	—	300	1	54.200	6248187
LKM T60060RW	Pure white	300	1	54.200	6249671

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece including cover for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60060FS	—	180	1	54.700	6247989
LKM F60060RW	Pure white	180	1	54.700	6249485

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 60 mm, trunking width 60 mm

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60060FS	—	63	60	10	4.500	6248284
LKM E60060RW	Pure white	63	60	10	4.500	6249795

Sl Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60060	Grey	67.7	64	5	2.400	6249850

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

LKM duct 60100


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60100FS	—	2000	8	221.700	6247113
LKM60100RW	Pure white	2000	8	221.700	6248624

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.




Duct clamp for maintenance of electrical function E30–E90

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM KF 60100	10	9.800	6249881

St Steel

FS Strip-galvanised

Duct clamp for the metal cable routing trunking type LKM 60100FS, prevents the cables falling out during installation. The duct clamp is essential if the trunking is used in cable systems with integrated maintenance of electrical function to DIN 4102, Part 12. Easy mounting through insertion into the loop perforation in the side wall.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247466

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.





Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60100FS	—	180	1	39.400	6248144
LKM I60100RW	Pure white	180	1	39.400	6249639

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60100FS	—	180	1	73.100	6248063
LKM A60100RW	Pure white	180	1	73.100	6249574

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60100FS	—	340	1	69.200	6248209
LKM T60100RW	Pure white	340	1	69.200	6249701

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece, including cover, for changing the direction of the LKM trunking.



Trunking height 60 mm, trunking width 100 mm

Flat angle




Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60100FS	—	220	1	63.400	6248004
LKM F60100RW	Pure white	220	1	63.400	6249507

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60100FS	—	100	63	10	6.200	6248306
LKM E60100RW	Pure white	100	63	10	6.500	6249817

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60100	Grey	104	67.7	5	3.400	6249852

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

Trunking, type LKM 60150



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60150FS	—	2000	8	280.100	6247148
LKM60150RW	Pure white	2000	8	280.100	6248640

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247466

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.





Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60150FS	—	180	1	48.400	6248152
LKM I60150RW	Pure white	180	1	48.400	6249647

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60150FS	—	180	1	91.300	6248071
LKM A60150RW	Pure white	180	1	91.300	6249582

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60150FS	—	390	1	87.600	6248217
LKM T60150RW	Pure white	390	1	87.600	6249728

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece, including cover, for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60150FS	—	270	1	113.500	6248012
LKM F60150RW	Pure white	270	1	113.500	6249515

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 60 mm, trunking width 150 mm

End piece




Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60150FS	—	150	63	10	8.400	6248314
LKM E60150RW	Pure white	150	63	10	9.000	6249825

SI Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60150	Grey	154	67.7	5	4.400	6249854

PVC Polyvinylchloride

Edge protection ring for the open ends of LKM cable trunking.

Trunking, type LKM 60200



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60200FS	—	2000	8	338.700	6247164
LKM60200RW	Pure white	2000	8	338.700	6248667

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV60	75	50	10	1.600	6247466

V2A Stainless steel, grade 301

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.




Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I60200FS	—	180	1	57.500	6248160
LKM I60200RW	Pure white	180	1	57.500	6249655

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A60200FS	—	180	1	114.000	6248098
LKM A60200RW	Pure white	180	1	114.000	6249590

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T60200FS	—	440	1	106.000	6248225
LKM T60200RW	Pure white	440	1	106.000	6249736

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece including cover for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F60200FS	—	320	1	154.400	6248020
LKM F60200RW	Pure white	320	1	154.400	6249523

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 60 mm, trunking width 200 mm

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E60200FS	—	200	63	10	10.800	6248322
LKM E60200RW	Pure white	200	63	10	11.500	6249833

SI Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR60200	Grey	204	67.7	5	4.700	6249856

PE Polyethylene

Edge protection ring for the open ends of LKM cable trunking.

Trunking, type LKM 80080


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM80080FS	—	2000	12	215.000	6247194
LKM80080RW	Pure white	2000	8	238.000	6248694

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Trunking cover and base with base perforation.

Equipotential bonding is guaranteed between the cover and the base without any additional aids.





Joint connector

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM SV80	75	65.6	10	1.300	6247472

St Steel

Joint connector to connect the bases. This creates the equipotential bonding between the trunking bases.





Internal corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM I80080FS	—	160	1	38.700	6248336
LKM I80080RW	Pure white	160	1	38.700	6248436

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

Internal corner for changing the direction of the LKM trunking.




External corner

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM A80080FS	—	200	1	75.300	6248332
LKM A80080RW	Pure white	200	1	75.300	6248432

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

External corner, including cover, for changing the direction of the LKM trunking.




T-piece

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM T80080FS	—	300	1	67.200	6248340
LKM T80080RW	Pure white	300	1	67.200	6248450

St Steel

FS Strip-galvanised FSK Strip galvanised/plastic-coated

T-piece, including cover, for changing the direction of the LKM trunking.




Flat angle

Type	Colour	Dimen- sion a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM F80080FS	—	240	1	80.000	6248328
LKM F80080RW	Pure white	240	1	80.000	6248428

St Steel


FS Strip-galvanised FSK Strip galvanised/plastic-coated

Flat angle, including cover, for changing the direction of LKM trunking.



Trunking height 80 mm, trunking width 80 mm

End piece




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM E80080FS	—	80	80	1	7.000	6248344
LKM E80080RW	Pure white	80	80	1	7.000	6248454

St Steel

FS Strip-galvanised **FSK** Strip galvanised/plastic-coated

End piece for closing the LKM trunking.

Edge protection ring



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSR80080	Grey	84	84	5	3.800	6249865

PE Polyethylene



Edge protection ring for the open ends of LKM cable trunking.

Partition

Type	Length mm	Dimen- sion a mm	Pack. m	Weight kg/100 m	Item No.
LKM TWS55	2000	55	32	53.000	6249876
LKM TWS75	2000	75	32	114.000	6249880

- St Steel
- FS Strip-galvanised

Partition to divide the LKM cable routing trunking, 60 mm trunking height, for different voltage levels.




Cable bracket, trunking width 100

Type	Dimen- sion a mm	Dimen- sion b mm	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM Z60	46	30	60 x 60	10	1.100	6249906

- St Steel
- FS Strip-galvanised

Cable bracket to fix cables in vertical routing.




Cable bracket, trunking width 100

Type	Dimen- sion a mm	Dimen- sion b mm	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM Z100	96	30	60 x 100 mm	10	2.100	6249922

- St Steel
- FS Strip-galvanised

Cable bracket to fix cables in vertical routing.




Cable bracket, trunking width 100

Type	Dimen- sion a mm	Dimen- sion b mm	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM Z150	146	30	60 x 150 mm	10	3.000	6249965

- St Steel
- FS Strip-galvanised

Cable bracket to fix cables in vertical routing.




Cable bracket, trunking width 100

Type	Dimen- sion a mm	Dimen- sion b mm	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM Z200	166	30	60 x 200 mm	10	3.600	6249981

- St Steel
- FS Strip-galvanised

Cable bracket to fix cables in vertical routing.




Duct clamp, trunking width 100


Type	Dimen- sion a mm	Dimen- sion b mm	Dimen- sion c mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM K80	25	80	48.5	20	2.700	6249884

- St Steel
- FS Strip-galvanised

The duct clamp keeps the inserted cables in the trunking, thus simplifying installation on walls and ceilings. The duct clamps are plugged onto the loop perforation and locked on the side wall. Suitable for trunking width 100 mm.



Duct clamp, trunking width 150 and 200



Type	Dimension a mm	Dimension b mm	Dimension c mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKM K140	25	140	48.5	20	3.600	6249888

St Steel

FS Strip-galvanised

The duct clamp keeps the inserted cables in the trunking, thus simplifying installation on walls and ceilings. The duct clamps are plugged onto the loop perforation and locked on the side wall. Suitable for trunking width 150 mm and 200 mm.







05_LFS_Produkteinheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpert_02233) / 2018/10/15 10:55:22 10:55:22




SKL skirting trunking systems

	Trunking width 50 mm	100
	Trunking width 70 mm	102
	Floor trunking	104



SKL skirting trunking, type SKL 50 D




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
SKL-50DRW	Pure white	2000	32	44.700	6199103
SKL-50DBU	Beech	2000	32	44.700	6199109

PVC Polyvinylchloride

Trunking cover and base with base perforation and dyed elastic connection lips.

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-SA50DRW	Pure white	10	0.500	6199180
SKL-SA50DBU	Beech	10	0.500	6199186

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.

Internal corner cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-I50DRW	Pure white	4	0.700	6199122
SKL-I50DBU	Beech	4	0.700	6199128

PVC Polyvinylchloride

Internal corner for changing the direction of the SKL trunking.

External corner cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-A50DRW	Pure white	2	1.200	6199133
SKL-A50DBU	Beech	2	1.200	6199139

PVC Polyvinylchloride

External corner for changing the direction of the SKL trunking.

End piece, left



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-EL50DRW	Pure white	10	0.500	6199150
SKL-EL50DBU	Beech	10	0.500	6199156

PVC Polyvinylchloride

End piece, left, for closing the SKL trunking.

End piece, right



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-ER50DRW	Pure white	10	0.500	6199163
SKL-ER50DBU	Beech	10	0.500	6199169

PVC Polyvinylchloride


End piece, right, for closing the SKL trunking.

Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-R DRW	Pure white	1	11.400	6199402

PVC Polyvinylchloride

Device support, universally equippable for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-Z DRW	Pure white	1	13.000	6199442
SKL-Z DBU	Beech	1	13.000	6199448

PVC Polyvinylchloride

Device support, universally equippable for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-DS DRW	Pure white	1	19.000	6199421
SKL-DS DBU	Beech	1	19.000	6199427

PVC Polyvinylchloride

Device support with a pre-wired double socket for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-45 DRW	Pure white	1	10.000	6199461
SKL-45 DBU	Beech	1	10.000	6199467



PVC Polyvinylchloride

Device support system for all SKL trunking, equippable with all Modul 45 devices.



Trunking width 70 mm

SKL skirting trunking, type SKL 70 D




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
SKL-70DRW	Pure white	2000	24	57.700	6199202
SKL-70DBU	Beech	2000	24	57.700	6199208

PVC Polyvinylchloride

Trunking cover and base with base perforation and dyed elastic connection lips.

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-SA70DRW	Pure white	10	0.600	6199281
SKL-SA70DBU	Beech	10	0.600	6199287

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.

Internal corner cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-I70DRW	Pure white	4	0.900	6199233
SKL-I70DBU	Beech	4	0.900	6199239

PVC Polyvinylchloride

Internal corner for changing the direction of the SKL trunking.

External corner cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-A70DRW	Pure white	2	1.500	6199232
SKL-A70DBU	Beech	2	1.500	6199238

PVC Polyvinylchloride

External corner for changing the direction of the SKL trunking.

End piece, left



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-EL70DRW	Pure white	10	0.600	6199251
SKL-EL70DBU	Beech	10	0.600	6199257

PVC Polyvinylchloride

End piece, left, for closing the SKL trunking.

End piece, right



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
SKL-ER70DRW	Pure white	10	0.600	6199262
SKL-ER70DBU	Beech	10	0.600	6199268

PVC Polyvinylchloride


End piece, right, for closing the SKL trunking.

Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-R DRW	Pure white	1	11.400	6199402

PVC Polyvinylchloride

Device support, universally equippable for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-Z DRW	Pure white	1	13.000	6199442
SKL-Z DBU	Beech	1	13.000	6199448

PVC Polyvinylchloride

Device support, universally equippable for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-DS DRW	Pure white	1	19.000	6199421
SKL-DS DBU	Beech	1	19.000	6199427

PVC Polyvinylchloride

Device support with a pre-wired double socket for all SKL trunking.




Device support

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKL-45 DRW	Pure white	1	10.000	6199461
SKL-45 DBU	Beech	1	10.000	6199467


PVC Polyvinylchloride

Device support system for all SKL trunking, equippable with all Modul 45 devices.



Floor trunking

Floor trunking, type 2650



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2650	Stone grey	2000	36	43.000	6020801
PVC	Polyvinylchloride				

Trunking cover and base with base perforation.






05_LFS_Produnkteilheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpert_02233) / 2018/10/15 10:55:22 10:55:22

VK wiring trunking system

	LK4 wiring trunking	108
	LK4/N wiring trunking with wire retaining lug	115
	LKV DIN wiring trunking	120
	LKV/N DIN wiring trunking with wire retaining lug	126
	Accessories	130

Wiring trunking, type LK4 15015





Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LK4 15015	Stone grey	2000	15x15	72	12.000	6178001	

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Wiring trunking, type LK4 30015




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LK4 30015	Stone grey	2000	15x30	40	18.000	6178003	

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LK4 D 15	Stone grey	20	2000	92	8.500	6178480

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 30025




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LK4 30025	Stone grey	2000	25x30	48	28.000	6178005	

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LK4 D 25	Stone grey	31	2000	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 40025



Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LK4 40025	Stone grey	2000	25x40	48	36.500	6178010	

PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 40040

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40040	Stone grey	2000	40x40	36	44.000	6178012

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	6178484

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 40060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40060	Stone grey	2000	60x40	24	57.000	6178014

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	6178486

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 40080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40080	Stone grey	2000	80x40	24	71.000	6178016



PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



LK4 wiring trunking

Cover




Type	Colour	Dimension		Pack. m	Weight		Item No.
		mm	mm		kg/100 m		
LK4 D 80	Stone grey	87	2000	12	27.000		6178488

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 40100




Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			mm	mm		kg/100 m		
LK4 40100	Stone grey	2000	100	40	24	85.500		6178018

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover




Type	Colour	Dimension		Pack. m	Weight		Item No.
		mm	mm		kg/100 m		
LK4 D 100	Stone grey	107.4	2000	12	35.500		6178490

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60015




Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			mm	mm		kg/100 m		
LK4 60015	Stone grey	2000	15	60	48	32.500		6178026

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover




Type	Colour	Dimension		Pack. m	Weight		Item No.
		mm	mm		kg/100 m		
LK4 D 15	Stone grey	20	2000	92	8.500		6178480

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60025



Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			mm	mm		kg/100 m		
LK4 60025	Stone grey	2000	25	60	32	46.000		6178028

PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 60040

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60040	Stone grey	2000	40x60	24	53.500	6178031

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	6178484

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 60060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60060	Stone grey	2000	60x60	32	64.500	6178033

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	6178486

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 60080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60080	Stone grey	2000	80x60	24	82.500	6178035



PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



LK4 wiring trunking

Cover




Type	Colour	Dimension		Pack. m	Weight		Item No.
		Length mm	a mm		m	kg/100 m	
LK4 D 80	Stone grey	2000	87	12	27.000		6178488

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60100




Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			W mm	H mm		m	kg/100 m	
LK4 60100	Stone grey	2000	100	60	16	100.000		6178037

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover





Type	Colour	Dimension		Pack. m	Weight		Item No.
		Length mm	a mm		m	kg/100 m	
LK4 D 100	Stone grey	2000	107.4	12	35.500		6178490

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60120





Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			W mm	H mm		m	kg/100 m	
LK4 60120	Stone grey	2000	120	60	8	117.000		6178039

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover




Type	Colour	Dimension		Pack. m	Weight		Item No.
		Length mm	a mm		m	kg/100 m	
LK4 D 120	Stone grey	2000	127.8	16	45.500		6178492

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80025



Type	Colour	Length mm	Dimension		Pack. m	Weight		Item No.
			W mm	H mm		m	kg/100 m	
LK4 80025	Stone grey	2000	25	80	32	61.000		6178050


PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Cover

Wiring trunking, type LK4 80040

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80040	Stone grey	2000	40x80	24	64.500	6178052

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	6178484

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 80060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80060	Stone grey	2000	60x80	24	76.000	6178054

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	6178486

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4 80080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80080	Stone grey	2000	80x80	16	95.500	6178056



PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



LK4 wiring trunking

Cover





Type	Colour	Dimension		Pack.	Weight		Item No.
		mm	mm		m	kg/100 m	
LK4 D 80	Stone grey	87	2000	12	27.000		6178488

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80100




Type	Colour	Length mm	Dimension		Pack.	Weight		Item No.
			mm	mm		m	kg/100 m	
LK4 80100	Stone grey	2000	100x80		16	111.500		6178059

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover





Type	Colour	Dimension		Pack.	Weight		Item No.
		mm	mm		m	kg/100 m	
LK4 D 100	Stone grey	107.4	2000	12	35.500		6178490

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80120





Type	Colour	Length mm	Dimension		Pack.	Weight		Item No.
			mm	mm		m	kg/100 m	
LK4 80120	Stone grey	2000	120x80		8	128.500		6178061

PVC Polyvinylchloride

Wiring duct including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover



Type	Colour	Dimension		Pack.	Weight		Item No.
		mm	mm		m	kg/100 m	
LK4 D 120	Stone grey	127.8	2000	16	45.500		6178492

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60015

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 60015	Stone grey	2000	15x60	48	41.000	6178201

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out.




Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 15	Stone grey	2000	20	92	8.500	6178480

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60025

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 60025	Stone grey	2000	25x60	32	48.500	6178203

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.




Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 25	Stone grey	2000	31	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 60040

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 60040	Stone grey	2000	40x60	24	56.000	6178205

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover



Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 40	Stone grey	2000	46.2	24	13.500	6178484

PVC Polyvinylchloride

Trunking cover for replacement requirements.





Wiring trunking, type LK4/N 60060



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 60060	Stone grey	2000	60x60		32	68.000	6178207
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						

Trunking cover for replacement requirements.


Wiring trunking, type LK4/N 60080



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 60080	Stone grey	2000	80x60		24	87.000	6178209
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						

Trunking cover for replacement requirements.



Wiring trunking, type LK4/N 60100



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 60100	Stone grey	2000	100x60		16	105.500	6178211
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						


Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60120

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 60120	Stone grey	2000	120x60	8	120.500	6178213

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.




Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 120	Stone grey	2000	127.8	16	45.500	6178492

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80025

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 80025	Stone grey	2000	25x80	32	65.000	6178225

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 25	Stone grey	2000	31	32	10.000	6178482

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LK4/N 80040

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 80040	Stone grey	2000	40x80	24	73.500	6178227

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.





Cover


Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LK4 D 40	Stone grey	2000	46.2	24	13.500	6178484

PVC Polyvinylchloride

Trunking cover for replacement requirements.





Wiring trunking, type LK4/N 80060



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 80060	Stone grey	2000	60x80		24	82.000	6178229
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						

Trunking cover for replacement requirements.



Wiring trunking, type LK4/N 80080



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 80080	Stone grey	2000	80x80		16	101.000	6178231
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						

Trunking cover for replacement requirements.


Wiring trunking, type LK4/N 80100



Type	Colour	Length mm	Dimension		Pack. m	Weight kg/100 m	Item No.
			W x H mm				
LK4 N 80100	Stone grey	2000	100x80		16	116.500	6178233
PVC Polyvinylchloride							

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover



Type	Colour	Dimen- sion a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
PVC Polyvinylchloride						



Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80120

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LK4 N 80120	Stone grey	2000	120x80	8	133.500	6178236

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.




Cover


Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		a mm	Length mm			
LK4 D 120	Stone grey	127.8	2000	16	45.500	6178492

PVC Polyvinylchloride

Trunking cover for replacement requirements.



Wiring trunking, type LKV 25025





Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 25025	Stone grey	2000	25x25	32	24.000	6178302	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 25	Stone grey	25	2000	36	9.500	6178504

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 37025





Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 37025	Stone grey	2000	25x37,5	32	31.500	6178305	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 25	Stone grey	25	2000	36	9.500	6178504

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 37037




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 37037	Stone grey	2000	37,5 x 37,5	60	40.500	6178307	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover



Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 37	Stone grey	37,5	2000	24	15.000	6178506

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring trunking, type LKV 50025

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 50025	Stone grey	2000	25x50	60	35.500	6178310	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.




Cover

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	m	kg/100 m		
LKV D 25	Stone grey	25	2000	36	9.500	6178504	

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV 50037

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 50037	Stone grey	2000	37,5 x 50	48	44.500	6178312	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.




Cover

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	m	kg/100 m		
LKV D 37	Stone grey	37.5	2000	24	15.000	6178506	

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV 50050

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 50050	Stone grey	2000	50x50	36	50.000	6178314	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.





Cover

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	m	kg/100 m		
LKV D 50	Stone grey	50	2000	24	17.500	6178508	

PVC Polyvinylchloride


Trunking cover for replacement requirements.



VK wiring duct



Wiring trunking, type LKV 50075




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 50075	Stone grey	2000	75x50	24	66.000	6178316	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 75	Stone grey	75	2000	12	23.000	6178510

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75025





Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75025	Stone grey	2000	25x75	40	48.500	6178320	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 25	Stone grey	25	2000	36	9.500	6178504

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75037




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75037	Stone grey	2000	37,5 x 75	32	58.500	6178322	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover



Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 37	Stone grey	37.5	2000	24	15.000	6178506

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring trunking, type LKV 75050

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75050	Stone grey	2000	50x75	24	67.500	6178324	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 50	Stone grey	50	2000	24	17.500	6178508

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV 75075

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75075	Stone grey	2000	75x75	16	80.000	6178326	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 75	Stone grey	75	2000	12	23.000	6178510

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV 75100

Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75100	Stone grey	2000	100x75	16	105.500	6178328	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 100	Stone grey	100	2000	12	34.500	6178512

PVC Polyvinylchloride



Trunking cover for replacement requirements.



VK wiring duct



Wiring trunking, type LKV 75125




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 75125	Stone grey	2000	125 x 75	8	128.500	6178330	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	mm	m	kg/100 m	
LKV D 125	Stone grey	125	2000	16	47.000	6178514	

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 10037




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 10037	Stone grey	2000	37,5x100	32	67.000	6178334	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	mm	m	kg/100 m	
LKV D 37	Stone grey	37.5	2000	24	15.000	6178506	

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 10050





Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKV 10050	Stone grey	2000	50x100	24	77.000	6178336	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover



Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			a mm	mm	m	kg/100 m	
LKV D 50	Stone grey	50	2000	24	17.500	6178508	

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring trunking, type LKV 10075

Type	Colour	Dimension		Pack. m	Weight		Item No.
		Length mm	W x H mm		m	kg/100 m	
LKV 10075	Stone grey	2000	75x100	16	96.000	6178338	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight		Item No.
					m	kg/100 m	
LKV D 75	Stone grey	75	2000	12	23.000	6178510	

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring duct, type LKV 100100

Type	Colour	Dimension		Pack. m	Weight		Item No.
		Length mm	W x H mm		m	kg/100 m	
LKV 100100	Stone grey	2000	100x100	8	116.500	6178341	

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight		Item No.
					m	kg/100 m	
LKV D 100	Stone grey	100	2000	12	34.500	6178512	

PVC Polyvinylchloride


Trunking cover for replacement requirements.



VK wiring duct



Wiring trunking, type LKV N 75025





Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75025	Stone grey	2000	25x75	40	49.500	6178420

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 25	Stone grey	25	2000	36	9.500	6178504

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75037




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75037	Stone grey	2000	37,5x75	32	60.500	6178422

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 37	Stone grey	37.5	2000	24	15.000	6178506

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75050





Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75050	Stone grey	2000	50x75	24	72.500	6178424

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover



Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 50	Stone grey	50	2000	24	17.500	6178508

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75075

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75075	Stone grey	2000	75x75	16	84.500	6178426

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.





Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV N 75100

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75100	Stone grey	2000	100x75	16	112.000	6178428

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.




Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wiring trunking, type LKV N 75125

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 75125	Stone grey	2000	125x75	8	138.500	6178430

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.




Cover


Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.

PVC Polyvinylchloride

Trunking cover for replacement requirements.



Wiring trunking, type LKV N 10037




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 10037	Stone grey	2000	37,5x100	32	73.000	6178435

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 37	Stone grey	37.5	2000	24	15.000	6178506

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 10050




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 10050	Stone grey	2000	50x100	24	83.000	6178437

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover





Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 50	Stone grey	50	2000	24	17.500	6178508

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 10075





Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKV N 10075	Stone grey	2000	75x100	16	102.000	6178439

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover



Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Dimension a mm	Length mm			
LKV D 75	Stone grey	75	2000	12	23.000	6178510

PVC Polyvinylchloride


Trunking cover for replacement requirements.

Wiring duct, type LKV N 100100

Type	Colour	Length mm	Dimension W x H mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV N 100100	Stone grey	2000	100x100	8	122.500	6178441

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.




Cover


Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKV D 100	Stone grey	100	2000	12	34.500	6178512

PVC Polyvinylchloride

Trunking cover for replacement requirements.




Wire retainer for type LK4 and LK4/N



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LK4 H	Stone grey	56	25	100	0.348	6178092
PS Polystyrene						

Wire retainer for wiring trunking, type LK4 and LK4/N. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.


Wire retainer for type LKV and LKV/N



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKV H	Stone grey	56	25	100	0.343	6178349
PS Polystyrene						

Wire retainer for wiring trunking, type LKV and LKV/N. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.


Plastic rivet tool



Type	Dimension	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW1	Ø 4,5mm	Black	1	9.300	6178527
POM Polyacetal (polyoxymethylene, polyformaldehyde)					

Riveting tool for installing body-bound rivets 4.5 mm.


Plastic rivet tool



Type	Dimension	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW2	Ø 6mm	Black	1	9.400	6178529
POM Polyacetal (polyoxymethylene, polyformaldehyde)					

Riveting tool for mounting spreading rivets 6 mm.


Spreading rivet, KSN 1



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN1	Light grey	100	0.026	6178520
PP Polypropylene				

The riveting tool KNW1 should be used for rapid mounting and for the optimum function.

Body-bound rivet, KSN 22



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN22	Light grey	100	0.070	6178525
PA Polyamide				

The riveting tool KNW2 should be used for rapid mounting and for the optimum function. Dimension of the drill hole: 6.5 mm.

Release pliers

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AKZ	1	30.857	6178535

St Steel

To notch the bars down to the trunking base.




Spacer

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
AH1	Grey	12	100	0.354	6178540
AH2	Grey	20	100	0.577	6178542

PVC Polyvinylchloride

Stackable spacer for height compensation between the different component heights.




Washer

Type	Colour	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ULS	Grey	3	100	0.170	6178548

PVC Polyvinylchloride

Washer as compensation for different heights.





Support rail

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP 2M	Unperforated	1.5	2000	20	70.000	1115057

St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).




Support rail

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP L 2M	Perforated	1.5	2000	20	69.000	1115065

St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).




Hat profile rail, unperforated

Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Unperforated	1	2000	50	36.040	1115650


St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).



Hat profile rail, perforated




Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Perforated	1	2000	50	33.280	1115669

St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Identification plate, intrinsically safe circuits



Type	Dimension mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VK ISCS 5012	99x25mm	Light blue	20	0.100	6178643

Sticker as an identification plate to attach onto wiring trunking in switching cabinets with self-protected power circuits.







05_LFS_Produnkteilheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpert_02233) / 2018/10/15 10:55:22 10:55:22

VKH wiring trunking, halogen-free



LKVH DIN wiring trunking, halogen-free


136



Accessories, VK wiring trunking, halogen-free

139

Wiring trunking, type LKV H 50037




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKVH 50037	Light grey	2000	37,5 x 50	48	32.000	6178582	

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKVH D 37	Light grey	37.5	2000	24	8.500	6178670

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Wiring trunking, type LKV H 50050




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKVH 50050	Light grey	2000	50x50	36	37.000	6178585	

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover




Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKVH D 50	Light grey	50	2000	24	11.000	6178674

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Wiring trunking, type LKV H 50075




Type	Colour	Length mm	Dimension		Pack. Weight		Item No.
			W x H mm	m	kg/100 m		
LKVH 50075	Light grey	2000	75x50	24	52.000	6178588	

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover



Type	Colour	Dimension a mm	Length mm	Pack. Weight		Item No.
				m	kg/100 m	
LKVH D 75	Light grey	75	2000	12	18.000	6178678

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Trunking cover for replacement requirements.

Wiring trunking, type LKV H 75037

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKVH N 75037	Light grey	2000	37,5 x 75	32	44.000	6178552

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.




Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LKVH D 37	Light grey	2000	37.5	24	8.500	6178670

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.




Wiring trunking, type LKV H 75050

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKVH N 75050	Light grey	2000	50x75	24	51.000	6178556

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.




Cover

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LKVH D 50	Light grey	2000	50	24	11.000	6178674

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.





Wiring trunking, type LKV H 75075

Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKVH N 75075	Light grey	2000	75x75	16	64.000	6178559

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.




Cover


Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LKVH D 75	Light grey	2000	75	12	18.000	6178678

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.



Wiring trunking, type LKV H 75100




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKVH N 75100	Light grey	2000	100x75	16	84.000	6178563

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LKVH D 100	Light grey	2000	100	12	27.500	6178662

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Wiring trunking, type LKV H 75125




Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	W x H mm			
LKVH N 75125	Light grey	2000	125x75	8	98.500	6178566

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover



Type	Colour	Dimension		Pack. m	Weight kg/100 m	Item No.
		Length mm	Dimension a mm			
LKVH D 125	Light grey	2000	125	16	34.500	6178666

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Trunking cover for replacement requirements.

Wire retainer for type LKV/H

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LKV H H	Light grey	56	25	100	0.349	6178650

PS Polystyrene

Wire retainer for halogen-free wiring trunking, type LKV/H. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.




Plastic rivet tool

Type	Dimension	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW1	Ø 4,5mm	Black	1	9.300	6178527

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for installing body-bound rivets 4.5 mm.




Plastic rivet tool

Type	Dimension	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW2	Ø 6mm	Black	1	9.400	6178529

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for mounting spreading rivets 6 mm.




Spreading rivet, KSN 1

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN1	Light grey	100	0.026	6178520

PP Polypropylene

The riveting tool KNW1 should be used for rapid mounting and for the optimum function.




Body-bound rivet, KSN 22

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN22	Light grey	100	0.070	6178525

PA Polyamide

The riveting tool KNW2 should be used for rapid mounting and for the optimum function. Dimension of the drill hole: 6.5 mm.



Release pliers


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AKZ	1	30.857	6178535

St Steel

To notch the bars down to the trunking base.



Support rail




Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP 2M	Unperforated	1.5	2000	20	70.000	1115057

St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Support rail




Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP L 2M	Perforated	1.5	2000	20	69.000	1115065

St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Hat profile rail, unperforated




Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Unperforated	1	2000	50	36.040	1115650

St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Hat profile rail, perforated



Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP L	Perforated	1	2000	50	33.280	1115669

St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).





05_LFS_Produnkteinheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpport_02233) / 2018/10/15 10:55:22 10:55:22




Rapid 45-2 plastic device installation trunking systems

	Device installation trunking, 1-compartment, trunking width 100 mm	144
	Device installation trunking, 2-compartment, trunking width 130 mm	147
	Device installation trunking, 2-compartment, trunking width 165 mm	150



Trunking height 53 mm, trunking width 100 mm

Device installation trunking Rapid 45-2, type GK-53100




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GK-53100RW	Pure white	2000	12	130.300	6113000
GK-53100LGR	Light grey	2000	12	130.300	6113002

PC/PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.

Trunking connector and joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-KS45-1RW	Pure white	6	0.861	6113020
GK-KS45-1LGR	Light grey	6	0.861	6113022

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Flat angle




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-FS53100RW	Pure white	1	34.600	6113080
GK-FS53100LGR	Light grey	1	34.600	6113082

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.

Flat angle cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-FH53100RW	Pure white	2	10.911	6113090
GK-FH53100LGR	Light grey	2	10.911	6113092

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IS53100RW	Pure white	1	34.200	6113060
GK-IS53100LGR	Light grey	1	34.200	6113062

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner cover



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH53100RW	Pure white	1	12.856	6113070
GK-IH53100LGR	Light grey	1	12.856	6113072

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Internal corner for changing the direction of Rapid 45 device installation trunking.

External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AS53100RW	Pure white	1	40.400	6113040
GK-AS53100LGR	Light grey	1	40.400	6113042

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

90° fixed external corner for changing the direction of Rapid 45-2 device installation trunking.




External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53100RW	Pure white	1	7.153	6113050
GK-AH53100LGR	Light grey	1	7.153	6113052

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.




T piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53100RW	Pure white	1	3.405	6113100
GK-TR53100LGR	Light grey	1	3.405	6113102

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece to create a 90° -junction of the system size 53100 on the system size 53100th




T piece adapter on auf WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1RW	Pure white	1	3.002	6113310
GK-TA WDK 1LGR	Light grey	1	2.940	6113312

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53100RW	Pure white	1	2.493	6113110
GK-E53100LGR	Light grey	1	2.493	6113112

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for lateral closing the device installation trunking, Rapid 45-2 GK and GA 53100.




Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OT45RW	Pure white	2000	24	20.550	6113010
GK-OT45LGR	Light grey	2000	24	20.550	6113012


PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.



Trunking height 53 mm, trunking width 100 mm

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-OTSA45RW	Pure white	6	0.624	6113030
GK-OTSA45LGR	Light grey	6	0.624	6113032

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition



Type	Length mm	Pack. Weight		Item No.
		m	kg/100 m	
GK-TW53	2000	40	28.700	6113290

PVC Polyvinylchloride


Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Device installation trunking Rapid 45-2, Type GK-53130

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-53130RW	Pure white	2000	8	174.000	6113200
GK-53130LGR	Light grey	2000	8	174.000	6113202

PC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.



Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-2RW	Pure white	6	0.707	6113210
GK-KS45-2LGR	Light grey	6	0.707	6113212

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 130 mm.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FS53130RW	Pure white	1	60.200	6113260
GK-FS53130LGR	Light grey	1	60.200	6113262

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.




Flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53130RW	Pure white	2	14.754	6113270
GK-FH53130LGR	Light grey	2	14.754	6113272

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.




Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IS53130RW	Pure white	1	44.400	6113240
GK-IS53130LGR	Light grey	1	44.400	6113242

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.




Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53130RW	Pure white	1	14.730	6113250
GK-IH53130LGR	Light grey	1	14.730	6113252


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.



Trunking height 53 mm, trunking width 130 mm

External corner




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-AS53130RW	Pure white	1	56.200		6113220
GK-AS53130LGR	Light grey	1	56.200		6113222

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking.

External corner cover




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-AH53130RW	Pure white	1	8.440		6113230
GK-AH53130LGR	Light grey	1	8.440		6113232

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.

T piece adapter




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-TR53130RW	Pure white	1	3.514		6113300
GK-TR53130LGR	Light grey	1	3.514		6113302

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53130 on the system size 53130.

T piece adapter on auf WDK 40060




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-TA WDK 2RW	Pure white	1	2.717		6113320
GK-TA WDK 2LGR	Light grey	1	2.670		6113322

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53130 to a cable trunking WDK40060.

End piece




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-E53130RW	Pure white	1	2.972		6113280
GK-E53130LGR	Light grey	1	2.972		6113282

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53130 device installation trunking.

Cover



Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	m	
GK-OT45RW	Pure white	2000	24	20.550		6113010
GK-OT45LGR	Light grey	2000	24	20.550		6113012

PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.




Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45RW	Pure white	6	0.624	6113030
GK-OTSA45LGR	Light grey	6	0.624	6113032

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

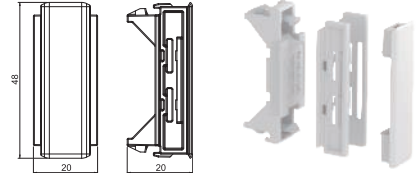


Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	6113290


PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.



Trunking height 53 mm, trunking width 165 mm

Device installation trunking Rapid 45-2, Type GK-53165



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GK-53165RW	Pure white	2000	8	216.250	6113400
GK-53165LGR	Light grey	2000	8	216.250	6113402

PC/PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.

Trunking connector and joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-KS45-1RW	Pure white	6	0.861	6113020
GK-KS45-1LGR	Light grey	6	0.861	6113022

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Flat angle




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-FS53165RW	Pure white	1	64.500	6113450
GK-FS53165LGR	Light grey	1	64.500	6113452

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.

Flat angle cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-FH53165RW	Pure white	2	16.300	6113460
GK-FH53165LGR	Light grey	2	16.300	6113462

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IS53165RW	Pure white	1	54.500	6113430
GK-IS53165LGR	Light grey	1	54.500	6113432

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner cover



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH53165RW	Pure white	1	15.634	6113440
GK-IH53165LGR	Light grey	1	15.634	6113442

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Internal corner for changing the direction of Rapid 45 device installation trunking.

External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AS53165RW	Pure white	1	66.800	6113410
GK-AS53165LGR	Light grey	1	66.800	6113412

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking.




External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53165RW	Pure white	1	9.230	6113420
GK-AH53165LGR	Light grey	1	9.230	6113422

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.




T-piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53165RW	Pure white	1	4.545	6113480
GK-TR53165LGR	Light grey	1	4.515	6113482

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53165 on the system size 53165.




T piece adapter on auf WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1RW	Pure white	1	3.002	6113310
GK-TA WDK 1LGR	Light grey	1	2.940	6113312

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53165RW	Pure white	1	3.561	6113470
GK-E53165LGR	Light grey	1	3.561	6113472

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53165 device installation trunking.




Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OT45RW	Pure white	2000	24	20.550	6113010
GK-OT45LGR	Light grey	2000	24	20.550	6113012


PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.



Trunking height 53 mm, trunking width 165 mm

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-OTSA45RW	Pure white	6	0.624	6113030
GK-OTSA45LGR	Light grey	6	0.624	6113032

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition



Type	Length mm	Pack. Weight		Item No.
		m	kg/100 m	
GK-TW53	2000	40	28.700	6113290

PVC Polyvinylchloride


Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Rapid 45 device installation trunking, type GEK-K 53160-3

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GEK-K53160-3	Pure white	2000	8	210.000	6116073

PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.




Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KS45-3	Pure white	6	1.324	6116163

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.




Joint cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KSOT45	Pure white	—	6	0.284	6116152

PVC Polyvinylchloride

Joint cover for the covers of the Rapid 45 device installation trunking to hide cut edges and provide tidy connection to installed Modul 45 devices.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KF53160-3	Pure white	1	64.000	6116493

PVC Polyvinylchloride

Flat angle for direction change of Rapid 45 device installation trunking, GEK-K53160-3.




Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KI53160-3	Pure white	2	13.800	6116201

PVC Polyvinylchloride

Internal corner as hood fitting for direction change of three-compartment Rapid 45 device installation trunking. The fittings can be variably adjusted between 80 and 103°.




Internal corner


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-KIS53160-3	Pure white	1	48.100	6116203

PVC Polyvinylchloride

Rigid 90° internal corner for changing the direction of the Rapid 45 three-compartment device installation trunking.



External corner cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GEK-KA53160-3	Pure white	2	22.000	6116261

PVC Polyvinylchloride

External corner as hood fitting for direction change of three-compartment Rapid 45 device installation trunking. The fittings can be adjusted variably between 70–130°.

External corner




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GEK-KAS53160-3	Pure white	1	64.000	6116263

PVC Polyvinylchloride

Rigid 90° external corner for changing the direction of the Rapid 45 three-compartment device installation trunking.

T piece




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GEK-KT53160-3	Pure white	1	72.000	6116193

PVC Polyvinylchloride

Prefabricated T piece for vertical branch of the Rapid 45 device installation trunking, three-compartment.

End piece




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GEK-KE53160-3	Pure white	8	3.687	6116403

PVC Polyvinylchloride

End piece for closing the device installation trunking Rapid 45 GEK-K53160-3.

Cover




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GEK-KOT45	Pure white	2000	24	18.600	6116108

PVC Polyvinylchloride

Trunking cover for closing the Rapid 45 device installation trunking.

Cover clip



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
OK-K 45	—	10	0.490	6116116

V2A Stainless steel, grade 304


Cover clip for better and easier cable routing in the Rapid 45 device installation trunking.

Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.





05_LFS_Produnkteilheitenkatalog_EX_20_8 / en / 2018/10/15 10:52:37 (LFS-report_02233) / 2018/10/15 10:55:22 10:55:22




Rapid 45-2 aluminium device installation trunking systems

	Device installation trunking, 1-compartment, trunking width 100 mm	158
	Device installation trunking, 2-compartment, trunking width 130 mm	161
	Device installation trunking, 2-compartment, trunking width 165 mm	164



Trunking height 53 mm, trunking width 100 mm

Device installation trunking Rapid 45-2, Type GA-53100



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GA-53100EL	—	2000	8	223.800	6112403
GA-53100RW	Pure white	2000	8	223.800	6112400

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.

Trunking connector and joint cover




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1RW	Pure white	6	0.861	6113020

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Flat angle




Type	Colour	Surface finish	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
GA-FS53100EL	—	Anodised	1	69.200	6112443
GA-FS53100RW	Pure white	—	1	69.200	6112440

Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Flat angle cover





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53100RW	Pure white	2	10.911	6113090

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner




Type	Colour	Surface finish	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
GA-IS53100EL	—	Anodised	1	69.200	6112433
GA-IS53100RW	Pure white	—	1	69.200	6112430

Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

Internal corner cover



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53100RW	Pure white	1	12.856	6113070

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.


External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53100EL	—	Anodised	1	84.100	6112423
GA-AS53100RW	Pure white	—	1	84.100	6112420

Alu Aluminium

EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...





External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53100AL	Aluminium	1	6.900	6113054
GK-AH53100RW	Pure white	1	7.153	6113050

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.




T piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53100AL	Aluminium	1	3.405	6113104
GK-TR53100RW	Pure white	1	3.405	6113100

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece to create a 90° -junction of the system size 53100 on the system size 53100th





T piece adapter on auf WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1AL	Aluminium	1	3.002	6113314
GK-TA WDK 1RW	Pure white	1	3.002	6113310

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53100AL	Aluminium	1	2.200	6113114
GK-E53100RW	Pure white	1	2.493	6113110

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for lateral closing the device installation trunking, Rapid 45-2 GK and GA 53100.




Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	6112413
GA-OT45RW	Pure white	—	2000	20	47.450	6112410

Alu Aluminium


EL Anodised

Cover for closing the device installation trunking of the series Rapid 45-2 GA The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.



Trunking height 53 mm, trunking width 100 mm

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-OTSA45AL	Aluminium	1	0.550	6113034
GK-OTSA45RW	Pure white	6	0.624	6113030

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition




Type	Length mm	Pack. Weight		Item No.
		m	kg/100 m	
GK-TW53	2000	40	28.700	6113290

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking Rapid 45-2, Type GA-53130

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-53130EL	—	Anodised	2000	6	326.500	6112503
GA-53130RW	Pure white	—	2000	6	326.500	6112500

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.



Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-2AL	Aluminium	1	0.450	6113214
GK-KS45-1RW	Pure white	6	0.861	6113020

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 130 mm.




Flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-FS53130EL	—	Anodised	1	119.900	6112533
GA-FS53130RW	Pure white	—	1	119.900	6112530

Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.




Flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53130AL	Aluminium	2	12.700	6113274
GK-FH53130RW	Pure white	2	14.754	6113270

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.





Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-IS53130EL	—	Anodised	1	89.200	6112523
GA-IS53130RW	Pure white	—	1	89.200	6112520

Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...




Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53130AL	Aluminium	1	13.170	6113254
GK-IH53130RW	Pure white	1	14.730	6113250



PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.



Trunking height 53 mm, trunking width 130 mm

External corner




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53130EL	—	2000	1	117.700	6112513
GA-AS53130RW	Pure white	2000	1	117.700	6112510

Alu Aluminium

EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

External corner cover




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53130AL	Aluminium	1	8.000	6113234
GK-AH53130RW	Pure white	1	8.440	6113230

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.

T piece adapter




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53130AL	Aluminium	1	3.514	6113304
GK-TR53130RW	Pure white	1	3.514	6113300

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53130 on the system size 53130.

T piece adapter on auf WDK 40060




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 2AL	Aluminium	1	2.200	6113324
GK-TA WDK 2RW	Pure white	1	2.717	6113320

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53130 to a cable trunking WDK40060.

End piece




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53130AL	Aluminium	1	2.700	6113284
GK-E53130RW	Pure white	1	2.972	6113280

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53130 device installation trunking.

Cover



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	6112413
GA-OT45RW	Pure white	—	2000	20	47.450	6112410

Alu Aluminium

EL Anodised


Cover for closing the device installation trunking of the series Rapid 45-2 GA The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.

Joint cover

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
GK-OTSA45AL	Aluminium	1	0.550		6113034
GK-OTSA45RW	Pure white	6	0.624		6113030

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

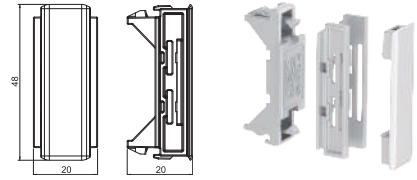


Partition

Type	Length mm	Pack. m	Weight		Item No.
			kg/100 m		
GK-TW53	2000	40	28.700		6113290

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.



Protective conductor connection bracket


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
8AWR	Electrogalvanised	—	—	10	0.610		6288704

St Steel

G Electrogalvanised


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²

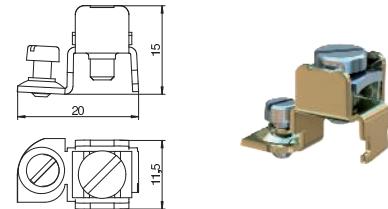

Trunking height 53 mm, trunking width 165 mm

Device installation trunking Rapid 45-2, Type GA-53165



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-53165EL	—	Anodised	2000	6	370.750	6112603
GA-53165RW	Pure white	—	2000	6	370.750	6112600

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.

Trunking connector and joint cover




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1AL	Aluminium	1	0.580	6113024
GK-KS45-1RW	Pure white	6	0.861	6113020

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Flat angle




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-FS53165EL	—	Anodised	1	121.900	6112633
GA-FS53165RW	Pure white	—	1	121.900	6112630

Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Flat angle cover




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53165AL	Aluminium	2	16.300	6113464
GK-FH53165RW	Pure white	2	16.300	6113460

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-IS53165EL	—	Anodised	1	100.100	6112623
GA-IS53165RW	Pure white	—	1	100.100	6112620

Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

Internal corner cover



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53165AL	Aluminium	1	14.660	6113444
GK-IH53165RW	Pure white	1	15.634	6113440

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Internal corner for changing the direction of Rapid 45 device installation trunking.

External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53165EL	—	Anodised	1	114.200	6112613
GA-AS53165RW	Pure white	—	1	114.200	6112610

Alu Aluminium
EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...



External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53165AL	Aluminium	1	9.230	6113424
GK-AH53165RW	Pure white	1	9.230	6113420

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.




T-piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53165AL	Aluminium	1	4.040	6113484
GK-TR53165RW	Pure white	1	4.545	6113480

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53165 on the system size 53165.





T piece adapter on auf WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1AL	Aluminium	1	3.002	6113314
GK-TA WDK 1RW	Pure white	1	3.002	6113310

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53165AL	Aluminium	1	3.240	6113474
GK-E53165RW	Pure white	1	3.561	6113470

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53165 device installation trunking.




Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	6112413
GA-OT45RW	Pure white	—	2000	20	47.450	6112410


Alu Aluminium
EL Anodised

Cover for closing the device installation trunking of the series Rapid 45-2 GA The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.



Trunking height 53 mm, trunking width 165 mm

Joint cover




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-OTSA45AL	Aluminium	1	0.550	6113034
GK-OTSA45RW	Pure white	6	0.624	6113030

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition




Type	Length mm	Pack. Weight		Item No.
		m	kg/100 m	
GK-TW53	2000	40	28.700	6113290

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²






Rapid 80 plastic device installation trunking systems

	Device installation trunking, 1-compartment, trunking width 110 mm	170
	Device installation trunking, 1-compartment, trunking width 130 mm	174
	Device installation trunking, 1-compartment, trunking width 170 mm	178



Trunking height 70 mm, trunking width 110 mm

Device installation trunking, type GK70110




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70110RW	Pure white	2000	8	132.000	6274300
GK-70110CW	Cream	2000	8	132.000	6274301
GK-70110LGR	Light grey	2000	8	132.000	6274302
GK-70110GR	Stone grey	2000	8	132.000	6274306

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.

Coupling




Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Accessory mounting box, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Strain relief for service outlet




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Plastic trunking cover, smooth



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6278680
GK-OTGCW	Cream	2000	16	27.500	6278681
GK-OTGLGR	Light grey	2000	16	27.500	6278682
GK-OTGGR	Stone grey	2000	16	27.500	6278686

PVC Polyvinylchloride


Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2000	16	27.000	6278780
GK-OTKCW	Cream	2000	16	27.000	6278781
GK-OTKLGR	Light grey	2000	16	27.000	6278782

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.




External corner cover, variable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70110RW	Pure white	130.5	1	15.000	6274210
GK-AH70110CW	Cream	130.5	1	15.000	6274211
GK-AH70110LGR	Light grey	130.5	1	15.000	6274212

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70110RW	Pure white	1	116.000	6274310
GK-A70110CW	Cream	1	116.000	6274311
GK-A70110LGR	Light grey	1	116.000	6274312
GK-A70110GR	Stone grey	1	116.000	6274316

PVC Polyvinylchloride

External corner for changing the direction of the GK device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
GK-OTGACW	Cream	2	9.500	6274791
GK-OTGALGR	Light grey	2	9.500	6274792
GK-OTGAGR	Stone grey	2	9.500	6274796

PVC Polyvinylchloride

PVC external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70110RW	Pure white	152.5	1	15.100	6274220
GK-FH70110CW	Cream	152.5	1	15.100	6274221
GK-FH70110LGR	Light grey	152.5	1	15.100	6274222

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70110RW	Pure white	1	78.000	6274320
GK-F70110CW	Cream	1	78.000	6274321
GK-F70110LGR	Light grey	1	78.000	6274322
GK-F70110GR	Stone grey	1	78.000	6274326


PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.



Trunking height 70 mm, trunking width 110 mm

Flat angle cover, smooth




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490
GK-OTGFCW	Cream	1	17.000	6274491
GK-OTGFLGR	Light grey	1	17.000	6274492
GK-OTGFGR	Stone grey	1	17.000	6274496

PVC Polyvinylchloride

Flat angle cover, smooth surface.

Internal corner cover, variable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70110RW	Pure white	1	14.200	6274240
GK-IH70110CW	Cream	1	14.200	6274241
GK-IH70110LGR	Light grey	1	14.200	6274282

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70110RW	Pure white	1	100.000	6274340
GK-I70110CW	Cream	1	100.000	6274341
GK-I70110LGR	Light grey	1	100.000	6274342
GK-I70110GR	Stone grey	1	100.000	6274346

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.

T-piece




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70110RW	Pure white	1	100.000	6274360
GK-T70110CW	Cream	1	100.000	6274361
GK-T70110LGR	Light grey	1	100.000	6274362
GK-T70110GR	Stone grey	1	100.000	6274366

PVC Polyvinylchloride

T-piece for changing the direction of the GK device installation trunking.

End piece




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70110RW	Pure white	1	5.009	6274370
GK-E70110CW	Cream	1	5.009	6274371
GK-E70110LGR	Light grey	1	5.009	6274372
GK-E70110GR	Stone grey	1	5.009	6274376

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.

Partition



Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	6274900

PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

Duct clamp

Type	Surface		Length mm	Colour	Pack. pcs	Weight		Item No.
	finish					kg/100	pcs.	
KL80A	—	—		Light grey	20	0.685		6288640


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Trunking height 70 mm, trunking width 130 mm

Device installation trunking, type GK70130




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70130RW	Pure white	2000	8	152.000	6274500
GK-70130CW	Cream	2000	8	152.000	6274501
GK-70130LGR	Light grey	2000	8	152.000	6274502
GK-70130GR	Stone grey	2000	8	152.000	6274506

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.

Coupling




Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Accessory mounting box, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, British Standard, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDBS1	—	10	3.300	6288585

PA Polyamide

Front-locking, single accessory mounting box for British Standard switch systems. Insertion opening for cable diameters of up to max. 17 mm. Can be used in all device installation trunking of the Rapid 80 series and ISS service poles with 76.5 mm system opening.

Accessory mounting box, British Standard, double



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDBS2	—	10	5.300	6288586

PA Polyamide


Front-locking, double accessory mounting box for British Standard switch systems. Insertion opening for cable diameters of up to max. 17 mm. Can be used in all device installation trunking of the Rapid 80 series and ISS service poles with 76.5 mm system opening.

Strain relief for service outlet

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs	Item No.
7ZE			50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...




Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6278680
GK-OTGCW	Cream	2000	16	27.500	6278681
GK-OTGLGR	Light grey	2000	16	27.500	6278682
GK-OTGGR	Stone grey	2000	16	27.500	6278686

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2000	16	27.000	6278780
GK-OTKCW	Cream	2000	16	27.000	6278781
GK-OTKLGR	Light grey	2000	16	27.000	6278782

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.




External corner cover, variable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs	Item No.
GK-AH70130RW	Pure white	130.5	1	18.535	6274410
GK-AH70130CW	Cream	130.5	1	16.100	6274411
GK-AH70130LGR	Light grey	130.5	1	16.100	6274412

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs	Item No.
GK-A70130RW	Pure white	1	127.000	6274510
GK-A70130CW	Cream	1	127.000	6274511
GK-A70130LGR	Light grey	1	127.000	6274512
GK-A70130GR	Stone grey	1	127.000	6274516

PVC Polyvinylchloride

External corner for changing the direction of the GK device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
GK-OTGACW	Cream	2	9.500	6274791
GK-OTGALGR	Light grey	2	9.500	6274792
GK-OTGAGR	Stone grey	2	9.500	6274796


PVC Polyvinylchloride

PVC external corner cover, smooth surface.



Trunking height 70 mm, trunking width 130 mm

Flat angle cover




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	6274420
GK-FH70130CW	Cream	172.5	1	17.100	6274421
GK-FH70130LGR	Light grey	172.5	1	17.100	6274422

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.

Flat angle




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70130RW	Pure white	1	83.000	6274520
GK-F70130CW	Cream	1	83.000	6274521
GK-F70130LGR	Light grey	1	83.000	6274522
GK-F70130GR	Stone grey	1	83.000	6274526

PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.

Flat angle cover, smooth




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490
GK-OTGFCW	Cream	1	17.000	6274491
GK-OTGFLGR	Light grey	1	17.000	6274492
GK-OTGFGR	Stone grey	1	17.000	6274496

PVC Polyvinylchloride

Flat angle cover, smooth surface.

Internal corner cover, variable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70130RW	Pure white	1	14.900	6274440
GK-IH70130CW	Cream	1	14.900	6274441
GK-IH70130LGR	Light grey	1	14.900	6274442

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70130RW	Pure white	1	110.000	6274540
GK-I70130CW	Cream	1	110.000	6274541
GK-I70130LGR	Light grey	1	110.000	6274542
GK-I70130GR	Stone grey	1	110.000	6274546

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.

T-piece



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70130RW	Pure white	1	108.000	6274560
GK-T70130CW	Cream	1	108.000	6274561
GK-T70130LGR	Light grey	1	108.000	6274562
GK-T70130GR	Stone grey	1	108.000	6274566


PVC Polyvinylchloride

T-piece for changing the direction of the GK device installation trunking.

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70130RW	—	—	Pure white	1	5.574	6274570
GK-E70130CW	—	—	Cream	1	5.621	6274571
GK-E70130LGR	—	—	Light grey	1	5.621	6274572
GK-E70130GR	—	—	Stone grey	1	5.621	6274576

PVC Polyvinylchloride


End piece for closing the GK device installation trunking.

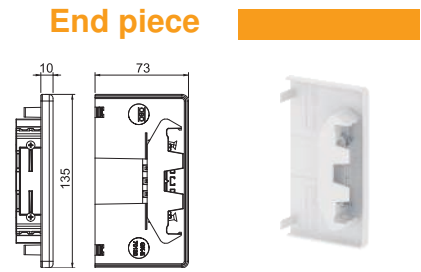

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	6274900

PVC Polyvinylchloride


Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

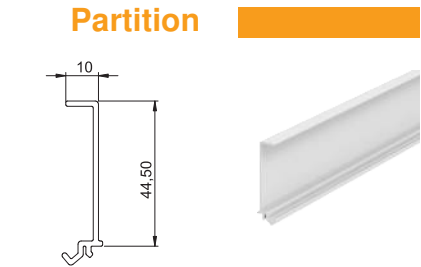

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

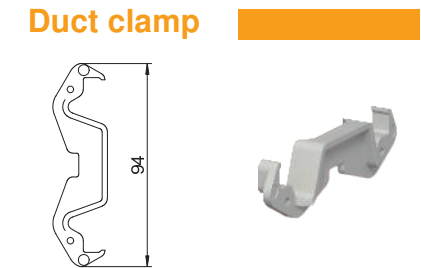

Trunking height 70 mm, trunking width 170 mm

Device installation trunking, type GK70170




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70170RW	Pure white	2000	8	180.000	6274700
GK-70170CW	Cream	2000	8	180.000	6274701
GK-70170LGR	Light grey	2000	8	180.000	6274702
GK-70170GR	Stone grey	2000	8	180.000	6274706

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.

Coupling




Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Accessory mounting box, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Strain relief for service outlet




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Plastic trunking cover, smooth



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6278680
GK-OTGCW	Cream	2000	16	27.500	6278681
GK-OTGLGR	Light grey	2000	16	27.500	6278682
GK-OTGGR	Stone grey	2000	16	27.500	6278686

PVC Polyvinylchloride


Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2000	16	27.000	6278780
GK-OTKCW	Cream	2000	16	27.000	6278781
GK-OTKLGR	Light grey	2000	16	27.000	6278782

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.




External corner cover, variable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70170RW	Pure white	130.5	1	20.490	6274610
GK-AH70170CW	Cream	130.5	1	20.490	6274611
GK-AH70170LGR	Light grey	130.5	1	20.490	6274612

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70170RW	Pure white	1	149.000	6274710
GK-A70170CW	Cream	1	149.000	6274711
GK-A70170LGR	Light grey	1	149.000	6274712
GK-A70170GR	Stone grey	1	149.000	6274716

PVC Polyvinylchloride

External corner for changing the direction of the GK device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
GK-OTGACW	Cream	2	9.500	6274791
GK-OTGALGR	Light grey	2	9.500	6274792
GK-OTGAGR	Stone grey	2	9.500	6274796

PVC Polyvinylchloride

PVC external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70170RW	Pure white	212.5	1	19.131	6274620
GK-FH70170CW	Cream	212.5	1	19.131	6274621
GK-FH70170LGR	Light grey	212.5	1	19.131	6274622

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70170RW	Pure white	1	91.000	6274720
GK-F70170CW	Cream	1	91.000	6274721
GK-F70170LGR	Light grey	1	91.000	6274722
GK-F70170GR	Stone grey	1	91.000	6274726


PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.



Trunking height 70 mm, trunking width 170 mm

Flat angle cover, smooth




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	1	17.000	6274490
GK-OTGFCW	Cream	1	17.000	6274491
GK-OTGFLGR	Light grey	1	17.000	6274492
GK-OTGFGR	Stone grey	1	17.000	6274496

PVC Polyvinylchloride

Flat angle cover, smooth surface.

Internal corner cover, trunking height 70 mm




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-IH70170RW	Pure white	1	16.300	6274640
GK-IH70170CW	Cream	1	16.300	6274641
GK-IH70170LGR	Light grey	1	16.300	6274642

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-I70170RW	Pure white	1	130.000	6274740
GK-I70170CW	Cream	1	130.000	6274741
GK-I70170LGR	Light grey	1	130.000	6274742
GK-I70170GR	Stone grey	1	130.000	6274746

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.

T-piece




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-T70170RW	Pure white	1	120.000	6274760
GK-T70170CW	Cream	1	120.000	6274761
GK-T70170LGR	Light grey	1	120.000	6274762
GK-T70170GR	Stone grey	1	120.000	6274766

PVC Polyvinylchloride

T-piece for changing the direction of the GK device installation trunking.

End piece




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
GK-E70170RW	Pure white	1	6.840	6274770
GK-E70170CW	Cream	1	6.840	6274771
GK-E70170LGR	Light grey	1	6.840	6274772
GK-E70170GR	Stone grey	1	6.840	6274776

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.

Partition



Type	Length mm	Pack.	Weight	Item No.
		m	kg/100 m	
GK-TW70	2000	40	17.400	6274900

PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

Duct clamp

Type	Surface		Length mm	Colour	Pack. pcs	Weight		Item No.
	finish					kg/100	pcs.	
KL80A	—	—		Light grey	20	0.685		6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.








Rapid 80 plastic device installation trunking systems, halogen-free

	Device installation trunking, 1-compartment, trunking width 130 mm	184
	Device installation trunking, 1-compartment, trunking width 170 mm	187



Trunking height 70 mm, trunking width 130 mm, halogen-free

Device installation trunking, type GKH70130




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GKH-70130RW	Pure white	2000	8	121.000	6114200

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

GKH device installation trunking made of halogen-free PC/ABS, suitable for direct wall mounting or on wall brackets. Fastening takes place using the perforation in the trunking. The GKH device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side.

Coupling




Type	Colour	Pack. Weight		Item No.
		PU	kg/100 PUs	
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Accessory mounting box, single




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Strain relief for service outlet




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .

Trunking cover, smooth



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GKH-OTGRW	Pure white	2000	16	22.000	6114210

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Smooth trunking cover made of halogen-free PC/ABS, for closing device installation trunking with 80 mm system opening.

External corner cover, variable

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70130RW	Pure white	130.5	1	18.535	6274410

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-A70130RW	Pure white	1	100.000	6114220

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGARW	Pure white	2	7.500	6114230

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

PC/ABS external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	6274420

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-F70130RW	Pure white	1	66.000	6114240

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.




Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGFRW	Pure white	1	13.000	6114250


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover made of halogen-free PC/ABS.



Trunking height 70 mm, trunking width 130 mm, halogen-free

Internal corner cover, variable




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH70130RW	Pure white	1	14.900	6274440

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-I70130RW	Pure white	1	90.000	6114260

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

T piece




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-T70130RW	Pure white	1	82.000	6114270

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

T piece made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

End piece




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-E70130RW	Pure white	1	5.203	6114280

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece made of halogen-free PC/ABS for closing the GKH device installation trunking.

Partition




Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GKH-TW70	Pure white	2000	40	14.000	6114290

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Partition made of halogen-free PC/ABS for mounting in Rapid 80 GKH (GA) device installation trunking or ISS service poles for installing cables of different voltage levels.

Duct clamp



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene


Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Device installation trunking, type GKH70170

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GKH-70170RW	Pure white	2000	8	151.000	6114300

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

GKH device installation trunking made of halogen-free PC/ABS, suitable for direct wall mounting or on wall brackets. Fastening takes place using the perforation in the trunking. The GKH device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side.




Coupling

Type	Colour	Pack. Weight		Item No.
		PU	kg/100 PUs	
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.




Accessory mounting box, single

Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... .




Trunking cover, smooth

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GKH-OTGRW	Pure white	2000	16	22.000	6114210


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Smooth trunking cover made of halogen-free PC/ABS, for closing device installation trunking with 80 mm system opening.



Trunking height 70 mm, trunking width 170 mm, halogen-free


External corner cover, variable



Type	Colour	Length mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
GK-AH70170RW	Pure white	130.5	1	20.490	6274610
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.


External corner



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-A70170RW	Pure white	1	119.000	6114320
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				

External corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.


External corner cover, smooth



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-OTGARW	Pure white	2	7.500	6114230
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				

PC/ABS external corner cover, smooth surface.


Flat angle cover



Type	Colour	Length mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
GK-FH70170RW	Pure white	212.5	1	19.131	6274620
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.


Flat angle



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-F70170RW	Pure white	1	73.000	6114340
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				

Flat angle made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

Flat angle cover, smooth




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GKH-OTGFRW	Pure white	1	13.000	6114250
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				

Flat angle cover made of halogen-free PC/ABS.

Internal corner cover, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70170RW	Pure white	1	16.300	6274640
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				


Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.



Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-I70170RW	Pure white	1	100.000	6114360
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				


Internal corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.



T-piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-T70170RW	Pure white	1	96.000	6114370
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				


T-piece made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.



End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-E70170RW	Pure white	1	6.144	6114380
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene				


End piece made of halogen-free PC/ABS for closing the GKH device installation trunking.



Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-TW70	Pure white	2000	40	14.000	6114290
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

Partition made of halogen-free PC/ABS for mounting in Rapid 80 GKH (GA) device installation trunking or ISS service poles for installing cables of different voltage levels.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene						









Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.





05...FS_Produnkteilheitenkatalog...2018 / en / 2018/10/15 10:52:37 10:52:37 (LLExplo_C302535)


Rapid 80 sheet steel device installation trunking systems

	Device installation trunking, 1-compartment, trunking width 110 mm	192
	Device installation trunking, 1-compartment, trunking width 130 mm	198
	Device installation trunking, 1-compartment, trunking width 130 mm, asymmetrical	204
	Device installation trunking, 1-compartment, trunking width 170 mm	210
	Device installation trunking, 1-compartment, trunking width 170 mm, asymmetrical	216
	Device installation trunking, 2-compartment, trunking width 170 mm	223
	Device installation trunking, 1-compartment, trunking width 210 mm, asymmetrical	229
	Device installation trunking, 2-compartment, trunking width 210 mm	235
	Desk trunking	241



Trunking height 70 and 90 mm, trunking width 110 mm

Device installation trunking, trunking height 70 mm




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70110RW	Pure white	2000	12	258.000	6277000

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Over-lengths up to 3000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Device installation trunking, trunking height 90 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90110RW	Pure white	2000	10	290.000	6277100

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Over-lengths up to 3000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Coupling, trunking height 90 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Accessory mounting box, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide


Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100	pcs.	
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTGRW	Pure white	2000	16	27.500		6278680

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTKRW	Pure white	2000	16	27.000		6278780


PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking height 70 and 90 mm, trunking width 110 mm


Joint cover, trunking height 70 mm



Type	Colour	Pack. pcs	Item No.
G-SVS70110RW	Pure white	1	6279760
St Steel			

Joint cover to hide sawn trunking joint edges.


Joint cover, trunking height 90 mm



Type	Colour	Pack. pcs	Item No.
G-SVS90110RW	Pure white	1	6279776
St Steel			

Joint cover to hide sawn trunking joint edges.


External corner cover, variable



Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70110RW	Pure white	130.5	1	15.000	6274210
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.


External corner, trunking height 70 mm



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SA70110RW	Pure white	1	172.000	6277010
St Steel				

External corner for changing the direction of the GS device installation trunking.


External corner, trunking height 90 mm



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SA90110RW	Pure white	1	199.000	6277110
St Steel				

External corner for changing the direction of the GS device installation trunking.

Sheet steel external corner cover, 80 mm system opening




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTARW	Pure white	1	21.400	6279870
St Steel				

Cover for closing the external corner of the Rapid 80 GS device installation trunking.

External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
PVC Polyvinylchloride				


PVC external corner cover, smooth surface.



Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70110RW	Pure white	152.5	1	15.100	6274220
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					


Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.



Flat angle, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS70110RW	Pure white	1	127.000	6277020
St Steel				


Flat angle for changing the direction of the GS device installation trunking.



Flat angle, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS90110RW	Pure white	1	143.000	6277120
St Steel				


Flat angle for changing the direction of the GS device installation trunking.



Sheet steel flat angle cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860
St Steel				


Cover for closing the flat angle of the Rapid 80 GS device installation trunking.



Flat angle cover, smooth


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490
PVC Polyvinylchloride				

Flat angle cover, smooth surface.



Trunking height 70 and 90 mm, trunking width 110 mm

Internal corner cover, variable




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH70110RW	Pure white	1	14.200	6274240

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-SI70110RW	Pure white	1	55.000	6277040

St Steel

Internal corner for direct installation on GS device installation trunking.

Internal corner, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-SI90110RW	Pure white	1	72.000	6277140

St Steel

Internal corner for direct installation on GS device installation trunking.

T-piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-ST70110RW	Pure white	1	127.000	6277060

St Steel

T-piece suitable for direct wall mounting.

T-piece, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-ST90110RW	Pure white	1	142.000	6277160

St Steel

T-piece suitable for direct wall mounting.

End piece, trunking height 70 mm



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E70110RW	Pure white	1	9.600	6277070

St Steel

End piece for GS device installation trunking.




End piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs	pcs.	
GS-E90110RW	Pure white	1	12.500		6277170

St Steel

End piece for GS device installation trunking.




Sheet steel partition, trunking height 70 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		kg/100 m	m	
GS-TW70	2000	70	2	58.650		6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking height 90 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		kg/100 m	m	
GS-TW90	2000	90	2	74.400		6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100 pcs	pcs.	
KL80A	—	—	Light grey	20	0.685		6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket


Type	Surface finish	Length		Pack. pcs	Weight		Item No.
		mm	Colour		kg/100 pcs	pcs.	
8AWR	Electrogalvanised	—	—	10	0.610		6288704

St Steel

G Electrogalvanised


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Trunking height 70 and 90 mm, trunking width 130 mm

Device installation trunking, trunking height 70 mm




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70130RW	Pure white	2000	12	289.000	6277200

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Device installation trunking, trunking height 90 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90130RW	Pure white	2000	8	321.000	6277300

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Coupling, trunking height 90 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Accessory mounting box, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide


Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100	pcs.	
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTGRW	Pure white	2000	16	27.500		6278680

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTKRW	Pure white	2000	16	27.000		6278780


PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking height 70 and 90 mm, trunking width 130 mm

Joint cover, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS70130RW	Pure white	1	5.200		6279764

St Steel

Joint cover to hide sawn trunking joint edges.

Joint cover, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS90130RW	Pure white	1	6.000		6279780

St Steel

Joint cover to hide sawn trunking joint edges.

External corner cover, variable




Type	Colour	Length mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.	pcs.	
GK-AH70130RW	Pure white	130.5	1	18.535		6274410

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.

External corner, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-SA70130RW	Pure white	1	193.000		6277210

St Steel

External corner for changing the direction of the GS device installation trunking.

External corner, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-SA90130RW	Pure white	1	221.000		6277310

St Steel

External corner for changing the direction of the GS device installation trunking.

Sheet steel external corner cover, 80 mm system opening



Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OTARW	Pure white	1	21.400		6279870


St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.

External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
PVC Polyvinylchloride				


PVC external corner cover, smooth surface.



Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	6274420
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					


Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.



Flat angle, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS70130RW	Pure white	1	137.000	6277220
St Steel				


Flat angle for changing the direction of the GS device installation trunking.



Flat angle, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS90130RW	Pure white	1	152.000	6277320
St Steel				


Flat angle, rising, for changing the direction of the GS device installation trunking.



Sheet steel flat angle cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860
St Steel				


Cover for closing the flat angle of the Rapid 80 GS device installation trunking.



Flat angle cover, smooth


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490
PVC Polyvinylchloride				

Flat angle cover, smooth surface.



Trunking height 70 and 90 mm, trunking width 130 mm

Internal corner cover, variable




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH70130RW	Pure white	1	14.900	6274440

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-SI70130RW	Pure white	1	57.000	6277240

St Steel

Internal corner for direct installation on GS device installation trunking.

Internal corner, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-SI90130RW	Pure white	1	77.000	6277340

St Steel

Internal corner for direct installation on GS device installation trunking.

T-piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-ST70130RW	Pure white	1	142.000	6277260

St Steel

T-piece suitable for direct wall mounting.

T-piece, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-ST90130RW	Pure white	1	157.000	6277360

St Steel

T-piece suitable for direct wall mounting.

End piece, trunking height 70 mm



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E70130RW	Pure white	1	10.800	6277270

St Steel


End piece for GS device installation trunking.

End piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E90130RW	Pure white	1	13.800	6277370

St Steel

End piece for GS device installation trunking.




Sheet steel partition, trunking height 70 mm

Type	Length		Pack. m	Weight kg/100 m	Item No.
	mm	Suitable for trunking depth			
GS-TW70	2000	70	2	58.650	6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking height 90 mm

Type	Length		Pack. m	Weight kg/100 m	Item No.
	mm	Suitable for trunking depth			
GS-TW90	2000	90	2	74.400	6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket



Type	Surface finish	Length		Pack. pcs	Weight kg/100 pcs.	Item No.
		mm	Colour			
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Trunking height 70 and 90 mm, trunking width 130 mm, asymmetrical

Device installation trunking, trunking height 70 mm




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70130RW	Pure white	2000	12	289.000	6277400

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Device installation trunking, trunking height 90 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90130RW	Pure white	2000	8	321.000	6277500

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Coupling, trunking height 90 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Accessory mounting box, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide


Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100	pcs.	
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	m	
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.



Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	m	
GK-OTGRW	Pure white	2000	16	27.500		6278660

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Joint cover, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
G-SVS70130RW	Pure white	1	5.200		6279764


St Steel

Joint cover to hide sawn trunking joint edges.



Trunking height 70 and 90 mm, trunking width 130 mm, asymmetrical

Joint cover, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS90130RW	Pure white	1	6.000		6279780

St Steel

Joint cover to hide sawn trunking joint edges.

External corner cover, variable




Type	Colour	Length mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.	pcs.	
GK-AH70130RW	Pure white	130.5	1	18.535		6274410

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.

External corner, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-AA70130RW	Pure white	1	193.000		627410

St Steel

External corner for changing the direction of the GS device installation trunking.

External corner, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-AA90130RW	Pure white	1	221.000		6277510

St Steel

External corner for changing the direction of the GS device installation trunking.

Sheet steel external corner cover, 80 mm system opening




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OTARW	Pure white	1	21.400		6279870

St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.

External corner cover, smooth



Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-OTGARW	Pure white	2	9.500		6274790

PVC Polyvinylchloride

PVC external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	6274420

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.




Flat angle, rising, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS70130RW	Pure white	1	137.000	6277420

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.




Flat angle, rising, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS90130RW	Pure white	1	152.000	6277520

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.




Flat angle, falling, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF70130RW	Pure white	1	137.000	6277430

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.




Flat angle, falling, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF90130RW	Pure white	1	152.000	6277530

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.




Sheet steel flat angle cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860


St Steel

Cover for closing the flat angle of the Rapid 80 GS device installation trunking.



Trunking height 70 and 90 mm, trunking width 130 mm, asymmetrical


Flat angle cover, smooth



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-OTGFRW	Pure white	1	17.000	6274490

PVC Polyvinylchloride
Flat angle cover, smooth surface.

Internal corner cover, variable




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GK-IH70130RW	Pure white	1	14.900	6274440

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-AI70130RW	Pure white	1	57.000	6277440

St Steel

Internal corner for direct installation on GS device installation trunking.

Internal corner, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-AI90130RW	Pure white	1	77.000	6277540

St Steel

Internal corner for direct installation on GS device installation trunking.

T-piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-AT70130RW	Pure white	1	142.000	6277460

St Steel

T-piece suitable for direct wall mounting.

T-piece, trunking height 90 mm



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-AT90130RW	Pure white	1	157.000	6277560

St Steel


T-piece suitable for direct wall mounting.

End piece, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			m	kg/100 m	
GS-E70130RW	Pure white	1	10.800		6277270

St Steel

End piece for GS device installation trunking.




End piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			m	kg/100 m	
GS-E90130RW	Pure white	1	13.800		6277370

St Steel

End piece for GS device installation trunking.




Sheet steel partition, trunking height 70 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		m	kg/100 m	
GS-TW70	2000	70	2	58.650		6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking height 90 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		m	kg/100 m	
GS-TW90	2000	90	2	74.400		6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					m	kg/100 pcs.	
KL80A	—	—	Light grey	20	0.685		6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket


Type	Surface finish	Length		Pack. pcs	Weight		Item No.
		mm	Colour		m	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610		6288704

St Steel

G Electrogalvanised


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Trunking height 70 and 90 mm, trunking width 170 mm

Device installation trunking, trunking height 70 mm




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S70170RW	Pure white	2000	8	352.000	6277600

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Device installation trunking, trunking height 90 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-S90170RW	Pure white	2000	6	384.000	6277700

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Coupling, trunking height 90 mm




Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Accessory mounting box, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide


Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100	pcs.	
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTGRW	Pure white	2000	16	27.500		6278680

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTKRW	Pure white	2000	16	27.000		6278780


PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking height 70 and 90 mm, trunking width 170 mm

Joint cover, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS70170RW	Pure white	1	6.000		6279768

St Steel

Joint cover to hide sawn trunking joint edges.

Joint cover, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS90170RW	Pure white	1	6.700		6279784

St Steel

Joint cover to hide sawn trunking joint edges.

External corner cover, variable




Type	Colour	Length mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.	pcs.	
GK-AH70170RW	Pure white	130.5	1	20.490		6274610

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.

External corner, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-SA70170RW	Pure white	1	236.000		6277610

St Steel

External corner for changing the direction of the GS device installation trunking.

External corner, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-SA90170RW	Pure white	1	265.000		6277710

St Steel

External corner for changing the direction of the GS device installation trunking.

Sheet steel external corner cover, 80 mm system opening



Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OTARW	Pure white	1	21.400		6279870


St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.

External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790
PVC Polyvinylchloride				


PVC external corner cover, smooth surface.



Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70170RW	Pure white	212.5	1	19.131	6274620
PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene					


Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.



Flat angle, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS70170RW	Pure white	1	152.000	6277620
St Steel				


Flat angle for changing the direction of the GS device installation trunking.



Flat angle, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SFS90170RW	Pure white	1	167.000	6277720
St Steel				


Flat angle for changing the direction of the GS device installation trunking.



Sheet steel flat angle cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860
St Steel				


Cover for closing the flat angle of the Rapid 80 GS device installation trunking.



Flat angle cover, smooth


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490
PVC Polyvinylchloride				

Flat angle cover, smooth surface.



Trunking height 70 and 90 mm, trunking width 170 mm

Internal corner cover, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70170RW	Pure white	1	16.300	6274640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SI70170RW	Pure white	1	67.000	6277640

St Steel

Internal corner for direct installation on GS device installation trunking.

Internal corner, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-SI90170RW	Pure white	1	86.000	6277740

St Steel

Internal corner for direct installation on GS device installation trunking.

T-piece, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-ST70170RW	Pure white	1	172.000	6277660

St Steel

T-piece suitable for direct wall mounting.

T-piece, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-ST90170RW	Pure white	1	186.000	6277760

St Steel

T-piece suitable for direct wall mounting.

End piece, trunking height 70 mm



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E70170RW	Pure white	1	12.900	6277670

St Steel

End piece for GS device installation trunking.




End piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.		
GS-E90170RW	Pure white	1	16.300		6277770

St Steel

End piece for GS device installation trunking.




Sheet steel partition, trunking height 70 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		kg/100 m		
GS-TW70	2000	70	2	58.650		6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking height 90 mm

Type	Length		Pack. m	Weight		Item No.
	mm	Suitable for trunking depth		kg/100 m		
GS-TW90	2000	90	2	74.400		6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100 pcs.		
KL80A	—	—	Light grey	20	0.685		6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket



Type	Surface finish	Length		Pack. pcs	Weight		Item No.
		mm	Colour		kg/100 pcs.		
8AWR	Electrogalvanised	—	—	10	0.610		6288704

St Steel

G Electrogalvanised


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Trunking height 70 and 90 mm, trunking width 170 mm, asymmetrical

Device installation trunking, trunking height 70 mm




Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70170RW	Pure white	2000	8	352.000	6277800
St	Steel				

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Device installation trunking, trunking height 90 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90170RW	Pure white	2000	6	384.000	6277900
St	Steel				

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.


Coupling, trunking height 70 mm



Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290
V2A	Stainless steel, grade 304			

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.


Coupling, trunking height 90 mm



Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294
V2A	Stainless steel, grade 304			

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.

Accessory mounting box, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610
PA	Polyamide			


Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100	pcs.	
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight		Item No.
					kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




Plastic trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTGRW	Pure white	2000	16	27.500		6278680

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.




Plastic trunking cover, fluted

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m	pcs.	
GK-OTKRW	Pure white	2000	16	27.000		6278780


PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.



Trunking height 70 and 90 mm, trunking width 170 mm, asymmetrical

Joint cover, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS70170RW	Pure white	1	6.000		6279768

St Steel

Joint cover to hide sawn trunking joint edges.

Joint cover, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS90170RW	Pure white	1	6.700		6279784

St Steel

Joint cover to hide sawn trunking joint edges.

External corner cover, variable




Type	Colour	Length mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.	pcs.	
GK-AH70170RW	Pure white	130.5	1	20.490		6274610

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.

External corner, trunking height 70 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-AA70170RW	Pure white	1	237.000		6277810

St Steel

External corner for changing the direction of the GS device installation trunking.

External corner, trunking height 90 mm




Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-AA90170RW	Pure white	1	265.000		6277910

St Steel

External corner for changing the direction of the GS device installation trunking.

Sheet steel external corner cover, 80 mm system opening



Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OTARW	Pure white	1	21.400		6279870


St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.

External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790

PVC Polyvinylchloride
PVC external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70170RW	Pure white	212.5	1	19.131	6274620

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.




Flat angle, rising, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS70170RW	Pure white	1	152.000	6277820

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.




Flat angle, rising, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS90170RW	Pure white	1	167.000	6277920

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.




Flat angle, falling, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF70170RW	Pure white	1	152.000	6277830

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.




Flat angle, falling, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF90170RW	Pure white	1	167.000	6277930


St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.



Trunking height 70 and 90 mm, trunking width 170 mm, asymmetrical

Sheet steel flat angle cover, 80 mm system opening




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Cover for closing the flat angle of the Rapid 80 GS device installation trunking.

Flat angle cover, smooth




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

PVC Polyvinylchloride

Flat angle cover, smooth surface.

Internal corner cover, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.

Internal corner, simplified, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Internal corner for direct installation on GS device installation trunking.

Internal corner, simplified, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Internal corner for direct installation on GS device installation trunking.

T-piece, trunking height 70 mm



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel


T-piece suitable for direct wall mounting.

T-piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AT90170RW	Pure white	1	186.000	6277960

St Steel

T-piece suitable for direct wall mounting.




End piece, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E70170RW	Pure white	1	12.900	6277670

St Steel

End piece for GS device installation trunking.




End piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-E90170RW	Pure white	1	16.300	6277770

St Steel

End piece for GS device installation trunking.




Sheet steel partition, trunking height 70 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW70	2000	70	2	58.650	6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.




Sheet steel partition, trunking height 90 mm

Type	Length mm	Suitable for trunking depth	Pack. m	Weight kg/100 m	Item No.
GS-TW90	2000	90	2	74.400	6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640



PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Trunking height 70 and 90 mm, trunking width 170 mm, asymmetrical

Protective conductor connection bracket



Type	Surface	Length		Pack.	Weight	Item No.
	finish	mm	Colour	pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

S Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²




Device installation trunking, trunking height 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D70170RW	Pure white	2000	8	382.000	6278200

St. Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening for device installation is 76.5 mm. The second trunking track with a system opening of 45 mm is used for cable routing. Installation of Modul 45 switching and connection devices is not possible here. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking height 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D90170RW	Pure white	2000	6	423.300	6278300

St. Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening for device installation is 76.5 mm. The second trunking track with a system opening of 45 mm is used for cable routing. Installation of Modul 45 switching and connection devices is not possible here. The cover must be ordered separately.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.





Coupling, trunking height 70 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking height 90 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610


PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.



Trunking height 70 and 90 mm, trunking width 170 mm, duoduct


Accessory mounting box, double



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611
PA Polyamide				

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.


Strain relief for service outlet



Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
7ZE	50	0.700	6288790
PA Polyamide			

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.


Sheet steel trunking cover, 80 mm system opening



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GS-OTRW	Pure white	2000	2	65.000	6279850
St Steel					

Cover to close the device installation trunking GEK-S and GEK-A.



Sheet steel trunking cover, 50 mm system opening



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GS-OT50RW	Pure white	2000	2	45.550	6279880
St Steel					

Cover for closing the GEK-S device installation trunking. Sheet steel version.


Locking bracket for covers, 80 mm system opening



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
RKV3V	—	—	—	20	0.085	6288700
St Steel						

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

Joint cover, trunking height 70 mm



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
G-SVS70170RW	Pure white	1	6.000	6279768
St Steel				


Joint cover to hide sawn trunking joint edges.

Joint cover, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
G-SVS90170RW	Pure white	1	6.700	6279784	

St Steel

Joint cover to hide sawn trunking joint edges.




External corner cover, variable

Type	Colour	Length mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.	pcs.	
GK-AH70170RW	Pure white	130.5	1	20.490	6274610	

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.





External corner, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DA70170RW	Pure white	1	270.000	6278210	

St Steel

External corner for changing the direction of the GS device installation trunking.





External corner, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DA90170RW	Pure white	1	312.000	6278310	

St Steel

External corner for changing the direction of the GS device installation trunking.




Sheet steel external corner cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OTARW	Pure white	1	21.400	6279870	

St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.




Sheet steel external corner cover, 50 mm system opening

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OT50ARW	Pure white	1	14.700	6279890	


St Steel

Cover for closing external corners.



Trunking height 70 and 90 mm, trunking width 170 mm, duoduct

Flat angle cover




Type	Colour	Length mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
GK-FH70170RW	Pure white	212.5	1	19.131	6274620

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.

Flat angle, rising, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-DFS70170RW	Pure white	1	180.000	6278220

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, rising, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-DFS90170RW	Pure white	1	203.000	6278320

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-DFF70170RW	Pure white	1	175.000	6278230

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-DFF90170RW	Pure white	1	196.600	6278330

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Sheet steel flat angle cover, 80 mm system opening



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-OTFRW	Pure white	1	47.600	6279860

St Steel


Cover for closing the flat angle of the Rapid 80 GS device installation trunking.

Sheet steel flat angle cover, 50 mm system opening

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-OT50FRW	Pure white	1	34.400	6279990	

St Steel

Sheet steel flat angle cover for 50 mm system opening




Internal corner cover, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GK-IH70170RW	Pure white	1	16.300	6274640	

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.




Internal corner, simplified, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DI70170RW	Pure white	1	63.000	6278240	

St Steel

Internal corner for direct installation on GS device installation trunking.




Internal corner, simplified, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DI90170RW	Pure white	1	71.000	6278340	

St Steel

Internal corner for direct installation on GS device installation trunking.




T-piece, trunking height 70 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DT70170RW	Pure white	1	188.100	6278260	

St Steel

T-piece suitable for direct wall mounting.




T-piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
GS-DT90170RW	Pure white	1	207.000	6278360	


St Steel

T-piece suitable for direct wall mounting.



Trunking height 70 and 90 mm, trunking width 170 mm, duoduct

End piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E70170RW	Pure white	1	12.900	6277670

St Steel

End piece for GS device installation trunking.

End piece, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E90170RW	Pure white	1	16.300	6277770

St Steel

End piece for GS device installation trunking.

Sheet steel partition, trunking height 70 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW70	2000	70	2	58.650	6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Sheet steel partition, trunking height 90 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW90	2000	90	2	74.400	6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Duct clamp





Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking, trunking height 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A70210RW	Pure white	2000	8	415.000	6278000

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking height 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-A90210RW	Pure white	2000	6	447.000	6278100

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.





Coupling, trunking height 70 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking height 90 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611


PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.



Trunking height 70 and 90 mm, trunking width 210 mm, asymmetrical

Strain relief for service outlet



Type


7ZE

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.

Pack. pcs	Weight kg/100 pcs.	Item No.
50	0.700	6288790

Sheet steel trunking cover, 80 mm system opening



Type



GS-OTRW

Si Steel

Cover to close the device installation trunking GEK-S and GEK-A.

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-OTRW	Pure white	2000	2	65.000	6279850

Locking bracket for covers, 80 mm system opening



Type


RKV3V

Si Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6287700

Plastic trunking cover, smooth



Type


GK-OTGRW

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6278680

Plastic trunking cover, fluted



Type


GK-OTKRW

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2000	16	27.000	6278780

Joint cover, trunking height 70 mm



Type

G-SVS70210RW

Si Steel

Joint cover to hide sawn trunking joint edges.


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
G-SVS70210RW	Pure white	1	6.700	6279772

Joint cover, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
G-SVS90210RW	Pure white	1	7.500	6279788

St Steel

Joint cover to hide sawn trunking joint edges.




External corner cover, variable, trunking height 70 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70210RW	Pure white	130.5	1	20.700	6273910

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner, trunking depth 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AA70210RW	Pure white	1	279.000	6278010

St Steel

External corner for changing the direction of the GS device installation trunking.




External corner, trunking depth 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AA90210RW	Pure white	1	309.000	6278110

St Steel

External corner for changing the direction of the GS device installation trunking.




Sheet steel external corner cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTARW	Pure white	1	21.400	6279870

St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGARW	Pure white	2	9.500	6274790


PVC Polyvinylchloride

PVC external corner cover, smooth surface.



Trunking height 70 and 90 mm, trunking width 210 mm, asymmetrical

Flat angle cover, trunking height 70 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70210RW	Pure white	252.5	1	26.600	6273920

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.

Flat angle, rising, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS70210RW	Pure white	1	162.000	6278020

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, rising, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFS90210RW	Pure white	1	175.000	6278120

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF70210RW	Pure white	1	162.000	6278030

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AFF90210RW	Pure white	1	175.000	6278130

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Sheet steel flat angle cover, 80 mm system opening



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860


St Steel

Cover for closing the flat angle of the Rapid 80 GS device installation trunking.

Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490


PVC Polyvinylchloride
Flat angle cover, smooth surface.



Internal corner cover, variable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70210RW	Pure white	1	16.800	6273940


PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene
Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.



Internal corner, simplified, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AI70210RW	Pure white	1	75.000	6278050


St Steel
Internal corner for direct installation on GS device installation trunking.



Internal corner, simplified, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AI90210RW	Pure white	1	95.000	6278140


St Steel
Internal corner for direct installation on GS device installation trunking.



T-piece, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AT70210RW	Pure white	1	202.000	6278060


St Steel
T-piece suitable for direct wall mounting.



T-piece, trunking height 90 mm


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-AT90210RW	Pure white	1	216.000	6278160

St Steel
T-piece suitable for direct wall mounting.



Trunking height 70 and 90 mm, trunking width 210 mm, asymmetrical

End piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E70210RW	Pure white	1	14.900	6278070

St Steel

End piece for GS device installation trunking.

End piece, trunking height 90 mm



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E90210RW	Pure white	1	18.800	6277170

St Steel

End piece for GS device installation trunking.

Sheet steel partition, trunking height 70 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW70	2000	70	2	58.650	6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Sheet steel partition, trunking height 90 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW90	2000	90	2	74.400	6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Duct clamp




Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking, trunking height 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D70210CW	Cream	2000	8	420.000	6278401

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking height 90 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GS-D90210RW	Pure white	2000	6	462.000	6278500

St Steel

GS device installation trunking for mounting on the wall or on fastening panels. The GS device installation trunking possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupler. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm.

Overlengths up to 3,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.





Coupling, trunking height 70 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP70	120	1	6.400	6277290

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Coupling, trunking height 90 mm

Type	Length mm	Pack. PU	Weight kg/100 PUs	Item No.
GS-KUP90	120	1	8.200	6277294

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611


PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.



Trunking height 70 and 90 mm, trunking width 210 mm, duoduct

Strain relief for service outlet



Type


7ZE

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.

Pack. pcs	Weight		Item No.
	kg/100 pcs	pcs.	
50	0.700		6288790

Sheet steel trunking cover, 80 mm system opening



Type


GS-OTRW

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GS-OTRW	Pure white	2000	2	65.000	6279850

Locking bracket for covers, 80 mm system opening



Type


RKV3V

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
RKV3V	—	—	—	20	0.085	6287700

Plastic trunking cover, smooth



Type


GK-OTGRW

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GK-OTGRW	Pure white	2000	16	27.500	6278680

Plastic trunking cover, fluted



Type


GK-OTKRW

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.

Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
GK-OTKRW	Pure white	2000	16	27.000	6278780

Joint cover, trunking height 70 mm



Type

G-SVS70210RW

St Steel

Joint cover to hide sawn trunking joint edges.


Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
G-SVS70210RW	Pure white	1	6.700	6279772

Joint cover, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Joint cover to hide sawn trunking joint edges.




External corner cover, variable, trunking height 70 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.




External corner, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

External corner for changing the direction of the GS device installation trunking.





External corner, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

External corner for changing the direction of the GS device installation trunking.




Sheet steel external corner cover, 80 mm system opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

St Steel

Cover for closing the external corner of the Rapid 80 GS device installation trunking.




External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.


PVC Polyvinylchloride

PVC external corner cover, smooth surface.



Trunking height 70 and 90 mm, trunking width 210 mm, duoduct

Flat angle cover, trunking height 70 mm




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70210RW	Pure white	252.5	1	26.600	6273920

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.

Flat angle, rising, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DFS70210RW	Pure white	1	177.000	6278420

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, rising, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DFS90210RW	Pure white	1	197.700	6278520

St Steel

Flat angle, rising, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 70 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DF70210RW	Pure white	1	177.000	6278430

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Flat angle, falling, trunking height 90 mm




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DF90210RW	Pure white	1	197.400	6278530

St Steel

Flat angle, falling, for changing the direction of the GS device installation trunking.

Sheet steel flat angle cover, 80 mm system opening



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-OTFRW	Pure white	1	47.600	6279860


St Steel

Cover for closing the flat angle of the Rapid 80 GS device installation trunking.

Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFRW	Pure white	1	17.000	6274490

PVC Polyvinylchloride
Flat angle cover, smooth surface.




Internal corner cover, variable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70210RW	Pure white	1	16.800	6273940

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.




Internal corner, simplified, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DI70210RW	Pure white	1	77.000	6278440

St Steel

Internal corner for direct installation on GS device installation trunking.




Internal corner, simplified, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DI90210RW	Pure white	1	86.000	6278540

St Steel

Internal corner for direct installation on GS device installation trunking.




T-piece, trunking height 70 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DT70210RW	Pure white	1	207.000	6278460

St Steel

T-piece suitable for direct wall mounting.




T-piece, trunking height 90 mm

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GS-DT90210RW	Pure white	1	226.000	6278560


St Steel

T-piece suitable for direct wall mounting.



Trunking height 70 and 90 mm, trunking width 210 mm, duoduct

End piece, trunking height 70 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E70210RW	Pure white	1	14.900	6278070

St Steel

End piece for GS device installation trunking.

End piece, trunking height 90 mm




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GS-E90210RW	Pure white	1	18.800	6278170

St Steel

End piece for GS device installation trunking.

Sheet steel partition, trunking height 70 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW70	2000	70	2	58.650	6277090

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Sheet steel partition, trunking height 90 mm




Type	Length		Pack. Weight		Item No.
	mm	Suitable for trunking depth	m	kg/100 m	
GS-TW90	2000	90	2	74.400	6277095

St Steel

Partition to divide the trunking for different voltage levels. Self-conducting contacting during mounting.

Duct clamp




Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.


Clamping area: 2 x 1.5 – 4 mm²

Device installation trunking, desk trunking

Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m		
GEK-SA133110RW	Pure white	2000	8	332.000		6282700

St Steel

GEK-S device installation trunking with base perforation suitable for installation on desks, etc. The visible surfaces of the painted GEK-S device installation trunking are laminated. The trunking system possesses self-contacting locking straps to accept a sheet steel partition. The equipotential bonding between the trunking bases takes place using the trunking coupling. The protective measure and the equipotential bonding is guaranteed between the cover and the base by the self-contacting trunking cover. The real system opening is 76.5 mm. The cover must be ordered separately.




Coupling

Type	Dimen- sion a mm	Dimen- sion b mm	Pack. pcs	Weight		Item No.
				kg/100 pcs.		
KUPP	105	132	1	14.800		6288680

V2A Stainless steel, grade 304

Coupling for connecting the trunking bases. This creates the equipotential bonding between the trunking bases.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.		
71GD6	Iron grey	5	5.600		6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.		
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100 pcs.		
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD... . Cable clamping range to 14 mm.




Sheet steel trunking cover, 80 mm system opening



Type	Colour	Length mm	Pack. m	Weight		Item No.
				kg/100 m		
GS-OTRW	Pure white	2000	2	65.000		6279850

St Steel

Cover to close the device installation trunking GEK-S and GEK-A.




Locking bracket for covers, 80 mm system opening



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700
St	Steel					

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.


Plastic trunking cover, smooth



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6287680
PVC	Polyvinylchloride				

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.


Plastic trunking cover, fluted



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKRW	Pure white	2000	16	27.000	6287800
PVC	Polyvinylchloride				

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.


External corner



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-SAA133110RW	Pure white	1	205.000	6282710
St	Steel			

External corner suitable for direct wall mounting.


External corner cover, sheet steel



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AOP3S80RW	Pure white	1	39.000	6287050
St	Steel			

Cover for closing external corners.

Rising flat angle



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-SAFS133110RW	Pure white	1	169.000	6282720
St	Steel			


Flat angle, rising, for changing the direction of the GS device installation trunking.

Sheet steel flat angle cover, rising

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
FOOP3SRW	Pure white	1	41.000	6287060

St Steel

Cover for closing flat angles.




Falling flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-SAFF133110RW	Pure white	1	169.000	6282730

St Steel

Flat angle, falling, suitable for direct wall mounting.




Sheet steel flat angle cover, falling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
FUOP3RW	Pure white	1	41.000	6287070

St Steel

Cover for closing flat angles.





Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-SAIS133110RW	Pure white	1	188.300	6282740

St Steel

Internal corner suitable for direct wall mounting.




Sheet steel internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
IOP3RW	Pure white	1	39.000	6287080

St Steel

Cover for closing internal corners.




End piece, left

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GEK-SEL133110RW	Pure white	1	24.000	6282870


St Steel

End piece for GS device installation trunking.



Desk trunking

End piece, right




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
GEK-SER133110RW	Pure white	1	24.000	6282770

St Steel

End piece for GS device installation trunking.

Partition




Type	Length mm	Suitable for trunking depth	Pack. Weight		Item No.
			m	kg/100 m	
TWP	2000	133	2	87.000	6288264

St Steel

FS Strip-galvanised

Partition for desk trunking to divide the trunking for different voltage levels.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²






Rapid 80 aluminium device installation trunking systems

	Device installation trunking, 1-compartment, trunking width 110 mm	248
	Device installation trunking, 1-compartment, trunking width 130 mm	251
	Device installation trunking, 1-compartment, trunking width 170 mm	256
	Device installation trunking, 2-compartment, trunking width 210 mm	263
	GAD design trunking	266

Trunking height 70 mm, trunking width 110 mm

Device installation trunking, trunking height 70 mm




Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70110EL	—	Anodised	2000	12	198.200	6279203
GA-S70110RW	Pure white	—	2000	12	198.200	6279200

Alu Aluminium
EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	6279701

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.

Accessory mounting box, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Strain relief for service outlet




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...

Trunking cover 80 mm



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	6279720
GA-OTEL	—	Anodised	2000	2	38.300	6279723

Alu Aluminium
EL Anodised



Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70110EL	—	Anodised	1	159.400	6279213
GA-SA70110RW	Pure white	—	1	159.400	6279210

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.




External corner cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	6279225
GA-OTAEL	—	Anodised	300	1	12.900	6279227

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.




Flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70110EL	—	Anodised	1	126.600	6279223
GA-SF70110RW	Pure white	—	1	126.600	6279220

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.




Flat angle cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	6279234
GA-OTFEL	—	Anodised	400	1	28.600	6279236

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.




Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70110EL	—	Anodised	1	137.400	6279243
GA-SI70110RW	Pure white	—	1	137.400	6279240

Alu Aluminium


EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.



Trunking height 70 mm, trunking width 110 mm

T-piece




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70110EL	—	Anodised	1	96.600	6279263
GA-ST70110RW	Pure white	—	1	96.600	6279260

Alu Aluminium
EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.

End piece aluminium




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70110EL	—	Anodised	1	11.200	6279273
GA-E70110RW	Pure white	—	1	11.200	6279270

Alu Aluminium
EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

End piece




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70110WA	White aluminium	1	4.900	6274374
GK-E70110RW	Pure white	1	5.009	6274370

PVC Polyvinylchloride PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the GK device installation trunking.

Partition for ISS140110




Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.

Duct clamp





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electro galvanised	—	—	10	0.610	6288704

St Steel
G Electro galvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking, trunking height 70 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70130EL	—	2000	12	219.700	6279303
GA-S70130RW	Pure white	2000	12	219.700	6279300

Alu Aluminium

EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Device installation trunking, trunking height 90 mm

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S90130EL	—	Anodised	2000	8	241.300	6276903
GA-S90130RW	Pure white	—	2000	8	241.300	6276900

Alu Aluminium

EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking height 70 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	6279701

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.





Coupling, trunking height 90 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP90	90	1	8.200	6279704

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611


PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.



Trunking height 70 and 90 mm, trunking width 130 mm

Strain relief for service outlet



Type


7ZE

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...

Pack. pcs	Weight kg/100 pcs.	Item No.
50	0.700	6288790

Trunking cover 80 mm



Type

GA-OTRW

GA-OTEL


Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	6279720
GA-OTEL	—	Anodised	2000	2	38.300	6279723

External corner, trunking height 70 mm



Type

GA-SA70130EL

GA-SA70130RW


Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70130EL	Anodised	300	—	1	173.600	6279313
GA-SA70130RW	—	300	Pure white	1	173.600	6279310

External corner, trunking height 90 mm



Type

GA-SA90130EL

GA-SA90130RW


Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA90130EL	—	300	1	199.600	6276913
GA-SA90130RW	Pure white	300	1	199.600	6276910

External corner cover



Type

GA-OTARW

GA-OTAEL


Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	6279725
GA-OTAEL	—	Anodised	300	1	12.900	6279727

Flat angle, trunking height 70 mm



Type

GA-SF70130EL

GA-SF70130RW

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70130EL	Anodised	300	—	1	132.600	6279323
GA-SF70130RW	—	300	Pure white	1	132.600	6279320


Flat angle, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF90130EL	Anodised	300	—	1	140.500	6276923
GA-SF90130RW	—	300	Pure white	1	140.500	6276920

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.




Flat angle cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	6279734
GA-OTFEL	—	Anodised	400	1	28.600	6279736

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.




Internal corner, trunking height 70 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70130EL	Anodised	300	—	1	148.800	6279343
GA-SI70130RW	—	300	Pure white	1	148.800	6279340

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.





Internal corner, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI90130EL	Anodised	300	—	1	163.800	6276943
GA-SI90130RW	—	300	Pure white	1	163.800	6276940

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.




T-piece, trunking height 70 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70130EL	Anodised	500	—	1	106.900	6279363
GA-ST70130RW	—	500	Pure white	1	106.900	6279360

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.




T-piece, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST90130EL	Anodised	500	—	1	116.400	6276963
GA-ST90130RW	—	500	Pure white	1	116.400	6276960

Alu Aluminium


EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.



Trunking height 70 and 90 mm, trunking width 130 mm

End piece aluminium, trunking height 70 mm

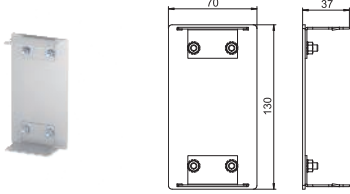


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70130EL	Anodised	37	—	1	11.900	6279373
GA-E70130RW	—	37	Pure white	1	11.900	6279370

Alu Aluminium
EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

End piece aluminium, trunking height 90 mm

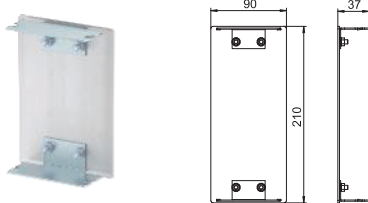


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E90130EL	Anodised	37	—	1	14.500	6276973
GA-E90130RW	—	37	Pure white	1	14.500	6276970

Alu Aluminium
EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

End piece

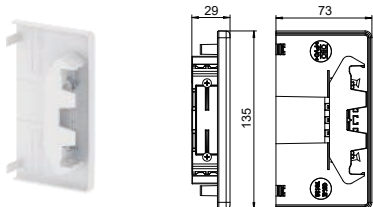


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70130WA	—	—	White aluminium	1	5.400	6274574
GK-E70130RW	—	—	Pure white	1	5.574	6274570

PVC Polyvinylchloride PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the GK device installation trunking.

Locking bracket for covers, 80 mm system opening

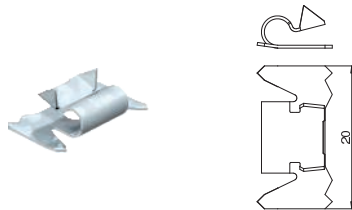


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

Partition for ISS140110




Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.

Partition, trunking height 90 mm



Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW90	—	2000	—	2	67.300	6279714

St Steel

Partition to divide the Rapid 80 GA and Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

Duct clamp

Type	Surface		Length mm	Colour	Pack. pcs	Weight		Item No.
	finish	mm				kg/100	pcs.	
KL80A	—	—	—	Light grey	20	0.685		6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket


Type	Surface		Length mm	Colour	Pack. pcs	Weight		Item No.
	finish	mm				kg/100	pcs.	
BAWR	Electro	galvanised	—	—	10	0.610		6288704

St Steel

G Electro


Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Trunking height 70 mm, trunking width 170 mm

Device installation trunking, trunking height 70 mm




Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70170EL	—	Anodised	2000	8	262.900	6279103
GA-S70170RW	Pure white	—	2000	8	262.900	6279100

Alu Aluminium

EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm




Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	6279701

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.

Accessory mounting box, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Strain relief for service outlet




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...

Trunking cover 80 mm



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	6279720
GA-OTEL	—	Anodised	2000	2	38.300	6279723

Alu Aluminium

EL Anodised



Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.




External corner

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70170EL	Anodised	300	—	1	202.200	6279113
GA-SA70170RW	—	300	Pure white	1	202.200	6279110

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.




External corner cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	6279125
GA-OTAEL	—	Anodised	300	1	12.900	6279127

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.




Flat angle

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70170EL	—	300	1	142.600	6279123
GA-SF70170RW	Pure white	300	1	142.600	6279121

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.




Flat angle cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	6279134
GA-OTFEL	—	Anodised	400	1	28.600	6279136

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.




Internal corner

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70170EL	Anodised	2000	—	1	172.000	6279143
GA-SI70170RW	—	2000	Pure white	1	172.000	6279140

Alu Aluminium


EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.



Trunking height 70 mm, trunking width 170 mm

T-piece




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70170EL	—	2000	1	127.600	6279163
GA-ST70170RW	Pure white	2000	1	127.600	6279160

Alu Aluminium
EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.

End piece aluminium




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70170EL	—	Anodised	37	1	13.400	6279473
GA-E70170RW	Pure white	—	37	1	13.400	6279470

Alu Aluminium
EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

End piece




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70170WA	White aluminium	1	4.900	6274774
GK-E70170RW	Pure white	1	6.840	6274770

PVC Polyvinylchloride PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the GK device installation trunking.

Partition for ISS140110




Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.

Duct clamp





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking, trunking height 70 mm

Type	Surface finish	Length mm	Colour	Pack. m	Weight		Item No.
					kg/100 m		
GA-A70170EL	Anodised	2000	—	8	262.900		6279403
GA-A70170RW	—	2000	Pure white	8	262.900		6279400

Alu Aluminium

EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.




Coupling, trunking height 70 mm

Type	Trunking depth mm	Pack. PU	Weight		Item No.
			kg/100 PUs		
GA-KUP70	70	1	5.800		6279701

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.		
71GD6	Iron grey	5	5.600		6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.		
71GD7	Iron grey	2	11.000		6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight		Item No.
		kg/100 pcs.		
7ZE	50	0.700		6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...




Trunking cover 80 mm

Type	Colour	Surface finish	Length mm	Pack. m	Weight		Item No.
					kg/100 m		
GA-OTRW	Pure white	—	2000	2	38.300		6279720
GA-OTEL	—	Anodised	2000	2	38.300		6279723

Alu Aluminium



EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).



Trunking height 70 mm, trunking width 170 mm, asymmetrical

Locking bracket for covers, 80 mm system opening




Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

External corner, trunking height 70 mm




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AA70170EL	—	Anodised	1	202.200	6279413
GA-AA70170RW	Pure white	—	1	202.200	6279410

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

External corner cover




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	6279425
GA-OTAEI	—	Anodised	300	1	12.900	6279427

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Flat angle, rising, trunking height 70 mm




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFS70170EL	—	Anodised	300	1	142.600	6279423
GA-AFS70170RW	Pure white	—	300	1	142.600	6279420

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle, falling, trunking height 70 mm




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFF70170EL	—	Anodised	300	1	132.600	6279433
GA-AFF70170RW	Pure white	—	300	1	132.600	6279430

Alu Aluminium

EL Anodised

Flat angle, falling, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle cover



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	6279734
GA-OTFEL	—	Anodised	400	1	28.600	6279736

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.


Internal corner, trunking height 70 mm

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AI70170EL	—	Anodised	1	172.000	6279443
GA-AI70170RW	Pure white	—	1	172.000	6279440

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.




T-piece, trunking height 70 mm

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AT70170EL	—	Anodised	1	127.600	6279463
GA-AT70170RW	Pure white	—	1	127.600	6279460

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.




End piece aluminium

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ET70170EL	—	Anodised	37	1	13.400	6279473
GA-ET70170RW	Pure white	—	37	1	13.400	6279470

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70170WA	White aluminium	1	4.900	6274774
GK-E70170RW	Pure white	1	6.840	6274770

PVC Polyvinylchloride PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

End piece for closing the GK device installation trunking.




Partition for ISS140110

Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640



PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Trunking height 70 mm, trunking width 170 mm, asymmetrical

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electrogalvanised	—	—	10	0.610	6288704

S Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²


Device installation trunking, trunking height 90 mm

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-D90210EL	—	Anodised	2000	6	378.600	6279603
GA-D90210RW	Pure white	—	2000	6	378.600	6279600

Alu Aluminium

EL Anodised

Device installation trunking without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.





Coupling, trunking height 90 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP90	90	1	8.200	6279704

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.




Accessory mounting box, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Accessory mounting box, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.




Strain relief for service outlet

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
7ZE	50	0.700	6288790

PA Polyamide

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...




Trunking cover 80 mm

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	6279720
GA-OTEL	—	Anodised	2000	2	38.300	6279723

Alu Aluminium


EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).



Trunking height 90 mm, trunking width 210 mm, duoduct

Locking bracket for covers, 80 mm system opening




Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.

External corner, trunking height 90 mm




Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DA90210EL	—	Anodised	1	291.000	6279613
GA-DA90210RW	Pure white	—	1	291.000	6279610

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

External corner cover




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	6279625
GA-OTAEL	—	Anodised	300	1	12.900	6279627

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Flat angle, trunking height 90 mm




Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DF90210EL	—	Anodised	300	1	184.800	6279623
GA-DF90210RW	Pure white	—	300	1	184.800	6279620

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle cover





Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	6279634
GA-OTFEL	—	Anodised	400	1	28.600	6279636

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.

Internal corner, trunking height 90 mm



Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DI90210EL	—	Anodised	1	237.200	6279643
GA-DI90210RW	Pure white	—	1	237.200	6279640

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.


T-piece, trunking height 90 mm

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DT90210EL	—	Anodised	1	177.400	6279663
GA-DT90210RW	Pure white	—	1	177.400	6279660

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.




End piece, trunking height 90 mm

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E90210EL	—	Anodised	1	18.800	6279673
GA-E90210RW	Pure white	—	1	18.800	6279670

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.




Partition for ISS140110

Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.




Partition, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW90	—	2000	—	2	67.300	6279714

St Steel

Partition to divide the Rapid 80 GA and Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.



Duct clamp

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KL80A	—	—	Light grey	20	0.685	6288640

PC/ABS Polycarbonate/acrylnitrile-butadiene-styrene

Duct clamp for holding cables securely and for fastening the partition in Rapid 80 GK, GS and GA device installation trunking systems as well as in ISS service poles with a 76.5 mm system opening.



Protective conductor connection bracket


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel


G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²




Design device installation trunking



Type	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GAD UEL	Anodised	2000	2	292.750	6115775
Alu	Aluminium				
EL	Anodised				

Base to create design device installation trunking of the GAD series. 45 mm system opening for acceptance of Modul 45 switch and connection devices and appropriate PVC and aluminium covers of the Rapid 45 series. The trunking base can be completed with trunking covers in the "Swing", "Soft" or "Style" design. The GAD OTA cover adapters are essential and must be planned on the trunking section with a max. spacing of 50 cm. A GAD OTD spacer must be placed between the trunking covers. In the as-delivered state, the 45 mm system is closed off with a black trunking cover.

Swing trunking cover, design trunking



Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OT GAD Swing EL	Anodised	1000	1	126.100	6115825
Alu	Aluminium				
EL	Anodised				

Trunking cover to create a design device installation trunking of the GAD series. "Swing" design version for complete coverage of the system opening and the switching and plug-in devices. The GAD OTA cover adapters are essential and must be planned on the trunking section with a max. spacing of 50 cm. A GAD OTD spacer must be placed between the trunking covers.


Soft trunking cover, design trunking



Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OT GAD Soft EL	Anodised	1000	1	124.900	6115835
Alu	Aluminium				
EL	Anodised				

Trunking cover to create a design device installation trunking of the GAD series. "Soft" design version for complete coverage of the system opening and the switching and plug-in devices. The GAD OTA cover adapters are essential and must be planned on the trunking section with a max. spacing of 50 cm. A GAD OTD spacer must be placed between the trunking covers.



Style trunking cover, design trunking



Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OT GAD Style EL	Anodised	1000	1	125.000	6115845
Alu	Aluminium				
EL	Anodised				

Trunking cover to create a design device installation trunking of the GAD series. "Style" design version for complete coverage of the system opening and the switching and plug-in devices. The GAD OTA cover adapters are essential and must be planned on the trunking section with a max. spacing of 50 cm. A GAD OTD spacer must be placed between the trunking covers.

External corner, design trunking




Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD AEL	Anodised	1	233.000	6115789
Alu	Aluminium			
EL	Anodised			

External corner base to create a design device installation trunking of the GAD series. 45 mm system opening for acceptance of Modul 45 switch and connection devices and appropriate PVC and aluminium covers of the Rapid 45 series. The fitting can be completed with fitting covers in the "Swing", "Soft" or "Style" design. The GAD OTA cover adapters are essential. A GAD OTD spacer must be placed between the trunking covers.

External corner cover, Swing

Type	Surface finish		Pack. pcs	Weight kg/100 pcs.	Item No.
	Surface	finish			
OT A Swing EL	Anodised		1	105.900	6115851
Alu	Aluminium				
EL	Anodised				


Trunking cover for the external corner of the design device installation trunking of the GAD series. "Swing" design version for complete coverage of the system opening and the switching and plug-in devices.



External corner cover, Soft

Type	Surface finish		Pack. pcs	Weight kg/100 pcs.	Item No.
	Surface	finish			
OT A Soft EL	Anodised		1	104.600	6115855
Alu	Aluminium				
EL	Anodised				


Trunking cover for the external corner of the design device installation trunking of the GAD series. "Soft" design version for complete coverage of the system opening and the switching and plug-in devices.



External corner cover, Style

Type	Surface finish		Pack. pcs	Weight kg/100 pcs.	Item No.
	Surface	finish			
OT A Style EL	Anodised		1	104.300	6115865
Alu	Aluminium				
EL	Anodised				


Trunking cover for the external corner of the design device installation trunking of the GAD series. "Style" design version for complete coverage of the system opening and the switching and plug-in devices.



Internal corner, design trunking

Type	Surface finish		Pack. pcs	Weight kg/100 pcs.	Item No.
	Surface	finish			
GAD IEL	Anodised		1	183.000	6115795
Alu	Aluminium				
EL	Anodised				


Internal corner base to create a design device installation trunking of the GAD series. 45 mm system opening for acceptance of Modul 45 switch and connection devices and appropriate PVC and aluminium covers of the Rapid 45 series. The fitting can be completed with fitting covers in the "Swing", "Soft" or "Style" design. The GAD OTA cover adapters are essential. A GAD OTD spacer must be placed between the trunking covers.




Internal corner cover, Swing

Type	Surface Colour finish		Pack. pcs	Weight kg/100 pcs.	Item No.
	Surface	Colour finish			
OT I Swing EL	—	Anodised	1	45.500	6115875
Alu	Aluminium				
EL	Anodised				

Trunking cover for the internal corner of the design device installation trunking of the GAD series. "Swing" design version for complete coverage of the system opening and the switching and plug-in devices.




Internal corner cover, Soft



Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
OT I Soft EL	Anodised	1	46.200	6115885
Alu	Aluminium			
EL	Anodised			

Trunking cover for the internal corner of the design device installation trunking of the GAD series. "Soft" design version for complete coverage of the system opening and the switching and plug-in devices.


Internal corner cover, Style



Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
OT I Style EL	Anodised	1	45.500	6115895
Alu	Aluminium			
EL	Anodised			

Trunking cover for the internal corner of the design device installation trunking of the GAD series. "Style" design version for complete coverage of the system opening and the switching and plug-in devices.


End piece, Swing, left



Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD EL Swing EL	Anodised	1	16.100	6115915
Alu	Aluminium			
EL	Anodised			

End piece for design device installation trunking of the GAD series. "Swing" design version. The end piece can only be used for closing on the left side.


End piece, Swing, right



Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD ER Swing EL	Anodised	1	16.100	6115925
Alu	Aluminium			
EL	Anodised			

End piece for design device installation trunking of the GAD series. "Swing" design version. The end piece can only be used for closing on the right side.


End piece, Soft, left



Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD EL Soft EL	Anodised	1	15.600	6115935
Alu	Aluminium			
EL	Anodised			

End piece for design device installation trunking of the GAD series. "Soft" design version. The end piece can only be used for closing on the left side.

End piece, Soft, right




Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD ER Soft EL	Anodised	1	15.600	6115945
Alu	Aluminium			
EL	Anodised			

End piece for design device installation trunking of the GAD series. "Soft" design version. The end piece can only be used for closing on the right side.

End piece, Style, left

Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD EL Style EL	Anodised	1	16.200	6115955
Alu	Aluminium			
EL	Anodised			


End piece for design device installation trunking of the GAD series. "Style" design version. The end piece can only be used for closing on the left side.



End piece, Style, right

Type	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD ER Style EL	Anodised	1	16.200	6115965
Alu	Aluminium			
EL	Anodised			


End piece for design device installation trunking of the GAD series. "Style" design version. The end piece can only be used for closing on the right side.



Cover adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD OTA	Graphite black	5	0.626	6115975
PA	Polyamide			


Cover adapter for mounting on trunking bases and fittings of the GAD and Rapid IBIS design device installation trunking series. The cover adapter can be pushed into a guide on the base and is used to accept the trunking cover and keep it at the desired spacing. It is also used for bundled cable exits and can be moved into the lengthwise direction. A maximum spacing of 500 mm between the cover adapters must be maintained.



Spacer

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD OTD RW	Pure white	10	0.008	6115980
GAD OTD LGR	Light grey	10	0.008	6115982
GAD OTD SW	Graphite black	10	0.008	6115985
PA	Polyamide			


Spacer for insertion between the trunking covers of the GAD design device installation trunking series. The spacer ensures secure maintenance of a minimum spacing between trunking covers.



Stabiliser plate

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GAD SB	Electrogalvanised	—	—	10	2.000	6115995
St	Steel					

Stabiliser plate for the stabilisation of the system opening of the GAD design device installation trunking series. The panel is placed in the trunking base and supports the acceptance of covers and ensures a secure hold of the devices.





Protective conductor connection bracket


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electrogalvanised	—	—	10	0.610	6288704
St	Steel					
G	Electrogalvanised					

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²



Partition



Type	Colour	Length mm	Pack. Weight		Item No.
			m	kg/100 m	
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.












05_LFS...Produkteheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLExpordt_02233) / 2018/10/15 10:55:22 10:55:22

Device installation trunking accessories

	Covers for backlight	274
	Fastening panels and mounting accessories	274
	Wall cover	277
	Noise insulation	281



Trunking cover Rapid 80, PC, clear, fluted inside




Type	Colour	Width mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKKPI	Transparent	76.5	16	21.800	6278790

PC Polycarbonate

Trunking cover for closing Rapid 80 GK (PVC), GS (steel) and GA (aluminium) device installation trunking as well as ISS service poles with a 76.5 mm system opening. The GK-OTKKP cover is made from clear, transparent plastic and the inside is fluted (longitudinal) and is therefore suitable for integrating lighting in the trunking and service pole. The delivered length is mm.

Cover Rapid 80, opal, smooth




Type	Colour	Width mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGO	Transparent	76.5	16	21.800	6278690

PC Polycarbonate

Trunking cover for closing Rapid 80 GK (PVC), GS (steel) and GA (aluminium) device installation trunking as well as ISS service poles with a 76.5 mm system opening. The GK-OTGO cover is made from translucent but milky plastic (looking like cut glass) and is therefore suitable for integrating lighting in the trunking or service poles. The delivered length is mm.

Fastening panels




Type	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
BKN50 80	53–83 mm	1	50.000	6288001
BKN75 125	78–127 mm	1	57.000	6288003
BKN120 205	120–205 mm	1	68.000	6288005
BKN200 350	198–351 mm	1	89.000	6288007

- St** Steel
- FS** Strip-galvanised

Fastening panel for mounting device installation trunking on skirting board construction and as a support for the convection grid. The fixing panel can be used for all device installation trunking systems with 80 mm and 110 mm system openings; GEK-S, GEK-A and GEK-K in conjunction with a wall panel adapter.

Wall panel adapter for GK, trunking width 110 mm




Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70110	70x110 mm	1	22.000	6279802

- St** Steel
- FS** Strip-galvanised

Wall panel adapter for mounting the GK70110 device installation trunking on wall panels.

Wall panel adapter for GK, trunking width 130 mm




Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70130	70x130 mm	1	26.100	6279804

- St** Steel
- FS** Strip-galvanised

Wall panel adapter for mounting the GK70130 device installation trunking on wall panels.

Wall panel adapter for GK, trunking width 170 mm



Type	For trunking dimensions	Pack. pcs	Weight kg/100 pcs.	Item No.
KS70170	70x170 mm	1	34.300	6279806

- St** Steel
- FS** Strip-galvanised

Wall panel adapter for mounting the GK70170 device installation trunking on wall panels.




Connection profile for trunking width 170 mm

Type	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSP170	152	1	23.500	6279810

- St Steel
- FS Strip-galvanised

Stabilisation profile for panel mounting of device installation trunking of nominal height 170 mm.




Connection profile for trunking width 210 mm

Type	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
KSP210	192	1	31.900	6279812

- St Steel
- FS Strip-galvanised

Stabilisation profile for panel mounting of device installation trunking of nominal height 210 mm.




Profile connector, horizontal

Type	Length mm	Number of profiles	Pack. pcs	Weight kg/100 pcs.	Item No.
PV N3 50H	50	2	1	0.730	6288100
PV N3 75H	75	3	1	1.080	6288102
PV N3 100H	100	4	1	1.430	6288104
PV N3 125H	125	5	1	1.739	6288106
PV N3 150H	150	6	1	2.130	6288108
PV N3 175H	175	7	1	2.470	6288110
PV N3 200H	200	8	1	2.785	6288112
PV N3 225H	225	9	1	3.109	6288114
PV N3 250H	250	10	1	3.382	6288116
PV N3 275H	275	11	1	3.776	6288118
PV N3 300H	300	12	1	4.150	6288120

- PP Polypropylene

Horizontal profile connector with guide slits to lock convection grid profiles. The profile connector is mounted on the fastening panel using the clamp, type SP3.




Clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
SP3	10	0.260	6279800

- St Steel
- FS Strip-galvanised

Clamp to lock supports between the convection grid and the fixing panel.




Mounting and connection profile for convection grids, trunking height 70 mm


Type	For trunking dimensions	Dimension h mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKG70130	70 x 130	110	68	1	38.000	6279820
MVKG70170	70 x 170	150	68	1	49.000	6279822
MVKG70210	70 x 210	190	68	1	50.000	6279824

- St Steel
- FS Strip-galvanised

Mounting and connection profile for panel mounting of device installation trunking in conjunction with vertical convection grids. The installation and connection profile is locked onto the fixing panel and accepts the profile connector, type PVV/N2... vertically. Please observe the trunking dimensions.



Mounting and connection profile for convection grids, trunking height 90 mm




Type	For trunking dimensions	Dimension h mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MVKG90130	90 x 130	110	88	1	44.000	6279826
MVKG90170	90 x 170	150	88	1	50.000	6279828
MVKG90210	90 x 210	190	88	1	63.100	6279830

St Steel

FS Strip-galvanised

Mounting and connection profile for panel mounting of device installation trunking in conjunction with vertical convection grids. The installation and connection profile is locked onto the fixing panel and accepts the profile connector, type PVV/N2... vertically. Please observe the trunking dimensions.


Profile connector, vertical



Type	Length mm	Number of profiles	Pack. pcs	Weight kg/100 pcs.	Item No.
PVV N2 100	100	4	1	6.000	6288030
PVV N2 125	125	5	1	7.500	6288032
PVV N2 150	150	6	1	9.000	6288034
PVV N2 475	475	19	1	28.500	6288044
PVV N2 500	500	20	1	29.600	6288084
PVV N2 600	600	24	1	36.000	6288050
PVV N2 625	625	25	1	37.500	6288052
PVV N2 700	700	28	1	43.000	6288058
PVV N2 800	800	32	1	51.200	6288090
PVV N2 875	875	35	1	52.500	6288066

Vertical profile connector with guide slits to lock convection grid profiles for the creation of a compact grid unit. The vertical convection grids can run some way down the front side of the trunking, although a gap should be left near the floor for cleaning, or should be run to the floor and fastened with the BVL floor panel. This version represents a variant of the connector panelling. Alternatively to the convection grid profiles, heating convector panelling can also be created with closed sheet steel panelling.


Floor bracket



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
BVL	1	6.000	6288180

The BVL floor holder is used to fasten vertical profile connectors of type PVV/N2... on the floor.

Convection grid profile



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
KG2RW	Pure white	—	2000	40	23.100	6287700
KG2CW	Cream	—	2000	40	23.100	6287701
KG2LGR	Light grey	—	2000	40	23.100	6287702
KG2RW	Pure white	—	3000	60	23.100	6287710
KG2CW	Cream	—	3000	60	23.100	6287711
KG2LGR	Light grey	—	3000	60	23.100	6287712
KG2EL	—	Anodised	3000	60	21.900	6287723
KG2EL	—	Anodised	2000	40	21.900	6287733

Alu Aluminium

EL Anodised

Sloping convection grid, for optically attractive closing of spaces between the device installation trunking and the wall. The convection grid profiles are suitable for horizontal and vertical mounting.

Coupling pins

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
8VS4	100	0.740	6287810

Coupling pin to connect convection grid profiles.




PVC wall cover, open, 70110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70110RW	Pure white	178	104	1	6.300	6274810
G-KWAO70110CW	Cream	178	104	1	6.300	6274811
G-KWAO70110LGR	Light grey	178	104	1	6.300	6274812

ABS/ASA Acrylonitrile butadiene styrene

Wall cover, open, to close wall penetrations during wall mounting.




PVC wall cover, open, 90110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90110RW	Pure white	178	124	1	7.100	6274910

ABS/ASA Acrylonitrile butadiene styrene

Wall cover, open, to close wall penetrations during wall mounting.




PVC wall cover, open, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70130RW	Pure white	198	104	1	6.500	6274820
G-KWAO70130CW	Cream	198	104	1	6.500	6274821

ABS/ASA Acrylonitrile butadiene styrene

Wall cover, open, to close wall penetrations during wall mounting.




PVC wall cover, open, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90130RW	Pure white	198	124	1	7.300	6274920

ABS/ASA Acrylonitrile butadiene styrene

Wall cover, open, to close wall penetrations during wall mounting.




PVC wall cover, open, 70170


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70170RW	Pure white	238	104	1	7.100	6274830
G-KWAO70170CW	Cream	238	104	1	7.100	6274831
G-KWAO70170LGR	Light grey	238	104	1	7.100	6274832

ABS/ASA Acrylonitrile butadiene styrene

Wall cover, open, to close wall penetrations during wall mounting.




PVC wall cover, open, 90170



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90170RW	Pure white	238	124	1	7.500	6274930
ABS/ASA Acrylonitrile butadiene styrene						

Wall cover, open, to close wall penetrations during wall mounting.


PVC wall cover, open, 70210



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO70210RW	Pure white	278	104	1	7.500	6274840
ABS/ASA Acrylonitrile butadiene styrene						

Wall cover, open, to close wall penetrations during wall mounting.


PVC wall cover, open, 90210



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAO90210RW	Pure white	278	124	1	7.800	6274940
ABS/ASA Acrylonitrile butadiene styrene						

Wall cover, open, to close wall penetrations during wall mounting.


PVC wall cover, closed, 70170



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70170RW	Pure white	238	138	1	10.400	6274870
ABS/ASA Acrylonitrile butadiene styrene						

Wall cover, closed, to close wall penetrations during panel mounting.


PVC wall cover, closed, 70210



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-KWAG70210RW	Pure white	278	138	1	11.400	6274880
ABS/ASA Acrylonitrile butadiene styrene						

Wall cover, closed, to close wall penetrations during panel mounting.

Aluminium wall cover, open, 70110



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70110RW	Pure white	178	104	1	10.300	6278800
G-AWAO70110CW	Cream	178	104	1	10.300	6278801
G-AWAO70110LGR	Light grey	178	104	1	10.300	6278802
Alu Aluminium						

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 90110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90110RW	Pure white	178	124	1	11.600	6278880
G-AWAO90110CW	Cream	178	124	1	11.600	6278881
G-AWAO90110LGR	Light grey	178	124	1	11.600	6278882

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 70130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70130RW	Pure white	198	104	1	10.900	6278810
G-AWAO70130CW	Cream	198	104	1	10.900	6278811
G-AWAO70130LGR	Light grey	198	104	1	10.900	6278812

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 90130

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90130RW	Pure white	198	124	1	12.300	6278890
G-AWAO90130CW	Cream	198	124	1	12.300	6278891
G-AWAO90130LGR	Light grey	198	124	1	12.300	6278892

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70170RW	Pure white	238	104	1	12.300	6278820
G-AWAO70170CW	Cream	238	104	1	12.300	6278821
G-AWAO70170LGR	Light grey	238	104	1	12.300	6278822

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90170RW	Pure white	238	124	1	13.600	6279000
G-AWAO90170CW	Cream	238	124	1	13.600	6279001
G-AWAO90170LGR	Light grey	238	124	1	13.600	6279002

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.




Aluminium wall cover, open, 70210


Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO70210RW	Pure white	278	104	1	13.600	6278830
G-AWAO70210LGR	Light grey	278	104	1	13.600	6278832
G-AWAO70210CW	Cream	278	104	1	13.600	6278831

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.



Aluminium wall cover, open, 90210




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAO90210RW	Pure white	278	124	1	14.900	6279010
G-AWAO90210CW	Cream	278	124	1	14.900	6279011
G-AWAO90210LGR	Light grey	278	124	1	14.900	6279012

Alu Aluminium

Wall cover, open, to close wall penetrations during wall mounting.

Aluminium wall cover, closed, 70110




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70110RW	Pure white	178	138	1	16.000	6278840
G-AWAG70110CW	Cream	178	138	1	16.000	6278841
G-AWAG70110LGR	Light grey	178	138	1	16.000	6278842

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.

Aluminium wall cover, closed, 90110




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90110RW	Pure white	178	158	1	17.400	6279020
G-AWAG90110CW	Cream	178	158	1	17.400	6279021
G-AWAG90110LGR	Light grey	178	158	1	17.400	6279022

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.

Aluminium wall cover, closed, 70130




Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70130RW	Pure white	198	138	1	17.300	6278850
G-AWAG70130CW	Cream	198	138	1	17.300	6278851
G-AWAG70130LGR	Light grey	198	138	1	17.300	6278852

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.

Aluminium wall cover, closed, 90130



Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90130RW	Pure white	198	158	1	18.700	6279030
G-AWAG90130CW	Cream	198	158	1	18.700	6279031
G-AWAG90130LGR	Light grey	198	158	1	18.700	6279032

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.




Aluminium wall cover, closed, 70170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70170RW	Pure white	238	138	1	20.000	6278860
G-AWAG70170CW	Cream	238	138	1	20.000	6278861
G-AWAG70170LGR	Light grey	238	138	1	20.000	6278862

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.




Aluminium wall cover, closed, 90170

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90170RW	Pure white	238	158	1	21.300	6279040
G-AWAG90170CW	Cream	238	158	1	21.300	6279041
G-AWAG90170LGR	Light grey	238	158	1	21.300	6279042

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.




Aluminium wall cover, closed, 70210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70210RW	Pure white	278	138	1	22.600	6278870
G-AWAG70210CW	Cream	278	138	1	22.600	6278871
G-AWAG70210LGR	Light grey	278	138	1	22.600	6278872

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.




Aluminium wall cover, closed, 90210

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG90210RW	Pure white	278	158	1	23.900	6279050
G-AWAG90210CW	Cream	278	158	1	23.900	6279051
G-AWAG90210LGR	Light grey	278	158	1	23.900	6279052

Alu Aluminium


Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.



Noise limit barrier

Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
7LSB	300	15	3.867	6288650


The noise limit barrier is used to reduce the transmission of airborne noise, e.g. when the trunking system is run through a wall between two offices. The noise limit barrier is made of glass wool, which, when delivered, has a diameter of approx. 30 mm and a length of approx. 300 mm. The material need not be greatly compressed during mounting.




Noise limit barrier, sold by the metre







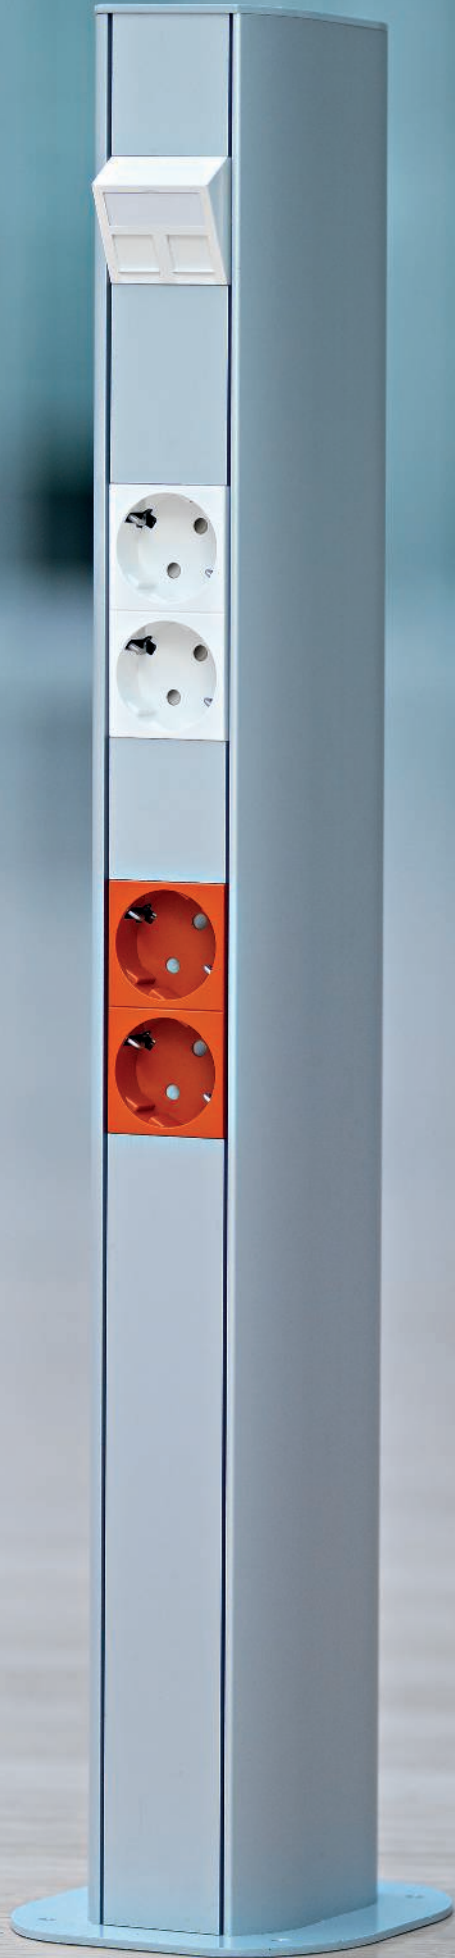
Type	Pack. m	Weight kg/100 m	Item No.
7LSB M	50	10.500	6288651

The noise limit barrier is used to reduce the transmission of airborne noise, e.g. when the trunking system is run through a wall between two offices. The noise limit barrier is made of glass wool, which, when delivered, has a diameter of approx. 30 mm. The goods sold by the metre are delivered in a box, the length of the material is 50 m. The material need not be greatly compressed during mounting.







ISS service pole systems

	Floor-ceiling service pole, steel	284
	Floor-ceiling service pole, aluminium	286
	Service pole, industry	312
	ISS floor-ceiling service pole accessories	316
	Floor service pole, steel	318
	Floor service pole, aluminium	319
	Device installation	322

Service pole, sheet steel, with sheet steel cover

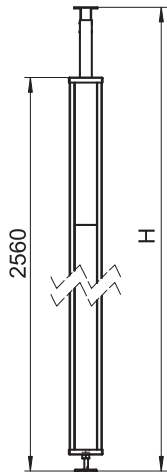

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS70110STRW	Pure white	1	1,121.000	6286530

St Steel

Sheet steel service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 2,800 – 3,700 mm

1 ceiling fastening with telescopic profile

1 sheet steel cover

Length: 2,500 mm

A 2 m PVC separating retainer and two cover clips are contained in the scope of delivery.

The service pole is suitable for accepting accessory mounting boxes of the series 71GD....

The service pole is pre-mounted and ready for use immediately. The following accessories can also be used, depending on the mounting situation.

Service pole, sheet steel, with PVC cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS70110STKRW	Pure white	1	1,100.000	6286540

St Steel

Sheet steel service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 2,800 – 3,700 mm

1 ceiling fastening with telescopic profile



1 PVC cover

Length: 2,500 mm

A 2 m PVC separating retainer and two cover clips are contained in the scope of delivery.

The service pole is suitable for accepting accessory mounting boxes of the series 71GD....

The service pole is pre-mounted and ready for use immediately. The following accessories can also be used, depending on the mounting situation.

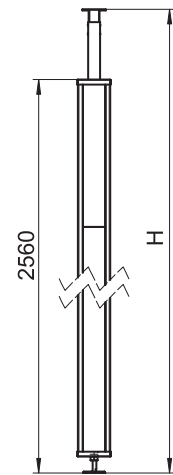


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS98B	Pure white	1	13.000	6286800

St Steel

Cover screen to laminate the ceiling plate cut-out in the gland area of the ISS70110ST service pole.

Cover screen




Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS98KF	1	24.500	6286802

St Steel


FS Strip-galvanised

Clamp fastening to fasten the telescopic profile of the ISS70110ST service pole to the support rails of false or suspended ceilings.

Clamp fastening



Service pole, type ISST70140



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISST70140EL	—	Anodised	3300	1	820.000	6288933
ISST70140RW	Pure white	—	3300	1	820.000	6288930

Alu Aluminium

EL Anodised

ISS twin aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment column with clamping attachment

Total length: 3,315–3,480 mm

1 single-compartment pole with clamping device

1 trunking installation profile

Length 1,000 mm


1 aluminium cover

Length: 1,000 mm

The area for device installation is suitable for accepting front-locking accessory mounting boxes of the series 71GD...

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.

Floor plate for ISSOG70140




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP70140RW	Pure white	1	18.500	6290120
ISSBP70140WA	White aluminium	1	18.500	6290124

St Steel

FSK Strip galvanised/plastic-coated

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for mounting service poles of type ISST70140, ISSOG70140 and ISST70140B.

Adapter stabiliser for ISST70140



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSZ70140	Pure white	1	8.000	6290160

St Steel

FSK Strip galvanised/plastic-coated

Adapter stabiliser for additional stiffening of the twin profiles. Suitable for mounting on the service poles of type ISST70140 and ISST70140B.



Fastening bracket for ISST70140

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
ISSBW70140RW	Pure white	1	8.500		6290150

St Steel

FSK Strip galvanised/plastic-coated

Fixing bracket for wall fastening of the twin service pole. Suitable for installation on the service poles of type ISST70140 and ISST70140B.




Rubber support for ISSOG70140

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
ISSGU70140	Black	1	5.000		6290174

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.




Ceiling panel for ISST70140


Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
WAG70140TRW	Pure white	1	28.600		6290200

St Steel

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service poles, type ISST70140 and ISST70140B.



Service pole, type ISST70140B



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISST70140BEL	—	Anodised	3300	1	860.000	6290013
ISST70140BRW	Pure white	—	3300	1	860.000	6290010

Alu Aluminium

EL Anodised

ISS twin aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment column with clamp fastening

Total length: 3,315 mm – 3,480 mm

1 fastening option for lighting

1 ceiling fastening with clamping device

1 trunking installation profile

Length: 1,000 mm


1 aluminium cover

Length: 1,000 mm

The area for device installation is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The panel to fasten luminaires is attached at a height of 1,850 mm and its own height is 148 mm. It is possible to create various kinds of workplace or general room lighting using the standard wall brackets from lighting manufacturers.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.

Floor plate for ISSOG70140




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP70140RW	Pure white	1	18.500	6290120
ISSBP70140WA	White aluminium	1	18.500	6290124

St Steel

FSK Strip galvanised/plastic-coated

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for mounting service poles of type ISST70140, ISSOG70140 and ISST70140B.

Adapter stabiliser for ISST70140



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSZ70140	Pure white	1	8.000	6290160

St Steel

FSK Strip galvanised/plastic-coated

Adapter stabiliser for additional stiffening of the twin profiles. Suitable for mounting on the service poles of type ISST70140 and ISST70140B.



Fastening bracket for ISST70140

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
ISSBW70140RW	Pure white	1	8.500		6290150

St Steel

FSK Strip galvanised/plastic-coated

Fixing bracket for wall fastening of the twin service pole. Suitable for installation on the service poles of type ISST70140 and ISST70140B.




Rubber support for ISSOG70140

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
ISSGU70140	Black	1	5.000		6290174

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.




Ceiling panel for ISST70140


Type	Colour	Pack. pcs	Weight		Item No.
			kg/100 pcs.	pcs.	
WAG70140TRW	Pure white	1	28.600		6290200

St Steel

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service poles, type ISST70140 and ISST70140B.



Service pole, type ISSOG70140

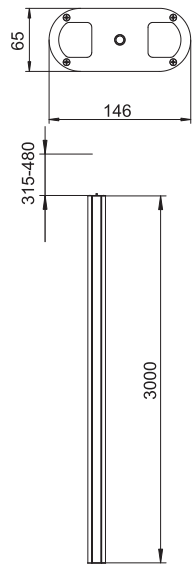

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSOG70140EL	—	Anodised	3300	1	700.000	6289088
ISSOG70140RW	Pure white	—	3300	1	700.000	6289090

Alu Aluminium

EL Anodised

ISS service pole, oval shape, aluminium, with a 76.5 mm system opening.

Set consists of:

1 single-compartment column with clamping attachment

Total length: 3,315–3,480 mm

1 single-compartment pole with clamping device

1 trunking installation profile

Length 3,000 mm


1 aluminium cover

Length: 3,000 mm

The area for device installation is suitable for accepting front-locking accessory mounting boxes of the series 71GD...

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.

Floor plate for ISSOG70140




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP70140WA	White aluminium	1	18.500	6290124
ISSBP70140RW	Pure white	1	18.500	6290120

St Steel

FSK Strip galvanised/plastic-coated

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for mounting service poles of type ISST70140, ISSOG70140 and ISST70140B.

Rubber support for ISSOG70140



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU70140	Black	1	5.000	6290174

GUM Rubber


Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing the service poles of type ISST70140, ISSO70140 and ISST70140B.

Ceiling rosette for ISSOG70140


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAG701400	Pure white	1	23,400	6290260

St Steel

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISSO70140.



Service pole, type ISS70110



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS70110EL	—	Anodised	3300	1	750.000	6288943
ISS70110RW	Pure white	—	3300	1	750.000	6288940

Alu Aluminium

EL Anodised

ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 single-compartment pole with clamping fastening

Total length 3,315–3,480 mm

1 ceiling attachment with clamp


1 aluminium cover

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288256), and installation of a cover clip, type KL80A (6288640), are possible.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.

Floor plate for ISS70110




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP70110RW	Pure white	1	44.600	6290100
ISSBP70110WA	White aluminium	1	16.300	6290104

St Steel

FSK Strip galvanised/plastic-coated

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISS70110.

Rubber support for ISS70110



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU70110	Black	1	5.000	6290170

GUM Rubber


Rubber support for slip-free fixing of the floor-ceiling service pole. The rubber support is suitable for installing on the service poles of type ISS70110.

Aluminium wall cover, closed, 70110

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
G-AWAG70110RW	Pure white	178	138	1	16.000	6278840

Alu Aluminium

Wall cover, closed, to close wall penetrations during panel mounting. In the respective dimensions, it is also suitable as a ceiling cover for ISS service poles.




Partition for ISS140110

Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-TW70	—	2000	—	2	51.500	6279711


St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.



Service pole, type ISS140110

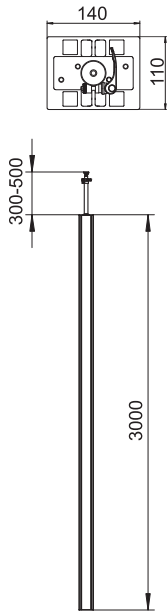

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140110EL	—	Anodised	3300	1	1,710.000	6288963
ISS140110RW	Pure white	—	3300	1	1,370.000	6288960

Alu Aluminium

EL Anodised

ISS aluminium service pole with a 76.5 mm system opening.

Set consists of:

1 two-compartment pole with clamping fastening

Total length 3,315–3,480 mm

1 ceiling attachment with clamp


2 aluminium covers

Length: 3,000 mm

The service pole is suitable for accepting front-locking accessory mounting boxes of the series 71GD... Optionally, a partition, type TW (6288256), and mounting of a cover clip, type KL80A (6288640), are possible.

The service pole is pre-mounted and ready for use immediately. The following accessories can be used, depending on the mounting situation.

Floor plate for ISS140110




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP140110RW	Pure white	1	64.600	6290130
ISSBP140110WA	White aluminium	1	64.600	6290134

St Steel

FSK Strip galvanised/plastic-coated

Floor plate with 30 mm visible edge and four fastening holes Ø 8.5 mm. The floor plate is suitable for installation the service poles of type ISS140110.

Rubber support for ISS140110



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU140110	Black	1	9.000	6290176

GUM Rubber


Rubber support for slip-free fastening of the floor-ceiling service pole. The rubber support is suitable for installing on the service poles of type ISS140110.

Ceiling panel for ISS140110

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

Alu Aluminium

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole, type ISS140110.




Partition for ISS140110


Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.

St Steel

Partition to divide the Rapid 80 GA, Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels. For vertical mounting of device installation trunking and the installation of ISS service poles, the duct clamps, type KL80A, are required for secure fixing of the partition.



Service pole, type ISSRM45



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRM45EL	—	Anodised	3300	1	510.000	6290087
ISSRM45RW	Pure white	—	3300	1	510.000	6290086

Alu Aluminium

EL Anodised

ISS aluminium service pole with a 45 mm system opening.

Set consists of:

1 one-compartment pole with clamping fastening

Total length: 3,315 - 3,480 mm


1 ceiling attachment with clamping device

1 aluminium cover

Length 3,000 mm

The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.

Rubber support for ISSRM45




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRGU	Black	1	1.450	6290178

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole ISSRM45.

Ceiling panel for ISSRM45



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAGRM45	Pure white	1	12.900	6290264

St Steel


Closed ceiling rosette for tidy closure of the ceiling gland of the service poles, type ISSRM45.

Partition



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.



Service pole, type ISSRM45F

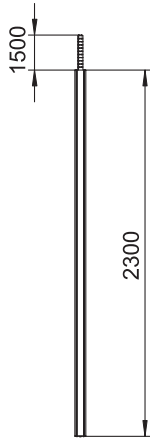

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRM45FRW	Pure white	—	2300	1	380.000	6290095
ISSRM45FEL	—	Anodised	2300	1	380.000	6290097

Alu Aluminium

EL Anodised

ISS aluminium service pole with a flexible hose to the ceiling and a 45 mm system opening.

Set consists of:

1 one-compartment pole with flexible hose to ceiling

Total length: 2,300 mm

1 flexible hose, length: 1,500 mm


1 aluminium cover

Length: 2,300 mm

The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.

The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see items below).

Floor plate for ISS110100F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SFISSFRW	Pure white	1	600.000	6290196
SFISSFWAL	White aluminium	1	600.000	6290197

St Steel

Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.

Hose connection for ISS110100F



Type	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SAISSF	80	1	35.100	6290198

St Steel

VZ Galvanised


Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.

Ceiling panel for ISS110100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DAB-F RW	Pure white	1	20.700	6290269

St Steel

Ceiling rosette for tidy closure of the penetration of the flexible hose in the ceiling.




Partition


Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.



Service pole, type ISS110100R



Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS110100REL	—	Anodised	780	3000	1	1,000.000	6289063
ISS110100RRW	Pure white	—	780	3000	1	1,000.000	6289060

Alu Aluminium

EL Anodised


ISS aluminium service pole with a thin tube to the ceiling.

Set consists of:

- 1 single-compartment pole with clamping fastening
Total length 3,315 – 3,480 mm
- 1 clamping device for clamping to the ceiling
- 1 equippable aluminium installation area
Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD...

Ceiling panel for ISS110100R




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAG140100RRW	Pure white	1	14.000	6290290

St Steel

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole ISS110100R and ISS140100R.

Floor plate for ISS110100



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP110100RW	Pure white	1	43.600	6290330
ISSBP110100WA	White aluminium	1	43.600	6290331



St Steel

Floor plate to fasten the ISS110100 on the floor. The floor plate with a visible edge has four fastening holes Ø 8.5 mm.


Rubber support for ISS110100R

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU110100	Black	1	4.500	6290358
GUM Rubber				

Rubber support for slip-free fastening of the floor-ceiling service pole, type ISS110100.



Service pole, type ISS110100F

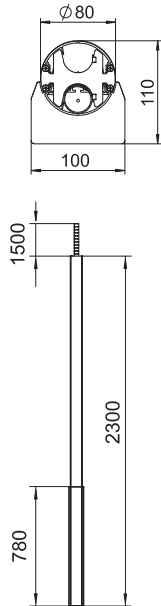

Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Dimension C mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS110100FRW	Pure white	—	780	2300	1500	1	790.000	6289040
ISS110100FEL	—	Anodised	780	2300	1500	1	790.000	6289043

Alu Aluminium

EL Anodised

ISS aluminium service pole with a flexible hose to the ceiling.

Set consists of:

1 single-compartment pole with flexible hose to the ceiling

Total length: 2,300 mm


1 flexible hose, length: 1,500 mm

1 equippable aluminium installation compartment

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see items below).

Floor plate for ISS110100F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SFISSFRW	Pure white	1	600.000	6290196
SFISSFWAL	White aluminium	1	600.000	6290197

St Steel

Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.

Hose connection for ISS110100F



Type	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SAISSF	80	1	35.100	6290198

St Steel


VZ Galvanised

Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.


Ceiling panel for ISS110100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DAB-F RW	Pure white	1	20.700	6290269
St	Steel			

Ceiling rosette for tidy closure of the penetration of the flexible hose in the ceiling.



Service pole, type ISS140100R



Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140100REL	—	Anodised	780	3000	1	1,390.000	6289073
ISS140100RRW	Pure white	—	780	3000	1	1,390.000	6289070

Alu Aluminium

EL Anodised

ISS aluminium service pole with a thin tube to the ceiling.

Set consists of:

1 two-compartment pole with clamping fastening

Total length 3,315–3,480 mm


1 ceiling attachment with clamp

1 aluminium cover

Length: 780 mm

In areas for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD...

Ceiling panel for ISS110100R




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAG140100RRW	Pure white	1	14.000	6290290

St Steel

Ceiling rosette for tidy closure of the pole penetration in the ceiling. Suitable for service pole ISS110100R and ISS140100R.

Floor plate for ISS140100R



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBP140100RW	Pure white	1	57.200	6290336
ISSBP140100WA	White aluminium	1	57.200	6290337



St Steel

Floor plate to fasten the ISS140100 on the floor. The floor plate with a visible edge has four fastening holes Ø 8.5 mm.


Rubber support for ISS140100R

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGU140100	Black	1	6.500	6290362
GUM Rubber				

Rubber support for slip-free fastening of the floor-ceiling service pole, type ISS140100.



Service pole, type ISS140100F

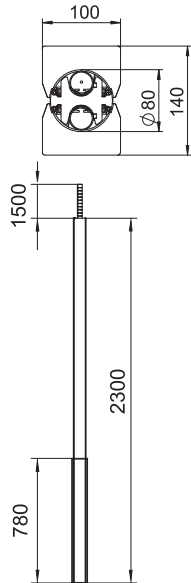

Type	Colour	Surface finish	Dimension A mm	Dimension B mm	Dimension C mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS140100FRW	Pure white	—	780	2300	1500	1	1,100.000	6289050
ISS140100FEL	—	Anodised	780	2300	1500	1	1,100.000	6289053

Alu Aluminium

EL Anodised

ISS aluminium service pole with flexible hose to the ceiling.

Set consists of:

1 double-compartment pole with 2 flexible hoses to the ceiling

Total length of the aluminium profile: 2,300 mm


1 flexible hose, length: 1,500 mm

1 aluminium cover

Length: 780 mm

In the area for device installation, the service pole has a 76.5 mm system opening and is suitable for accepting front-locking accessory mounting boxes of the series 71GD... The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).

Floor plate for ISS110100F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SFISSFRW	Pure white	1	600.000	6290196
SFISSFWAL	White aluminium	1	600.000	6290197

St Steel

Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.

Hose connection for ISS110100F



Type	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SAISSF	80	1	35.100	6290198

St Steel


VZ Galvanised

Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.


Ceiling panel for ISS140100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DAB-2F	Pure white	1	27.100	6290382
St	Steel			

Ceiling rosette for tidy closure of the penetration of the flexible hoses in the ceiling.



Service pole, type ISSDM45



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDM45EL	—	Anodised	3300	1	1,172.000	6289972
ISSDM45RW	Pure white	—	3300	1	1,172.000	6289970

Alu Aluminium

EL Anodised

ISS aluminium service pole with a 45 mm system opening.

Set consists of:

1 two-compartment pole with clamping fastening


Total length: 3,315 - 3,480 mm

1 ceiling attachment with clamp

2 aluminium covers, length 3,000 mm

The clamp which is attached to the top of the ISS service pole can be variably adjusted from 300 to 500 mm. Possible colour options are aluminium anodised or pure white. The pole is based on a slender, oval aluminium profile. There are two 45 mm system openings on opposite sides for direct installation of Module 45 devices.

Rubber support for ISSDM45R




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGUDM45	Black	1	4.600	6290372

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole, type ISSDM45.

Ceiling panel for ISSDM45R



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAGDM45	Pure white	1	46.800	6290387

St Steel


Ceiling rosette for tidy closure of the pole penetration, type ISSDM45, in the ceiling.

Floor plate for ISSDM45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBPDM45RW	Pure white	1	39.000	6290347
ISSBPDM45WA	White aluminium	1	39.000	6290348

St Steel

Floor plate with 30 mm visible edge and four fixing holes Ø 8.5 mm.




Partition



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2000	60	13.500	6023096

PVC Polyvinylchloride

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.



Service pole, type ISSDM45F



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDM45FRW	Pure white	—	2300	1	871.000	6289974
ISSDM45FEL	—	Anodised	2300	1	871.000	6289976

Alu Aluminium

EL Anodised


ISS aluminium service pole with a 45 mm system opening.

Set consists of:

- 1 two-compartment pole with two flexible hoses to the ceiling
Total length of the aluminium profile: 2,300 mm
- 2 aluminium covers, length 2,300 mm

Colour options are pure white or aluminium anodised. There are two 45 mm system openings on opposite sides for direct installation of Module 45 devices. The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).

Floor plate for ISS110100F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SFISSFRW	Pure white	1	600.000	6290196
SFISSFWAL	White aluminium	1	600.000	6290197

St Steel

Floor plate as stand for service poles with hose to ceiling, type ISS110100F, 140100F and ISSRM45F.

Hose connection for ISS110100F



Type	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SAISSF	80	1	35.100	6290198

St Steel


VZ Galvanised

Hose connection as ceiling attachment for service poles with hose to ceiling, type ISS110100F and 140100F.

Ceiling panel for ISS140100F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DAB-2F	Pure white	1	27.100	6290382
St Steel				


Ceiling rosette for tidy closure of the penetration of the flexible hoses in the ceiling.




Partition

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 40	Light grey	2000	60	13.500	6023096
PVC Polyvinylchloride					

Partition to divide the WDK trunking, with 40 mm trunking height, and various ISS service poles for the installation of different voltage levels.




Industrial pole profile, type ISS160160IP4



Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160IP4 EL	Anodised	4000	1	4,055.000	6290404
Alu	Aluminium				
EL	Anodised				

ISS service pole for the equipment of assembly workstations in production sites. The anodised heavy-duty aluminium profile has a 76.5 mm system opening on two opposite sides for accepting front-locking mounting accessory boxes of the series 71GD or mounting supports of the series 71MT. All four sides of the profile have a mounting groove in the standard nominal size 8 for installing various expansion parts for additional functions (Building Kit Systems). The scope of delivery comprises the pole profile as well as the necessary covers for the system openings in 2,000 mm lengths and a PE bag with 20 additional locking brackets, type RKV3V, to enable you to create partial lengths of the covers. Two closed trunking channels inside the profile are ideal for conduction of compressed air.



Trunking cover 80 mm



Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTEL	—	Anodised	2000	2	38.300	6279723
Alu	Aluminium					
EL	Anodised					

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

Locking bracket for covers, 80 mm system opening



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700
St	Steel					

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.


Industrial service pole, type ISS160160IP6

Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160IP6 EL	Anodised	6000	1	6,020.000	6290406

Alu Aluminium

EL Anodised

ISS service pole for the equipment of assembly workstations in production sites. The anodised heavy-duty aluminium profile has a 76.5 mm system opening on two opposite sides for accepting front-locking mounting accessory boxes of the series 71GD or mounting supports of the series 71MT. All four sides of the profile have a mounting groove in the standard nominal size 8 for installing various expansion parts for additional functions (Building Kit Systems). The scope of delivery comprises the pole profile as well as the necessary covers for the system openings in 2,000 mm lengths and a PE bag with 20 additional locking brackets, type RKV3V, to enable you to create partial lengths of the covers. Two closed trunking channels inside the profile are ideal for conduction of compressed air.




Ceiling fastening for service poles

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160DB WA	White aluminium	403	1	443.600	6290436

St Steel

Ceiling fastening for fixing the ISS service pole to the ceiling. The scope of delivery comprises of two U-shaped profiles made from 3 mm sheet steel, the fastening plate for the ceiling and the required installation accessories, including the groove rail. The ceiling fastening can be height-adjusted on the pole profile.





Floor plate for industrial pole


Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160BP	White aluminium	250	1	382.000	6290416

St Steel

Plate to fasten the ISS industrial pole to the floor. The scope of delivery comprises of four fastening screws to mount the floor plate onto the pole profile and two sealing plugs to make the compressed air channels airtight.



Collision guard for industrial pole




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160AS WA	White aluminium	250	1	264.000	6290422

St Steel

Collision guard as mechanical protection of the ISS industrial pole in the bottom area. The scope of delivery comprises of two U-shaped protection profiles made from 3 mm sheet steel and eight fastening screws with slot nuts to install on the pole profile.

Collision guard for industrial pole




Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160AS HRO	Bright red orange	250	1	264.000	6290423

St Steel

Collision guard as mechanical protection of the ISS industrial pole in the bottom area. The scope of delivery comprises of two U-shaped protection profiles made from 3 mm sheet steel and eight fastening screws with slot nuts to install on the pole profile.

Slot nut for industrial pole




Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
NS8 ST	Galvanised	23	10	0.930	6290499

St Steel

VZ Galvanised

Nutenstein mit M8-Gewinde zur Montage von Anbauten und Zubehör an dem ISS-Industriesäulenprofil. Ein Druckstück an der Unterseite ermöglicht den Nutenstein selbsthaltend in die Nut einzuschwenken. Automatische Verdrehungssicherung durch Profilierung an der Oberseite.



Compressed air tap for industrial pole



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160DLA	1	30.000	6290495

Tap to take off compressed air from the ISS industrial pole profile. The compressed air tap has a G 1/2 (ISO 228-1) threaded hole to accept a standard compressed air coupling. The unit can be mounted onto the pole profile using slot nuts and fastening screws. For the creation of an appropriate outlet for the compressed air a drilling template is supplied.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electroalvanised	—	—	10	0.610	6288704


St Steel

G Electroalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²

Partition



Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	6274900

PVC Polyvinylchloride


Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

Adapter plate for bracket mounting


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160APKTS	White aluminium	1	142.000	6290456

Sl Steel

Adapter plate for mounting of a bracket for a cable support system to the ISS industrial service pole. Mounting instructions are included. Please observe the maximum load values. The bracket was tested with the adapter plate on the pole profile. The installation engineer must choose the ideal fastening system to match the substrate.



Accessory mounting box, single




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD6	Iron grey	5	5.600	6288610

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Service outlet, single, Modul 45®




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD8-2		1	5.900	6288569

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Service outlet, double, Modul 45®




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD13		1	11.000	6288583

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Service outlet, triple, Modul 45®




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD9-2		1	11.600	6288579

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Clamping device



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
ISSDV	—	1	70.000	6290189


Clamping device for tensioning the floor-ceiling service poles against the ceiling. The area for height adjustment lies between 313 mm (basis length) and 480 mm.

Draw-in tool

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
HAT30	Blue	1	3.600	6290201

PA Polyamide

Tool for reassignment of the flexible house for service poles of the ...F series.




Protective conductor connection bracket

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
8AWR	Electrogalvanised	—	—	10	0.610	6288704

St Steel
G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.

Clamping area: 2 x 1.5 – 4 mm²




Locking bracket for covers, 80 mm system opening

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RKV3V	—	—	—	20	0.085	6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.



Service pole, type ISSHS4




Type	Colour	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS4 61OT3RW	Pure white	4	1	1,050.000	6286700
ISSHS4 61OT3LGR	Light grey	4	1	1,108.000	6286702

St Steel

ISS sheet steel service pole with a 76.5 mm system opening on four sides. Empty, fittable from all four sides with six standard devices (socket, telephone, etc.) on each side, max. 24 devices. Fastening possible directly on the floor. Accessory mounting boxes to be ordered separately. The service pole is suitable for accepting front locking accessory mounting boxes of the series 71GD....

Protective frame for ISSHS4



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS4SR40	Graphite black	1	69.400	6286810

St Steel

Protective frame for ISSHS4 service pole for mechanical protection of the columns in the foot area.

Service pole, type ISSHS140250

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140250RW	Pure white	—	2	1	175.000	6290020
ISSHS140250EL	—	Anodised	2	1	175.000	6290023

Alu Aluminium

EL Anodised

ISS aluminium service pole, 2-compartment, with a 76.5 mm system opening.
Empty, equippable with standard devices (socket, telephone, etc.), max. 4 devices.
Direct fastening on floor possible. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.



Service pole, type ISSHS140500

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140500RW	Pure white	—	2	1	302.000	6290030
ISSHS140500EL	Aluminium	Anodised	2	1	354.800	6290033

Alu Aluminium

EL Anodised

ISS aluminium service pole, 2-compartment, with a 76.5 mm system opening.
Empty, equippable with standard devices (socket, telephone, etc.), max. 8 devices.
Direct fastening on floor possible. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.



Service pole, type ISSHS140700

Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS140700RW	Pure white	—	2	1	466.000	6290040
ISSHS140700EL	Aluminium	Anodised	2	1	466.000	6290043

Alu Aluminium

EL Anodised

ISS aluminium service pole, 2-compartment, with a 76.5 mm system opening.
Empty, equippable with standard devices (socket, telephone, etc.), max. 10 devices.
Direct fastening on floor possible. Accessory mounting boxes to be ordered separately.
The service pole is suitable for accepting front locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.




Service pole, type ISSOGHS70140

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSOGHS70140EL	—	Anodised	1	220.500	6289096
ISSOGHS70140RW	Pure white	—	1	220.500	6289098


Alu Aluminium

EL Anodised

ISS aluminium service pole with a 76.5 mm system opening.
Set consists of:
1 single-compartment pole with stand
Total length: 675 mm
1 aluminium cover
Length: 675 mm
The design of this ISS service pole is based on the oval-shaped aluminium profile of ISSOG70140 floor-ceiling poles. The 76.5 mm system opening is suitable for directly accepting mounting box accessories of series 71GD... for the equipment with switching and connection devices.



Service pole, type ISSHS6




Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSHS6EL	—	Anodised	6	1	720.000	6290073

Alu Aluminium
EL Anodised

ISS service pole centre

Empty, can be equipped from all four sides with standard devices (socket, telephone, etc.). Two sides of the installation centre can be equipped in two compartments, the other two sides in one. Each installation compartment can accept 5 devices, the entire installation centre accepts max. 30 devices. Direct fastening on floor possible. Accessory mounting boxes to be ordered separately. The service pole is suitable for accepting front locking accessory mounting boxes of the series 71GD.... The installation of a partition of type GA-TW (6279711) and the installation of the cover clip, type KL80A, are possible as an option.

Service pole, type ISSRHSM45



Type	Colour	Surface finish	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRHSM45RW	Pure white	—	1	1	135.000	6290090
ISSRHSM45EL	—	Anodised	1	1	135.000	6290091

Alu Aluminium
EL Anodised

ISS aluminium service pole with a 45 mm system opening for direct installation of Modul 45 switching and connection devices.

Pole consists of:

1 one-compartment pole with stand

Total length: 670 mm

1 aluminium column

Length: 670 mm

The design of this ISS service pole is based on an extremely slim, round aluminium profile, which shows a smooth cover of the Rapid 45 device installation trunking series on the front side. The 45 mm system opening is suitable for direct fitting of Modul 45 switching and connection devices. The installation compartment is theoretically sufficient for 14 Modul 45 devices. If Modul 45 connect is used or in the case of cabling requiring a lot of space, the number of the max. installable devices is reduced. The installation of a partition, type 2371/40 (6023096), is possible as an option.

Service pole, type ISSDHSM45

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDHSM45RW	Pure white	—	1	281.500	6289980
ISSDHSM45EL	—	Anodised	1	281.500	6289982

Alu Aluminium

EL Anodised

ISS service pole made from aluminium with 45 mm system opening for the direct installation of Modul 45 switching and connection devices.

Pole consists of:


1 two-compartment pole with stand

Total length 670 mm


2 aluminium covers

Length 670 mm

The design of this service pole is based on an extremely narrow, oval aluminium profile which shows on both narrow sides of the oval a cover of the Rapid 45 device installation trunking series. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices. The installation area is theoretically sufficient for 2 x 14 Modul 45 devices. If Modul 45 connect is used or in the case of cabling requiring a lot of space, the number of the max. installable devices is reduced. There is the option to install a partition, type 2371/40 (6023096).



Accessory mounting box, single




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD6	Iron grey	5	5.600	6288611

PA Polyamide

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Accessory mounting box, double




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611

PA Polyamide

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.

Service outlet, single, Modul 45®




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
71GD8-2	1	5.900	6288569

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Service outlet, double, Modul 45®




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
71GD13	1	11.000	6288583

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Service outlet, triple, Modul 45®




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
71GD9-2	1	11.600	6288579

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Protective conductor connection bracket



Type	Surface finish	Length mm	Colour	Pack. Weight		Item No.
				pcs	kg/100 pcs.	
8AWR	Electrogalvanised	—	—	10	0.610	6288704

SI Steel

G Electrogalvanised

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.



Clamping area: 2 x 1.5 – 4 mm²


Locking bracket for covers, 80 mm system opening

Type	Surface			Pack. pcs	Weight		Item No.
	finish	mm	Colour		kg/100	pcs.	
RKV3V	—	—	—	20	0.085		6288700

St Steel

Locking bracket for the mechanical and electrical connection of trunking covers and trunking bases. Suitable for covers of Rapid 45, Rapid 80 and ISS systems.



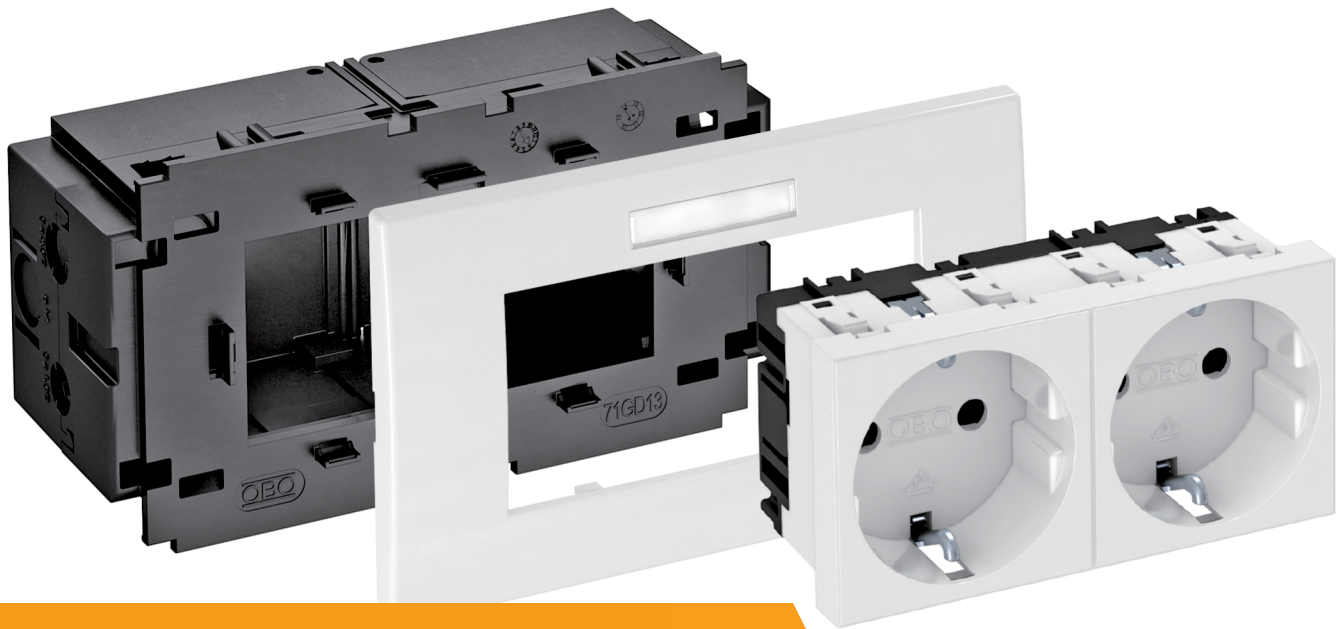

Modul 45® and standard – installation solutions for device installation trunking and service poles with 80 mm system opening

The Modul 45 devices from OBO Bettermann are compact and space-saving. They are therefore ideal for use in device installation trunking and service poles. The Modul 45 system makes optimum use of limited installation space.

The advantages of Modul 45 at a glance:


- Space savings thanks to compact design
- Modular structure
- Quick and easy planning
- Simple mounting
- High efficiency due to time and cost savings
- Wide range of application options
- Easy exchangeability



Modul 45® and standard installation solutions for device installation trunking and service poles

	Modul 45®, Pre-terminated installation units for 80 mm trunking systems	326
	Modul 45®, device installation in 80 mm trunking systems	331
	Modul 45® – sockets	337
	Modul 45®, USB charging device	340
	Modul 45®, surge protection for sockets	341
	Modul 45®, switching devices	342
	Modul 45®, data technology solutions	344
	Modul 45®, multimedia solutions	363
	Modul 45®, installation components	364
	Standard, device installation in 80 mm trunking systems	334
	Modul 45connect® plug-in installation solutions for device installation trunking and service poles	367

Socket unit AR45, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW1	Pure white	4	10.700	6119401
SDE-RW D0GN1	Mint green	4	10.700	6119402
SDE-RW D0RT1	Signal red	4	10.700	6119403

PC Polycarbonate

Pre-terminated socket unit without labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, single, type 71GD8-2.
- Protective contact socket, single, 0° connection direction, colour: see table.
- Cover frame AR45, single, without labelling panel, colour: pure white

Socket unit AR45, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW2	Pure white	2	19.000	6119407
SDE-RW D0GN2	Mint green	2	19.000	6119408
SDE-RW D0RT2	Signal red	2	19.000	6119409

PC Polycarbonate

Pre-terminated socket unit without labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, double, type 71GD13
- Protective contact socket, double, 0° connection direction, colour: see table
- Cover frame AR45, double, without labelling panel, type AR45-BF..., colour: pure white

Socket unit AR45, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW3	Pure white	2	23.300	6119414
SDE-RW D0GN3	Mint green	2	23.300	6119415
SDE-RW D0RT3	Signal red	2	23.300	6119413

PC Polycarbonate

Pre-terminated socket unit without labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, triple, type 71GD9-2
- Protective contact socket, triple, 0° connection direction, colour: see table
- Cover frame AR45, triple, without labelling panel, type AR45-BF..., colour: pure white

Socket unit AR45, double, with labelling panel for horizontal device installation



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW2B	Pure white	2	19.000	6119427
SDE-RW D0GN2B	Mint green	2	19.000	6119428
SDE-RW D0RT2B	Signal red	2	19.000	6119429

PC Polycarbonate

Pre-terminated socket unit with labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, double, type 71GD13
- Protective contact socket, double, 0° connection direction, colour: see table
- Cover frame AR45, double, with labelling panel, type AR45-BF..., colour: pure white




Socket unit AR45, single, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW1B	Pure white	4	10.700	6119421
SDE-RW D0GN1B	Mint green	4	10.700	6119422
SDE-RW D0RT1B	Signal red	4	10.700	6119423

PC Polycarbonate

Pre-terminated socket unit with labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, single, type 71GD8-2
- Protective contact socket, single, 0° connection direction, colour: see table
- Cover frame AR45, single, with labelling panel, type AR45-BF..., colour: pure white




Socket unit AR45, triple, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SDE-RW D0RW3B	Pure white	2	23.300	6119433
SDE-RW D0GN3B	Mint green	2	23.300	6119434
SDE-RW D0RT3B	Signal red	2	23.300	6119435

PC Polycarbonate

Pre-terminated socket unit with labelling panel, suitable for installation in Rapid 80 device installation trunking systems. Socket unit, consisting of:

- Service outlet, triple, type 71GD9-2
- Protective contact socket, triple, 0° connection direction, colour: see table
- Cover frame AR45, triple, with labelling panel, type AR45-BF..., colour: pure white



Installation unit AR45, for 2 PU


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
IKR-6 RW	Pure white	1	19.000	6119319

PC Polycarbonate

Installation unit to accept protective units such as miniature circuit breakers or FI protection switches up to max. 2 PUs, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles.

Installation unit, consisting of:

- Accessory mounting box, triple, type 71GD9-2
- Cover, incl. PVC support clamp for 2 PUs, colour: see table
- Cover frame AR45, triple, without labelling panel, colour: pure white



Socket unit CEE, single, 16 A


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE16	Graphite black	1	31.100	6119483

PA Polyamide


Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.

Scope of delivery:

- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 16 A with mounting accessories



Socket unit CEE, single, 32 A



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE32	Graphite black	1	37.200	6119485
PA Polyamide				

Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.

Scope of delivery:

- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 32 A with mounting accessories




Installation unit AR45, for 2 PU

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
IKR-6 RW	Pure white	1	19.000	6119319
PC	Polycarbonate			

Installation unit to accept protective units such as miniature circuit breakers or FI protection switches up to max. 2 PUs, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles.

Installation unit, consisting of:


- Accessory mounting box, triple, type 71GD9-2
- Cover, incl. PVC support clamp for 2 PUs, colour: see table
- Cover frame AR45, triple, without labelling panel, colour: pure white




Installation unit

Type	Installation depth mm	Pack. pcs	Weight kg/100 pcs.	Item No.
IKR4RW	52	1	85.400	6288365

Installation unit for the installation of automatic circuit breakers or FI protection switches in device installation trunking. With 1 hat rail of 3 part units. Series terminals for N and PE on hat rails, completely wired with 6 mm². The installation unit is pre-wired and ready for connection. The cable cross-section is 6 mm². Two type V-Tec M20 cable glands for cable entry are included in the delivery.



Flush-mount unit for data technology, type A




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTE-RW G2A1	Pure white	4	5.000	6119494
PC Polycarbonate				

Flush-mount unit to accept two Type A data technology modules, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles. The type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Toolless; Brand-Rex: modules with item numbers ending in ...JAKS000CR and ...JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.

Flush-mount unit, consisting of:

- Mounting support, single, type 71MT1 45
- Data technology support, straight outlet, type DTG-2A, colour: See table
- Cover frame AR45, single, without labelling panel, colour: Pure white

Flush-mount unit for data technology, type C




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTE-RW G2C1	Pure white	4	5.000	6119492
PC Polycarbonate				

Flush-mount unit to accept two Type C data technology modules, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles. The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fix-link Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine Keystone Cat. 6A; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Flush-mount unit, consisting of:

- Mounting support, single, type 71MT1 45
- Data technology support, straight outlet, type DTG-2C, colour: See table
- Cover frame AR45, single, without labelling panel, colour: Pure white

Flush-mount unit for data technology, type RM



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
DTE-RW G2RM1	Pure white	4	5.000	6119490
PC Polycarbonate				

Flush-mount unit to accept two Type RM data technology modules, suitable for installation in Rapid 80 device installation trunking systems and ISS service poles. The type RM data technology support is suitable for accepting the following data connection modules: OBO (type): ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat. 5 and Cat. 6 modules without support plate.

Flush-mount unit, consisting of:

- Mounting support, single, type 71MT1 45
- Data technology support, straight outlet, type DTG-2RM, colour: See table
- Cover frame AR45, single, without labelling panel, colour: Pure white




Service outlet, single, Modul 45®



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8-2		1	5.900	6288569

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Mounting support, single, for Modul 45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71MT1 45	Light grey	10	2.000	6288572

PA Polyamide

Front locking single mounting support for Modul 45 data technology systems and Modul 45connect protective contact sockets with Wieland connection.




Cover frame AR45, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F1 RW	Pure white	1	1.600	6119322
AR45-F1 SWGR	Black-grey	1	1.600	6119324
AR45-F1 AL	Aluminium painted	1	1.600	6119326

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF1 RW	Pure white	1	1.500	6119332
AR45-BF1 SWGR	Black-grey	1	1.500	6119334
AR45-BF1 AL	Aluminium painted	1	1.500	6119336

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for vertical device installation


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF1 RW	Pure white	1	1.500	6119338
AR45-BSF1 SWGR	Black-grey	1	1.500	6119339
AR45-BSF1 AL	Aluminium painted	1	1.500	6119340

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD8-2.



Service outlet, double, Modul 45®




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
71GD13	1	11.000	6288583

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Mounting support, double, for Modul 45




Type	Pack. Weight		Item No.
	pcs	kg/100 pcs.	
71MT2 45	5	3.050	6288576

PA Polyamide

Front locking double mounting support for Modul 45 data technology systems and Modul 45connect protective contact sockets with Wieland connection.

Cover frame AR45, double




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
AR45-F2 RW	Pure white	1	2.320	6119342
AR45-F2 SWGR	Black-grey	1	2.320	6119344
AR45-F2 AL	Aluminium painted	1	2.320	6119346

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Cover frame AR45, double, with labelling panel for horizontal device installation




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
AR45-BF2 RW	Pure white	1	2.260	6119352
AR45-BF2 SWGR	Black-grey	1	2.260	6119354
AR45-BF2 AL	Aluminium painted	1	2.260	6119356

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Cover frame AR45, double, with labelling panel for vertical device installation



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
AR45-BSF2 RW	Pure white	1	2.260	6119362
AR45-BSF2 SWGR	Black-grey	1	2.260	6119364
AR45-BSF2 AL	Aluminium painted	1	2.260	6119366

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Service outlet, triple, Modul 45®



Type	Pack. pcs	Weight kg/100 pcs	Item No.
71GD9-2	1	11.600	6288579

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.




Mounting support, triple, for Modul 45

Type	Pack. pcs	Weight kg/100 pcs	Item No.
71MT3 45-2	5	3.200	6288574

PA Polyamide

Front locking double/triple mounting support for Modul 45 data technology systems and Modul 45connect protective contact sockets with Wieland connection.




Cover frame AR45, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs	Item No.
AR45-F3 RW	Pure white	1	2.800	6119372
AR45-F3 SWGR	Black-grey	1	2.800	6119374
AR45-F3 AL	Aluminium painted	1	2.800	6119376

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.




Cover frame AR45, triple, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs	Item No.
AR45-BF3 RW	Pure white	1	2.800	6119382
AR45-BF3 SWGR	Black-grey	1	2.800	6119384
AR45-BF3 AL	Aluminium painted	1	2.800	6119386

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.




Cover frame AR45, triple, with labelling panel for vertical device installation


Type	Colour	Pack. pcs	Weight kg/100 pcs	Item No.
AR45-BSF3 RW	Pure white	1	2.800	6119387
AR45-BSF3 SWGR	Black-grey	1	2.800	6119388
AR45-BSF3 AL	Aluminium painted	1	2.800	6119389

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.




Accessory mounting box, single



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD6	Iron grey	5	5.600	6288610
PA Polyamide				

Front locking accessory mounting box for switch systems, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.


Accessory mounting box, double



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD7	Iron grey	2	11.000	6288611
PA Polyamide				

Front locking accessory mounting box for standard switch ranges for the installation of two individual installation devices or a multiple power socket. With unfolding, and also removable, base for time-saving cable connection and with feed openings for cable diameters of up to 14 mm.


Service outlet, single, with large installation opening



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71GD11		1	4.600	6288532
PA Polyamide				

Accessory mounting box to accept standard switching and connection devices in support ring and support clamp versions of all manufacturers. An extra large installation opening means that the box is also suited to accept ELKO devices as well as larger versions of data technology connection sockets. With the data technology application, it is possible to do without the protective housing if necessary.


Mounting support for data technology



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
71MTD		5	1.640	6288577
PA Polyamide				

Mounting support for the installation of data technology devices in device installation trunking of the Rapid 80 series and ISS service poles with 80 mm system opening.

Strain relief for service outlet



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
7ZE		50	0.700	6288790
PA Polyamide				

Strain relief with locking clips, suitable for the accessory mounting boxes 7GD... and 71GD...





Accessory mounting box CEE, 16 A

Type	Colour	Pack. pcs	Weight		Item No.
			kg	100 pcs.	
CEE16E2	Iron grey	1	34.110		6288612

PA Polyamide

Accessory mounting box, complete, for the installation of a CEE connection device in device installation trunking with 80 mm cover, consisting of:

- Front locking device installation trunking
- CEE connection unit and mounting material
- CEE socket 16 A




CEE installation

Type	Colour	Pack. pcs	Weight		Item No.
			kg	100 pcs.	
71GDCEE	—	1	13.700		6288635

PA Polyamide

Accessory mounting box for installation of a 5-pole CEE socket, 16 A or 32 A, with four-point fastening track 60 x 60 mm or 70 x 70 mm; with external strain relief for jacketed cables of up to Ø 18 mm; with eccentric lock for quick, screwless fastening.





Connection socket - 71VD80

Type	Item No.
71VD80	6279817

PP Polypropylene

Connection socket for wiring in device installation trunking and service poles. The socket can be coupled by locking onto accessory mounting boxes of the series 71GD....





Accessory mounting box CEE, 16 A

Type	Colour	Pack. pcs	Weight		Item No.
			kg	100 pcs.	
CEE16E2	Iron grey	1	34.110		6288612


PA Polyamide

Accessory mounting box, complete, for the installation of a CEE connection device in device installation trunking with 80 mm cover, consisting of:

- Front locking device installation trunking
- CEE connection unit and mounting material
- CEE socket 16 A



Cover frame AR50, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR50-F1 RW	Pure white	1	1.620	6119392
AR50-F1 SWGR	Black-grey	1	1.620	6119394
AR50-F1 AL	Aluminium painted	1	1.620	6119396

PC Polycarbonate


Front locking cover frame for devices with 50 mm central plate, single, without labelling panel for horizontal and vertical device installation, for mounting on accessory mounting box 71GD6, 71GD11 or in mounting support 71MTD.



Socket 0°, Switzerland, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-CH0 RW1	Pure white	1	3.400	6117200
PC Polycarbonate				



Socket, single 0°, to Swiss standard (SEV), with screwless terminals, 2-pin, 10 A, 250 V~, type 13, with connection terminals to IEC 60884-1.



Socket 0°, Denmark, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-DK0 RW1	Pure white	20	3.050	6117202
PC Polycarbonate				



Socket, single 0°, to Danish standard, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



Socket 0°, Denmark, single, IT-encoded

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
SKS-DKE0 RW1	Pure white	20	3.050	6117203
PC Polycarbonate				


Socket, single 0°, to Danish standard, encoded for IT power circuit, with screw terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



Socket 0°, Italy, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-IT0 RW0.5	Pure white	1	2.600	6120746
PC Polycarbonate				



Socket, single 0°, Italy P17/11, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.



Socket 0°, British Standard, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-BS0 RW1	Pure white	1	4.000	6120722
PC Polycarbonate				



Socket, single 0°, British Standard, conforming to BS 1363, with increased touch protection, with screw terminals, 2-pin, 13 A, 250 V~.




Socket 0° with switch, British Standard, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-BS0G RW1.5	Pure white	1	6.000	6120724
PC Polycarbonate				

Socket, single 0°, with switch, British Standard, conforming to BS 1363, with increased touch protection, with screw terminals, 2-pin, 13 A, 250 V~.



Socket 0°, South Africa/India, 16 A, single




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-SA0 RW1	Pure white	1	5.000	6120730

PC Polycarbonate

Socket, single 0°, South Africa/India, conforming to BS 546, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.

Socket 0° with switch, South Africa/India, 16 A, single




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-SA0G RW1.5	Pure white	1	6.700	6120734

PC Polycarbonate

Socket, single 0°, with switch, South Africa/India, conforming to BS 546, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.

Socket 0°, South Africa/India, 16 A, encoded version, single




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-SA0K SRO1	Signal red	1	5.000	6120732

PC Polycarbonate

Socket, single 0°, South Africa/India, encoded version, conforming to BS 546, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.

Socket 0°, with switch, South Africa/India, 16 A, encoded version, single




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-SA0GK SRO1.5	Signal red	1	6.700	6120736

PC Polycarbonate

Socket, single 0°, with switch, South Africa/India, encoded version, conforming to BS 546, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.

Socket 0°, India, combination IA6A3-EURO, single




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-IN0M RW1	Pure white	1	5.300	6120728

PC Polycarbonate

Socket, single 0°, India, combination IA6A3/Euro plug, with increased touch protection, with screw terminals, 2-pin, 6 A, 250 V~.

Socket 0°, India, 5 A, single



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STD-IN0 RW1	Pure white	1	4.300	6120726

PC Polycarbonate

Socket, single 0°, India, conforming to BS 546, with increased touch protection, with screw terminals, 2-pin, 5 A, 250 V~.




Socket 0°, multi-standard, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-MS0 RW1	Pure white	1	4.000	6120738

PC Polycarbonate

Socket, single 0°, multi-standard version, with increased touch protection, with screw terminals, 2-pin, 5/6/10/13 A, 250 V~.




Socket 0°, China, 10 A, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-CN0A10 RW1	Pure white	1	4.000	6120740

PC Polycarbonate

Socket, single 0°, China, with increased touch protection, with screw terminals, 2-pin, 10 A, 250 V~.




Socket 0°, China, 16 A, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-CN0A16 RW1	Pure white	1	4.100	6120742

PC Polycarbonate

Socket, single 0°, China, with increased touch protection, with screw terminals, 2-pin, 16 A, 250 V~.




Socket 0°, China, combination CN-NEMA-EURO, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-CN0M RW1.5	Pure white	1	5.800	6120744

PC Polycarbonate

Socket, single 0°, China, combination China-10A/NEMA-1/Euro plug, with increased touch protection, with screw terminals, 2-pin, 10 A, 250 V~.




Modul 45®, USB charging device



Charge mobile devices such as smartphones or tablets simply and easily via the standard USB connection. The OBO USB charging device can charge up to two mobile devices simultaneously and can be integrated in device installation devices, in service poles and in underfloor systems. Typical areas of application are airports, hotels, conference centres or offices.

USB charging device



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2UC2.1 RW1	Pure white	1	5.500	6105300
MTG-2UC2.1 SWGR1	Black-grey	1	5.500	6105302
MTG-2UC2.1 AL1	Aluminium painted	1	5.500	6105304

PC Polycarbonate

USB charging device with two USB type A sockets, for charging 1–2 mobile devices, maximum charging current 1 x 2,100 mA or 2 x 1,050 mA.



Fine power protection / dado trunking installation Modul 45




Type	Signalling on device	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSS 45-O-RW	Visual	Visual function display	1	2.411	6117473

Surge protection / network fine protection, type 3, according to EN 61643-11 for installation in Rapid 45 trunking, device installation trunking and underfloor systems.

- Version-O with acoustic function display
- Quick and easy mounting
- Low construction width of 22.5 mm

Application: The surge protection device secures downstream and nearby sockets.



Fine power protection / dado trunking installation Modul 45




Type	Signalling on device	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSS 45-A-RW	Audible	Acoustic function display	1	2.800	6117465

Surge protection / network fine protection, type 3, according to EN 61643-11 for installation in Rapid 45 trunking, device installation trunking and underfloor systems.

- Version-A with acoustic function display (switchable signal tone)
- Quick and easy mounting
- Low construction width of 22.5 mm

Application: The surge protection device secures downstream and nearby sockets.



Fine power protection for all installation systems




Type	Signalling on device	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSM-A	Audible	Acoustic function display	1	1.500	5092451
ÜSM-A-150	Audible	Acoustic function display	1	1.500	5092466

Surge protection module type 3 to DIN EN 61643-11 for 230 V power grids.

- With acoustic defect signal
- With low construction height
- Halogen-free plastic (UL 94 V-0)
- Y circuit

Application: Universally applicable for all installation systems.




Surge protection module with support




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ÜSM-A-4T	—	1	2.226	6107801

2-pin surge protection module, 16 A/250 V~, with acoustic default display, no network switch-off, for connection to a multiple socket of type Modul 45connect using the supplied support. For installation in universal supports UT3/45 and UT4/45. The surge protection module meets EN 61643-11, type 3, Class III, requirements Class D.



One-way/changeover switch, 1/2 module




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW0.5	Pure white	1	1.800	6120920
WS-UB SWGR0.5	Black-grey	1	1.800	6120922
WS-UB AL0.5	Aluminium painted	1	1.800	6120924

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.

One-way/changeover switch with warning lamp, 1/2 module




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW0.5	Pure white	1	1.800	6120926
WS-UKL SWGR0.5	Black-grey	1	1.800	6120928
WS-UKL AL0.5	Aluminium painted	1	1.800	6120930

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.

One-way/changeover switch, 1 module




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW1	Pure white	1	2.600	6120932
WS-UB SWGR1	Black-grey	1	2.600	6120934
WS-UB AL1	Aluminium painted	1	2.300	6120936

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.

One-way/changeover switch with warning lamp, 1 module




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW1	Pure white	1	2.300	6120938
WS-UKL SWGR1	Black-grey	1	2.300	6120940
WS-UKL AL1	Aluminium painted	1	2.300	6120942

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.

Roller blind switch, 1 module



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RS-BS RW1	Pure white	1	3.700	6120950
RS-BS SWGR1	Black-grey	1	3.700	6120952
RS-BS AL1	Aluminium painted	1	3.700	6120954

PC Polycarbonate

Roller blind switch with electrical and mechanical lock, 1-pin, 10 A, 250 V~, with screwless terminals.

Changeover switch, 1/2 module



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW0.5	Pure white	1	1.800	6120960
TA-WB SWGR0.5	Black-grey	1	1.800	6120962
TA-WB AL0.5	Aluminium painted	1	1.800	6120964

PC Polycarbonate


Changeover switch, 1-pin, 10 A, 250 V~, with screwless terminals.

Changeover switch, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW1	Pure white	1	3.300	6120966
TA-WB SWGR1	Black-grey	1	3.300	6120968
TA-WB AL1	Aluminium painted	1	3.300	6120970

PC Polycarbonate

Changeover switch, 1-pin, 10 A , 250 V~, with screwless terminals.




Roller blind button, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RT-BS RW1	Pure white	1	3.700	6120980
RT-BS SWGR1	Black-grey	1	3.700	6120982
RT-BS AL1	Aluminium painted	1	3.700	6120984

PC Polycarbonate

Roller blind button with electrical locking, 1-pin, 10 A, 250 V~, with screwless terminals.




Adapter for switch installation rotated through 90°


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AD-90G M45-1	1	2.200	6120992

St Steel

The adapter allows switch installation rotated through 90° in, for example, service poles with a 45 mm track or Rapid 45. Suitable for all switches and buttons in one module width (45 x 45 mm).



Data technology support, 1 module, straight outlet, type RM




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	6119292
DTG-2RM SWGR1	Black-grey	1	1.100	6119294
DTG-2RM AL1	Aluminium painted	1	1.100	6119296

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.


Data technology support, 1 module, straight outlet, type C




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	6119214
DTG-2C SWGR1	Black-grey	1	1.100	6119216
DTG-2C AL1	Aluminium painted	1	1.100	6119218

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.



Data technology support, 1 module, slanting outlet, type RM




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	6119298
DTS-2RM SWGR1	Black-grey	1	2.900	6119300
DTS-2RM AL1	Aluminium painted	1	2.900	6119302

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.


Data technology support, 1 module, slanting outlet, type C



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	6119250
DTS-2C SWGR1	Black-grey	1	1.500	6119252
DTS-2C AL1	Aluminium painted	1	1.500	6119254

PC Polycarbonate


Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.



RJ45 data connection module, Cat. 5e, unshielded

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-C5	1	1.120	6117337


Connection module Cat. 5e unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.



RJ45 data connection module, Cat. 5e, shielded

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-C5 G	1	2.660	6117325


Connection module Cat. 5e shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.



RJ45 data connection module, Cat. 6, unshielded

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-C6	1	1.060	6117341


Connection module Cat. 6 unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.




RJ45 data connection module, Cat. 6, shielded

Type	Pack.	Weight	Item No.
	pcs	kg/100 pcs.	
ASM-C6 G	1	1.850	6117329

Connection module Cat. 6 shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.




Connection module Cat. 6A, unshielded, snap-in



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
ASM-C6A	Grey	1	1.050	6117348

Connection module Cat. 6A (ISO) unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, shielded, snap-in



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
ASM-C6A G	Grey	1	1.630	6117346

Connection module Cat. 6A (ISO) shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.




Selection aid – installation of data technology modules from different manufacturers

Manufacturer	Data technology module	Data technology support
3M	Volition K6	Type C (without dust protection slider)
3M	Volition CAT6A	Type C (without dust protection slider)
AMP/Tyco	SL Series 110Connect (without dust protection flap)	Type A
AMP/Tyco	SL Series Toolless (without dust protection flap)	Type A
Avaya/Systimax	M series	Type F
Brand-Rex	Modules with the item number ending ...JAKS000CR	Type A
Brand-Rex	Modules with the item number ending ...JAKU002	Type A
BTR Netcom	Cat.6A Modul (Keystone design)	Type C
BTR Netcom	UTP Modul (Keystone design)	Type C
BTR Netcom	Cat.6A Modul (module design)	Type B
BTR Netcom	E-DAT Modul (module design)	Type B
BTR Netcom	UAE Modul (module design)	Type B
CobiNet	CobiDat KS	Type C
Corning	Modules with Keystone retainer	Type C
Dätwyler Cables	MS module	Type B
Dätwyler Cables	MS-N module	Type B
Dätwyler Cables	KS-T and KS-TS module	Type C
Dätwyler Cables	MS-K module	Type C
Dätwyler Cables	KU-T module	Type C
EKU	E-Stone module	Type C
Harting	Prelink RJ45 Keystone module Cat.6A	Type C
Harting	Fixlink RJ45 Keystone module Cat.6A	Type C
Komos	KDM 500 module	Type C
Leoni Kerpen	VarioKeystone, Cat. 6A socket module	Type B
Leoni Kerpen	MegaLine Connect100, socket module Cat. 6A and 8C7A	Type B
Leoni Kerpen	MegaLine Connect45, Keystone socket module	Type C
Leoni Kerpen	MegaLine Connect45, ELine	Type EP
Lexcom/Schneider	LexCom 125	Type LE
Lexcom/Schneider	LexCom 250	Type LE
Lexcom/Schneider	LexCom 500	Type LE
Nexans	LANmark RJ45 with blue adapter clip	Type A
Nexans	LANmark GG45 with metal clip	Type A
OBO Bettermann	Connection module, type ASM-C6A	Type C
OBO Bettermann	Connection module, type ASM-C6A G	Type C
OBO Bettermann	Connection module, type ASM-C5	Type RM
OBO Bettermann	Connection module, type ASM-C5 G	Type RM
OBO Bettermann	Connection module, type ASM-C6	Type RM
OBO Bettermann	Connection module, type ASM-C6 G	Type RM
Panduit	Mini-Com	Type PA
R&M	Cat. 6A module with Keystone fastening	Type C
R&M	Cat. 5 and Cat. 6 modules without support plate	Type RM
Rutenbeck	UM module	Type C
Rutenbeck	Umflex module	Type C
SETEC	UKJ module	Type C
SETEC	XKJ module	Type C
Telegärtner	AMJ module	Type C
Telegärtner	UMJ module	Type C



Data technology support, 1 module, straight outlet, type A

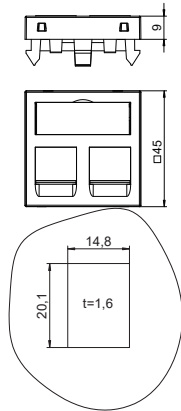


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2A RW1	Pure white	1	1.100	6119202
DTG-2A SWGR1	Black-grey	1	1.100	6119204
DTG-2A AL1	Aluminium painted	1	1.100	6119206

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type A

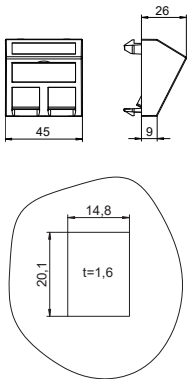


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2A RW1	Pure white	1	2.000	6119238
DTS-2A SWGR1	Black-grey	1	1.500	6119240
DTS-2A AL1	Aluminium painted	1	1.500	6119242

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type B

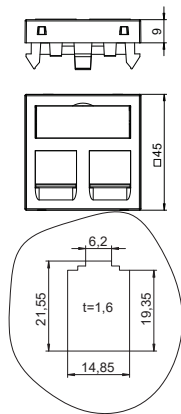


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2B RW1	Pure white	1	1.100	6119208
DTG-2B SWGR1	Black-grey	1	1.100	6119210
DTG-2B AL1	Aluminium painted	1	1.100	6119212

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type B

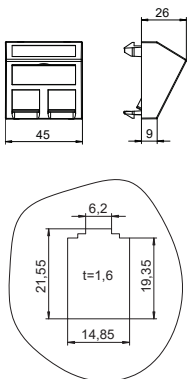

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2B RW1	Pure white	1	1.500	6119244
DTS-2B SWGR1	Black-grey	1	1.500	6119246
DTS-2B AL1	Aluminium painted	1	1.500	6119248

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.




Data technology support, 1 module, straight outlet, type C

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTG-2C RW1	Pure white	1	1.100		6119214
DTG-2C SWGR1	Black-grey	1	1.100		6119216
DTG-2C AL1	Aluminium painted	1	1.100		6119218

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

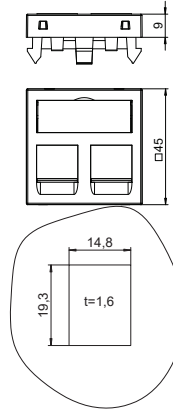


Data technology support, 1 module, slanting outlet, type C

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTS-2C RW1	Pure white	1	1.500		6119250
DTS-2C SWGR1	Black-grey	1	1.500		6119252
DTS-2C AL1	Aluminium painted	1	1.500		6119254

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

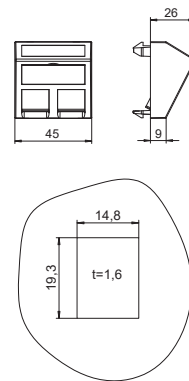


Data technology support, 1 module, straight outlet, type C, without dust protection slider


Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTG-02C RW1	Pure white	1	1.000		6119280
DTG-02C SWGR1	Black-grey	1	1.000		6119282
DTG-02C AL1	Aluminium painted	1	1.000		6119284

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

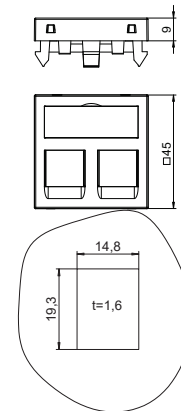

Data technology support, 1 module, slanting outlet, type C, without dust protection slider

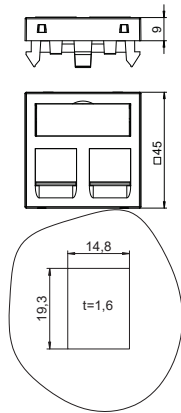


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-02C RW1	Pure white	1	1.400	6119286
DTS-02C SWGR1	Black-grey	1	1.400	6119288
DTS-02C AL1	Aluminium painted	1	1.400	6119290

PC Polycarbonate

Data technology support with slanting outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type EP




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2EP RW1	Pure white	1	1.100	6119232
DTG-2EP SWGR1	Black-grey	1	1.100	6119234
DTG-2EP AL1	Aluminium painted	1	1.100	6119236

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type EP




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2EP RW1	Pure white	1	1.500	6119268
DTS-2EP SWGR1	Black-grey	1	1.500	6119270
DTS-2EP AL1	Aluminium painted	1	1.500	6119272

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type F




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2F RW1	Pure white	1	1.100	6119220
DTG-2F SWGR1	Black-grey	1	1.100	6119222
DTG-2F AL1	Aluminium painted	1	1.100	6119224

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Data technology support, 1 module, slanting outlet, type F



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2F RW1	Pure white	1	1.500	6119256
DTS-2F SWGR1	Black-grey	1	1.500	6119258
DTS-2F AL1	Aluminium painted	1	1.500	6119260

PC Polycarbonate


Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type F has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type PA

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTG-2PA RW1	Pure white	1	1.100		6119226
DTG-2PA SWGR1	Black-grey	1	1.100		6119228
DTG-2PA AL1	Aluminium painted	1	1.100		6119230

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.




Data technology support, 1 module, slanting outlet, type PA

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTS-2PA RW1	Pure white	1	1.500		6119262
DTS-2PA SWGR1	Black-grey	1	1.500		6119264
DTS-2PA AL1	Aluminium painted	1	1.500		6119266

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.




Data technology support, 1 module, straight outlet, type RM

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTG-2RM RW1	Pure white	1	1.100		6119292
DTG-2RM SWGR1	Black-grey	1	1.100		6119294
DTG-2RM AL1	Aluminium painted	1	1.100		6119296

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.




Data technology support, 1 module, slanting outlet, type RM

Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTS-2RM RW1	Pure white	1	2.900		6119298
DTS-2RM SWGR1	Black-grey	1	2.900		6119300
DTS-2RM AL1	Aluminium painted	1	2.900		6119302

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.




Data technology support, 1 module, straight outlet, type LE


Type	Colour	Pack. pcs	Weight		Item No.
			kg/100	pcs.	
DTG-02LE RW1	Pure white	1	0.900		6119304
DTG-02LE SWGR1	Black-grey	1	0.900		6119306
DTG-02LE AL1	Aluminium painted	1	0.900		6119308

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type LE has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.



D-Sub9 connection, 1 module, straight outlet, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 S RW1	Pure white	1	2.400	6104634
MTG-DB9 S SWGR1	Black-grey	1	2.400	6104637
MTG-DB9 S AL1	Aluminium painted	1	2.400	6104640

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, slanting outlet, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 S RW1	Pure white	1	2.600	6104646
MTS-DB9 S SWGR1	Black-grey	1	2.600	6104649
MTS-DB9 S AL1	Aluminium painted	1	2.600	6104652

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, straight outlet, with connection cable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 F RW1	Pure white	1	5.200	6104682
MTG-DB9 F SWGR1	Black-grey	1	5.200	6104685
MTG-DB9 F AL1	Aluminium painted	1	5.200	6104688

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, slanting outlet, with connection cable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 F RW1	Pure white	1	5.400	6104694
MTS-DB9 F SWGR1	Black-grey	1	5.400	6104697
MTS-DB9 F AL1	Aluminium painted	1	5.400	6104700

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

USB 2.0 / 3.0 connection, 1 module, straight outlet, as screw connection



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A S RW1	Pure white	1	2.500	6104874
MTG-U3A S SWGR1	Black-grey	1	2.500	6104877
MTG-U3A S AL1	Aluminium painted	1	2.500	6104880

PC Polycarbonate


Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, USB 3.0 Type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

USB 2.0 / 3.0 connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A S RW1	Pure white	1	2.700	6104886
MTS-U3A S SWGR1	Black-grey	1	2.700	6104889
MTS-U3A S AL1	Aluminium painted	1	2.700	6104892

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, USB 3.0 type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




USB 2.0 / 3.0 connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A F RW1	Pure white	1	6.000	6104922
MTG-U3A F SWGR1	Black-grey	1	6.000	6104925
MTG-U3A F AL1	Aluminium painted	1	6.000	6104928

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




USB 2.0 / 3.0 connection, 1 module, slanting outlet, with connection cable


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A F RW1	Pure white	1	6.200	6104934
MTS-U3A F SWGR1	Black-grey	1	6.200	6104937
MTS-U3A F AL1	Aluminium painted	1	6.200	6104940

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.



VGA connection, 1 module, straight outlet, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA S RW1	Pure white	1	2.400	6104610
MTG-VGA S SWGR1	Black-grey	1	2.400	6104613
MTG-VGA S AL1	Aluminium painted	1	2.400	6104616

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA S RW1	Pure white	1	2.600	6104622
MTS-VGA S SWGR1	Black-grey	1	2.600	6104625
MTS-VGA S AL1	Aluminium painted	1	2.600	6104628

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, straight outlet, with connection cable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA F RW1	Pure white	1	5.200	6104658
MTG-VGA F SWGR1	Black-grey	1	5.200	6104661
MTG-VGA F AL1	Aluminium painted	1	5.200	6104664

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, with connection cable




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA F RW1	Pure white	1	5.400	6104670
MTS-VGA F SWGR1	Black-grey	1	5.400	6104673
MTS-VGA F AL1	Aluminium painted	1	5.400	6104676

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Mini jack connection, 1 module, straight outlet, as soldered connection



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-MK L RW1	Pure white	1	1.500	6104946
MTG-MK L SWGR1	Black-grey	1	1.500	6104949
MTG-MK L AL1	Aluminium painted	1	1.500	6104952

PC Polycarbonate


Multimedia support with one mini jack connection socket, straight cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Mini jack connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-MK L RW1	Pure white	1	1.700	6104958
MTS-MK L SWGR1	Black-grey	1	1.700	6104961
MTS-MK L AL1	Aluminium painted	1	1.700	6104964

PC Polycarbonate

Multimedia support with one mini jack connection socket, slanting cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Video cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R L RW1	Pure white	1	1.500	6104970
MTG-R L SWGR1	Black-grey	1	1.500	6104973
MTG-R L AL1	Aluminium painted	1	1.500	6104976

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Video cinch connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R L RW1	Pure white	1	1.700	6104982
MTS-R L SWGR1	Black-grey	1	1.700	6104985
MTS-R L AL1	Aluminium painted	1	1.700	6104988

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Video cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R F RW1	Pure white	1	1.500	6104994
MTG-R F SWGR1	Black-grey	1	1.500	6104997
MTG-R F AL1	Aluminium painted	1	1.500	6105000

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Video cinch connection, 1 module, slanting outlet, as 1:1 coupling


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R F RW1	Pure white	1	1.700	6105006
MTS-R F SWGR1	Black-grey	1	1.700	6105009
MTS-R F AL1	Aluminium painted	1	1.700	6105012

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.



Audio cinch connection, 1 module, straight outlet, as soldered connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R L RW1	Pure white	1	2.500	6105042
MTG-2R L SWGR1	Black-grey	1	2.500	6105045
MTG-2R L AL1	Aluminium painted	1	2.500	6105048

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, slanting outlet, as soldered connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R L RW1	Pure white	1	2.700	6105054
MTS-2R L SWGR1	Black-grey	1	2.700	6105057
MTS-2R L AL1	Aluminium painted	1	2.700	6105060

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, straight outlet, as 1:1 coupling




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R F RW1	Pure white	1	2.500	6105066
MTG-2R F SWGR1	Black-grey	1	2.500	6105069
MTG-2R F AL1	Aluminium painted	1	2.500	6105072

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, slanting outlet, as 1:1 coupling




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R F RW1	Pure white	1	2.700	6105078
MTS-2R F SWGR1	Black-grey	1	2.700	6105081
MTS-2R F AL1	Aluminium painted	1	2.700	6105084

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, straight outlet, as soldered connection



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R L RW1	Pure white	1	3.200	6105114
MTG-3R L SWGR1	Black-grey	1	3.200	6105117
MTG-3R L AL1	Aluminium painted	1	3.200	6105120

PC Polycarbonate


Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R L RW1	Pure white	1	3.400	6105126
MTS-3R L SWGR1	Black-grey	1	3.400	6105129
MTS-3R L AL1	Aluminium painted	1	3.400	6105132

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Component video connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R F RW1	Pure white	1	3.200	6105138
MTG-3R F SWGR1	Black-grey	1	3.200	6105141
MTG-3R F AL1	Aluminium painted	1	3.200	6105144

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Component video connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R F RW1	Pure white	1	3.400	6105150
MTS-3R F SWGR1	Black-grey	1	3.400	6105153
MTS-3R F AL1	Aluminium painted	1	3.400	6105156

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Audio/video cinch connection, 1 module, straight outlet, as soldered connection


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R L RW1	Pure white	1	3.200	6105162
MTG-12R L SWGR1	Black-grey	1	3.200	6105165
MTG-12R L AL1	Aluminium painted	1	3.200	6105168

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio-video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.



Audio/video cinch connection, 1 module, slanting outlet, as soldered connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R L RW1	Pure white	1	3.400	6105174
MTS-12R L SWGR1	Black-grey	1	3.400	6105177
MTS-12R L AL1	Aluminium painted	1	3.400	6105180

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, straight outlet, as 1:1 coupling




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R F RW1	Pure white	1	3.200	6105186
MTG-12R F SWGR1	Black-grey	1	3.200	6105189
MTG-12R F AL1	Aluminium painted	1	3.200	6105192

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, slanting outlet, as 1:1 coupling




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R F RW1	Pure white	1	3.400	6105198
MTS-12R F SWGR1	Black-grey	1	3.400	6105201
MTS-12R F AL1	Aluminium painted	1	3.400	6105204

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

BNC connection, 1 module, straight outlet, as 1:1 coupling




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-BC F RW1	Pure white	1	1.500	6105018
MTG-BC F SWGR1	Black-grey	1	1.500	6105021
MTG-BC F AL1	Aluminium painted	1	1.500	6105024

PC Polycarbonate

Multimedia support with one BNC connection socket, straight cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

BNC connection, 1 module, slanting outlet, as 1:1 coupling



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-BC F RW1	Pure white	1	1.700	6105030
MTS-BC F SWGR1	Black-grey	1	1.700	6105033
MTS-BC F AL1	Aluminium painted	1	1.700	6105036

PC Polycarbonate


Multimedia support with one BNC connection socket, slanting cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

2 x BNC connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2BC F RW1	Pure white	1	2.500	6105090
MTG-2BC F SWGR1	Black-grey	1	2.500	6105093
MTG-2BC F AL1	Aluminium painted	1	2.500	6105096

PC Polycarbonate

Multimedia support with two BNC connection sockets, straight cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




2 x BNC connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2BC F RW1	Pure white	1	2.700	6105102
MTS-2BC F SWGR1	Black-grey	1	2.700	6105105
MTS-2BC F AL1	Aluminium painted	1	2.700	6105108

PC Polycarbonate

Multimedia support with two BNC connection sockets, slanting cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




XLR connection, 1 module, straight outlet, 3-pin socket, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F L RW1	Pure white	1	3.000	6105210
MTG-X3F L SWGR1	Black-grey	1	3.000	6105213
MTG-X3F L AL1	Aluminium painted	1	3.000	6105216

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR socket with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M L RW1	Pure white	1	3.000	6105222
MTG-X3M L SWGR1	Black-grey	1	3.000	6105225
MTG-X3M L AL1	Aluminium painted	1	3.000	6105228

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR connector with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




XLR connection, 1 module, straight outlet, 3-pin socket, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F S RW1	Pure white	1	3.500	6105250
MTG-X3F S SWGR1	Black-grey	1	3.500	6105252
MTG-X3F S AL1	Aluminium painted	1	3.500	6105254

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Modul 45® and standard installation solutions for device installation trunking and service poles with 80 mm system opening



05_LFS_Produkteinheitenkatalog_EX_2018 / en / 2018/10/15 10:52:37 (LLEExport_022233) / 2018/10/15 10:55:22 10:55:22

XLR connection, 1 module, straight outlet, 3-pin connection, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M S RW1	Pure white	1	3.500	6105258
MTG-X3M S SWGR1	Black-grey	1	3.500	6105260
MTG-X3M S AL1	Aluminium painted	1	3.500	6105262

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Speakon connection, 1 module, straight outlet, 4-pin socket, as screw connection




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-SON S RW1	Pure white	1	2.800	6105270
MTG-SON S SWGR1	Black-grey	1	2.800	6105272
MTG-SON S AL1	Aluminium painted	1	2.800	6105274

PC Polycarbonate

Multimedia support with one Speakon connection socket, straight cable outlet, without labelling panel, Speakon 4-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Antenna connection, 1 module, TV / radio / SAT, antenna socket



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-3SD RW1	Pure white	1	11.596	6105282
ANT-3SD SWGR1	Black-grey	1	11.596	6105284
ANT-3SD AL1	Aluminium painted	1	11.000	6105286

PC Polycarbonate

Socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–2150 MHz
 Heat attenuation: 5-862 MHz - 1dB
 950-2150 MHz - 2 dB
 Return channel attenuation: 14 dB
 EMC protection class A




DVI-D connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI S RW1	Pure white	1	3.500	6104730
MTG-DVI S SWGR1	Black-grey	1	3.500	6104733
MTG-DVI S AL1	Aluminium painted	1	3.500	6104736

PC Polycarbonate

Multimedia support with one DVI-D connection socket, straight cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




DVI-D connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI S RW1	Pure white	1	3.700	6104742
MTS-DVI S SWGR1	Black-grey	1	3.700	6104745
MTS-DVI S AL1	Aluminium painted	1	3.700	6104748

PC Polycarbonate

Multimedia support with one DVI-D connection socket, slanting cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




DVI-I connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI F RW1	Pure white	1	6.000	6104754
MTG-DVI F SWGR1	Black-grey	1	6.000	6104757
MTG-DVI F AL1	Aluminium painted	1	6.000	6104760

PC Polycarbonate

Multimedia support with one DVI-I connection socket, straight cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.




DVI-I connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI F RW1	Pure white	1	6.200	6104766
MTS-DVI F SWGR1	Black-grey	1	6.200	6104769
MTS-DVI F AL1	Aluminium painted	1	6.200	6104772

PC Polycarbonate

Multimedia support with one DVI-I connection socket, slanting cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.




HDMI connection, 1 module, straight outlet, as screw connection


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD S RW1	Pure white	1	3.200	6104802
MTG-HD S SWGR1	Black-grey	1	3.200	6104805
MTG-HD S AL1	Aluminium painted	1	3.200	6104808

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.



HDMI connection, 1 module, slanting outlet, as screw connection




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
MTS-HD S RW1	Pure white	1	3.400	6104814
MTS-HD S SWGR1	Black-grey	1	3.400	6104817
MTS-HD S AL1	Aluminium painted	1	3.400	6104820

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, straight outlet, with connection cable




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
MTG-HD F RW1	Pure white	1	6.000	6104826
MTG-HD F SWGR1	Black-grey	1	6.000	6104829
MTG-HD F AL1	Aluminium painted	1	6.000	6104832

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, slanting outlet, with connection cable



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
MTS-HD F RW1	Pure white	1	6.200	6104838
MTS-HD F SWGR1	Black-grey	1	6.200	6104841
MTS-HD F AL1	Aluminium painted	1	6.200	6104844

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Multimedia support for VGA / D-Sub9 plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB O RW1	Pure white	1	0.700	6104706
MTG-DB O SWGR1	Black-grey	1	0.700	6104709
MTG-DB O AL1	Aluminium painted	1	0.700	6104712

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Multimedia support for VGA / D-Sub9 plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB O RW1	Pure white	1	0.900	6104718
MTS-DB O SWGR1	Black-grey	1	0.900	6104721
MTS-DB O AL1	Aluminium painted	1	0.900	6104724

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Multimedia support for DVI plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DV O RW1	Pure white	1	0.700	6104778
MTG-DV O SWGR1	Black-grey	1	0.700	6104781
MTG-DV O AL1	Aluminium painted	1	0.700	6104784

PC Polycarbonate

Multimedia support for a DVI plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Multimedia support for DVI plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DV O RW1	Pure white	1	0.900	6104790
MTS-DV O SWGR1	Black-grey	1	0.900	6104793
MTS-DV O AL1	Aluminium painted	1	0.900	6104796

PC Polycarbonate

Multimedia support for a DVI plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.




Multimedia support for SLR plug connector, 1 module, straight outlet



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X O RW1	Pure white	1	0.600	6105234
MTG-X O SWGR1	Black-grey	1	0.600	6105237
MTG-X O AL1	Aluminium painted	1	0.600	6105240

PC Polycarbonate

Multimedia support for a XLR plug connector, straight cable outlet, without labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.



Equipotential bonding socket, 1 module, straight outlet




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
PAD-ID6 RW1	Pure white	1	5.000	6120003
PAD-ID6 SWGR1	Black-grey	1	5.000	6120001
PAD-ID6 AL1	Aluminium painted	1	5.000	6120005

PC Polycarbonate

Equipotential bonding socket to DIN 42801, socket in black with green-yellow colour ring, cable connection to rear with M6 screw bolt, including two nuts, washers and a serrated washer.


TAE telephone connection socket, 1 module, F version



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TAE-6F AL1	Aluminium painted	1	2.000	6117430

Telephone connection box TAE 6 F.

Cable outlet for 3–11 mm cross-section




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KAL-K11 RW1	Pure white	1	3.500	6117420
KAL-K11 SWGR1	Black-grey	1	3.500	6117421
KAL-K11 AL1	Aluminium painted	1	3.500	6117422

PC Polycarbonate

Two-part cable outlet with labelling panel, consisting of a cable support with strain relief and a cover. The strain relief is suited for cable cross-sections of 3 to 11 mm. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Blanking cover with labelling panel, 1/2 module




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-BF RW0.5	Pure white	1	0.400	6117410
ADP-BF SWGR0.5	Black-grey	1	0.400	6117411
ADP-BF AL0.5	Aluminium painted	1	0.400	6117412

PC Polycarbonate

Blanking cover with labelling panel, suited for labelling devices in Rapid 45 device installation trunking systems and ISS service poles with a 45 mm system opening.


Blanking cover, 1/2 module



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW0.5	Pure white	10	0.400	6117414
ADP-B SWGR0.5	Black-grey	10	0.400	6117415
ADP-B AL0.5	Aluminium painted	1	0.400	6117416

Blanking lid for closing off empty spaces for a half device (1/2 module).


Blanking cover, 1 module



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW1	Pure white	10	0.800	6117406
ADP-B SWGR1	Black-grey	10	0.800	6117407
ADP-B AL1	Aluminium painted	1	0.800	6117408

Blanking lid for closing off empty spaces for a device (one module).



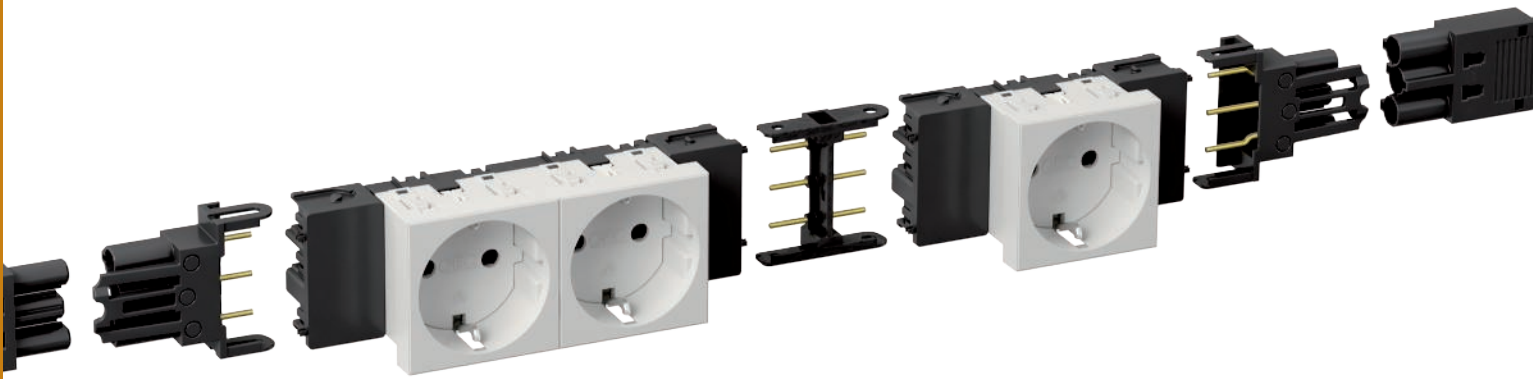

Modul 45connect® plug-in installation solutions for device installation trunking and service poles

As continuously connectable installation technology, Modul 45connect for device installation trunking and service poles offers the highest level of flexibility, security and cost efficiency.

From energy distribution through to device connection in the trunking, the system offers all the required installation components.



Modul 45connect® – plug-in installation solutions for device installation trunking and service poles



Modul 45connect®, sockets for Rapid 45 device installation trunking 368



Modul 45connect®, sockets for Rapid 80 device installation trunking 368



Modul 45connect®, 33° sockets for ISS service poles 370



Modul 45connect®, connection adapter for sockets 376




Consolidation Point 386



Installation accessories for plug connector systems 380

Socket 0°, protective contact, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW1	Pure white	1	4.200	6120008
STD-D0 ROR1	Pure orange	1	4.200	6120010
STD-D0 MZGN1	Mint green	1	4.200	6120012
STD-D0 SRO1	Signal red	1	4.200	6120014
STD-D0 SWGR1	Black-grey	1	4.200	6120016
STD-D0 AL1	Aluminium painted	1	4.200	6120018

PC Polycarbonate

Protective contact socket single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW2	Pure white	1	8.000	6120022
STD-D0 ROR2	Pure orange	1	8.000	6120024
STD-D0 MZGN2	Mint green	1	8.000	6120026
STD-D0 SRO2	Signal red	1	8.000	6120028
STD-D0 SWGR2	Black-grey	1	8.000	6120030
STD-D0 AL2	Aluminium painted	1	8.000	6120032

PC Polycarbonate

Protective contact socket double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW3	Pure white	1	12.200	6120042
STD-D0 ROR3	Pure orange	1	12.200	6120044
STD-D0 MZGN3	Mint green	1	12.200	6120046
STD-D0 SRO3	Signal red	1	12.200	6120048
STD-D0 SWGR3	Black-grey	1	12.200	6120050
STD-D0 AL3	Aluminium painted	1	12.200	6120052

PC Polycarbonate

Protective contact socket triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, encoded version, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO1	Signal red	1	4.200	6120292

PC Polycarbonate

Power socket single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, protective contact, encoded version, double



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO2	Signal red	1	8.000	6120294

PC Polycarbonate

Power socket double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.


Socket 0°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

PC Polycarbonate

Power socket triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.




Encoding pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

PC Polycarbonate

Encoding pin as socket attachment for the use of encoded sockets, type STD.




Strain relief for Modul 45 sockets 0°


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.

PC Polycarbonate

Strain relief for Modul 45 sockets, type STD, connectable at side, for the fastening of a 3-core cable, max. Ø 10 mm, suitable for protective contact sockets at direction of insertion 0° and sockets with earthing pin at direction of insertion 0°.



Socket 33°, protective contact, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW1	Pure white	1	4.000	6120072
STD-D3 ROR1	Pure orange	1	4.000	6120074
STD-D3 MZGN1	Mint green	1	4.000	6120076
STD-D3 SRO1	Signal red	1	4.000	6120078
STD-D3 SWGR1	Black-grey	1	4.000	6120080
STD-D3 AL1	Aluminium painted	1	4.000	6120082

PC Polycarbonate

Protective contact socket single 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW2	Pure white	1	7.800	6120102
STD-D3 ROR2	Pure orange	1	7.800	6120104
STD-D3 MZGN2	Mint green	1	7.800	6120106
STD-D3 SRO2	Signal red	1	7.800	6120108
STD-D3 SWGR2	Black-grey	1	7.800	6120110
STD-D3 AL2	Aluminium painted	1	7.800	6120112

PC Polycarbonate

Protective contact socket double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW3	Pure white	1	11.000	6120122
STD-D3 ROR3	Pure orange	1	11.000	6120124
STD-D3 MZGN3	Mint green	1	11.000	6120126
STD-D3 SRO3	Signal red	1	11.000	6120128
STD-D3 SWGR3	Black-grey	1	11.000	6120130
STD-D3 AL3	Aluminium painted	1	11.000	6120132

PC Polycarbonate

Protective contact socket triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, encoded version, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO1	Signal red	1	4.000	6120302

PC Polycarbonate

Power socket single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 33°, protective contact, encoded version, double



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO2	Signal red	1	7.700	6120304

PC Polycarbonate

Power socket double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.



Socket 33°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO3	Signal red	1	11.000	6120306

PC Polycarbonate

Power socket triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

The socket can only be used in conjunction with an encoding pin, type CST-STD.




Encoding pin


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CST-STD	Black	10	0.200	6120799

PC Polycarbonate

Encoding pin as socket attachment for the use of encoded sockets, type STD.



Socket 0°, with earthing pin, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW1	Pure white	1	4.000	6120152
STD-F0 ROR1	Pure orange	1	4.000	6120154
STD-F0 MZGN1	Mint green	1	4.000	6120155
STD-F0 SRO1	Signal red	1	4.000	6120158
STD-F0 SWGR1	Black-grey	1	4.000	6120160
STD-F0 AL1	Aluminium painted	1	4.000	6120162

PC Polycarbonate

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW2	Pure white	1	7.700	6120172
STD-F0 ROR2	Pure orange	1	7.700	6120174
STD-F0 MZGN2	Mint green	1	7.700	6120176
STD-F0 SRO2	Signal red	1	7.700	6120178
STD-F0 SWGR2	Black-grey	1	7.700	6120180
STD-F0 AL2	Aluminium painted	1	7.700	6120182

PC Polycarbonate

Socket with earthing pin double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW3	Pure white	1	11.800	6120192
STD-F0 ROR3	Pure orange	1	11.800	6120194
STD-F0 MZGN3	Mint green	1	11.800	6120196
STD-F0 SRO3	Signal red	1	11.800	6120198
STD-F0 SWGR3	Black-grey	1	11.800	6120200
STD-F0 AL3	Aluminium painted	1	11.800	6120201

PC Polycarbonate

Socket with earthing pin triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, encoded version, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO1	Signal red	1	4.000	6120312

PC Polycarbonate

Socket with earthing pin single 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, with earthing pin, encoded version, double



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO2	Signal red	1	7.800	6120314

PC Polycarbonate


Socket with earthing pin double 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, with earthing pin, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO3	Signal red	1	11.800	6120316

PC Polycarbonate

Socket with earthing pin triple 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.




Encoding pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CST-STD	Black	10	0.200	6120799

PC Polycarbonate

Encoding pin as socket attachment for the use of encoded sockets, type STD.




Strain relief for Modul 45 sockets 0°


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ZL-STD 0	Black	1	1.800	6120782

PC Polycarbonate

Strain relief for Modul 45 sockets, type STD, connectable at side, for the fastening of a 3-core cable, max. Ø 10 mm, suitable for protective contact sockets at direction of insertion 0° and sockets with earthing pin at direction of insertion 0°.



Socket 33°, with earthing pin, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW1	Pure white	1	3.800	6120222
STD-F3 ROR1	Pure orange	1	3.800	6120224
STD-F3 MZGN1	Mint green	1	3.800	6120226
STD-F3 SRO1	Signal red	1	3.800	6120228
STD-F3 SWGR1	Black-grey	1	3.800	6120230
STD-F3 AL1	Aluminium painted	1	3.800	6120232

PC Polycarbonate

Socket with earthing pin single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW3	Pure white	1	10.500	6120262
STD-F3 ROR3	Pure orange	1	10.500	6120264
STD-F3 MZGN3	Mint green	1	10.500	6120266
STD-F3 SRO3	Signal red	1	10.500	6120268
STD-F3 SWGR3	Black-grey	1	10.500	6120270
STD-F3 AL3	Aluminium painted	1	10.500	6120272

PC Polycarbonate

Socket with earthing pin triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW2	Pure white	1	7.500	6120242
STD-F3 ROR2	Pure orange	1	7.500	6120244
STD-F3 MZGN2	Mint green	1	7.500	6120246
STD-F3 SRO2	Signal red	1	7.500	6120248
STD-F3 SWGR2	Black-grey	1	7.500	6120250
STD-F3 AL2	Aluminium painted	1	7.500	6120252

PC Polycarbonate

Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, encoded version, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO1	Signal red	1	3.800	6120322

PC Polycarbonate

Socket with earthing pin single 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 33°, with earthing pin, encoded version, double



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO2	Signal red	1	7.500	6120324



PC Polycarbonate

Socket with earthing pin double 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.


Socket 33°, with earthing pin, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO3	Signal red	1	10.500	6120326
PC Polycarbonate				

Socket with earthing pin triple 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.



Connection adapter, straight, connector part GST18




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STA-SKS S1 SW	Black	10	1.200	6117192
STA-SKS S1 W	White	10	1.200	6117193

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.

Connection adapter, straight, socket part GST18




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
BTA-SKS S1 SW	Black	10	1.200	6117190
BTA-SKS S1 W	White	10	1.200	6117191

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.

Connection adapter, U-shaped, connector part GST18




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
STA-SKS SU1 SW	Black	10	1.190	6117196
STA-SKS SU1 W	White	10	1.190	6117197

PA Polyamide

Connector part adapter, U-shaped, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.

Connection adapter for Modul 45connect® sockets




Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
VB-SKS S	Black	10	0.590	6117198

PA Polyamide

Connection adapter for combining STD-D0C / STD-D3C or STD-F0C / STD-F3C sockets.

Connection adapter, GST18i, straight



Type	Colour	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
VB-G GST18i3p	Black	10	1.760	6108045

PA Polyamide

Connection adapter GST18i for combining STD-D0C / STD-D3C or STD-F0C / STD-F3C sockets together with straight connection adapters, pluggable connection with integrated strain relief. Suitable for device connections in the device installation trunking systems Rapid 45 and Rapid 80 and in ISS service poles.


Connector part 3-pin, spring power connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-F GST18i3p SW	Black	1	2.600	6108050
ST-F GST18i3p W	White	1	2.620	6108051

Connector part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm




Connector part, 3-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i3p SW	Black	1	2.030	6108054
ST-S GST18i3p W	White	1	2.030	6108055

Connector part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm




Connector part, 3-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S4 GST18i3 SW	Black	1	1.600	6108060
ST-S4 GST18i3 W	White	1	1.600	6108062

PA Polyamide

Connector part, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.




Socket section 3-pin, spring power connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-F GST18i3p SW	Black	1	2.620	6108052
BT-F GST18i3p W	White	1	2.690	6108053

Socket part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm




Socket section 3-pin, screw connection


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i3p SW	Black	1	2.150	6108056
BT-S GST18i3p W	White	1	2.150	6108057

Socket part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm



Socket section 3-pin, screw connection




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
BT-S4 GST18i3 SW	Black	1	1.600	6108064
BT-S4 GST18i3 W	White	1	1.600	6108066

PA Polyamide

Socket section, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and for cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Distributor block, 3-pole




Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
VB-2 GST18i3p	Black	1	3.300	6108086

PA Polyamide

Distributor block with lock, type GST18i, 1 input with 3-pin plug section and 2 outputs with 3-pin socket section.


Distributor block 3-pin, 1E/3A



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
VB-3 GST18i3p	Black	1	3.590	6108080

Distributor block with lock, type GST18i, one input with plug section 3-pin and three outputs with socket section 3-pin.


Distributor block 3-pin, 1E/5A



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
VB-5 GST18i3p	Black	1	5.590	6108082

Distributor block with lock, type GST18i, one input with plug section 3-pin and five outputs with socket section 3-pin.


Distributor block, 3-pin, T-shaped



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
VB-T GST18i3p	Black	1	2.540	6108084

T distributor with lock, type GST18i, one input with 3-pin connector part and two outputs with 3-pin socket part.

Connector part, 5-pin, screw connection



Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
ST-S GST18i5p SW	Black	1	4.330	6108070

Connector part, 5-pin, type GST18i, with screw connection for 1.5–2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5–13.5) NYM and (Ø 10.5–13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.


Stripping length: 8 mm
Jacket removal length: 46 mm

Socket section 5-pin, screw connection

Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
BT-S GST18i5p SW	Black	1	4.550	6108072

Socket part, 5-pin, type GST18i, with screw connection for 1.5 to 2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5 – 13.5) NYM and (Ø 10.5 to 13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm





Locking


Type	Colour	Pack. Weight		Item No.
		pcs	kg/100 pcs.	
VR-GST18	Black	10	0.100	6108074

PA Polyamide

Locking clip for GST18, plug connections, for locking connection cables.




3-wire connection cable, PVC, cross-section 1.5 mm², black



Type	Cable length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q1.5 1 SW	1000	Black	1	14.000	6108100
VL-3Q1.5 2 SW	2000	Black	1	28.000	6108101
VL-3Q1.5 3 SW	3000	Black	1	42.000	6108102
VL-3Q1.5 4 SW	4000	Black	1	56.000	6108103
VL-3Q1.5 5 SW	5000	Black	1	70.000	6108104
VL-3Q1.5 6 SW	6000	Black	1	84.000	6108105
VL-3Q1.5 7 SW	7000	Black	1	98.000	6108106
VL-3Q1.5 8 SW	8000	Black	1	112.000	6108107
VL-3Q1.5 9 SW	9000	Black	1	126.000	6108108
VL-3Q1.5 10 SW	10000	Black	1	140.000	6108109

Connection cable 3 x 1.5 mm² in the version socket – connector with GST18i connection system.


3-wire connection cable, PVC, cross-section 1.5 mm², white



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q1.5 1 W	White	1	14.000	6108125
VL-3Q1.5 2 W	White	1	28.000	6108126
VL-3Q1.5 3 W	White	1	42.000	6108127
VL-3Q1.5 4 W	White	1	56.000	6108128
VL-3Q1.5 5 W	White	1	70.000	6108129
VL-3Q1.5 6 W	White	1	84.000	6108130
VL-3Q1.5 7 W	White	1	98.000	6108131
VL-3Q1.5 8 W	White	1	112.000	6108132
VL-3Q1.5 9 W	White	1	126.000	6108133
VL-3Q1.5 10 W	White	1	140.000	6108134

Connection cable 3 x 1.5 mm² in the version socket – connector with GST18i connection system.


3-wire connection cable, PVC, cross-section 2.5 mm², black



Type	Cable length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 SW	1000	Black	1	18.000	6108150
VL-3Q2.5 2 SW	2000	Black	1	36.000	6108151
VL-3Q2.5 3 SW	3000	Black	1	54.000	6108152
VL-3Q2.5 4 SW	4000	Black	1	72.000	6108153
VL-3Q2.5 5 SW	5000	Black	1	90.000	6108154
VL-3Q2.5 6 SW	6000	Black	1	108.000	6108155
VL-3Q2.5 7 SW	7000	Black	1	126.000	6108156
VL-3Q2.5 8 SW	8000	Black	1	144.000	6108157
VL-3Q2.5 9 SW	9000	Black	1	162.000	6108158
VL-3Q2.5 10 SW	10000	Black	1	180.000	6108159

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

3-wire connection cable, PVC, cross-section 2.5 mm², white




Type	Cable length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 W	1000	White	1	18.000	6108175
VL-3Q2.5 2 W	2000	White	1	36.000	6108176
VL-3Q2.5 3 W	3000	White	1	54.000	6108177
VL-3Q2.5 4 W	4000	White	1	72.000	6108178
VL-3Q2.5 5 W	5000	White	1	90.000	6108179
VL-3Q2.5 6 W	6000	White	1	108.000	6108180
VL-3Q2.5 7 W	7000	White	1	126.000	6108181
VL-3Q2.5 8 W	8000	White	1	144.000	6108182
VL-3Q2.5 9 W	9000	White	1	162.000	6108183
VL-3Q2.5 10 W	10000	White	1	180.000	6108184

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

3-wire connection cable, halogen-free, cross-section 2.5 mm², black

Type	Cable length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 SW	1000	Black	1	16.000	6108450
VL-3Q2.5 H2 SW	2000	Black	1	32.000	6108451
VL-3Q2.5 H3 SW	3000	Black	1	48.000	6108452
VL-3Q2.5 H4 SW	4000	Black	1	64.000	6108453
VL-3Q2.5 H5 SW	5000	Black	1	80.000	6108454
VL-3Q2.5 H6 SW	6000	Black	1	96.000	6108455
VL-3Q2.5 H7 SW	7000	Black	1	112.000	6108456
VL-3Q2.5 H8 SW	8000	Black	1	128.000	6108457
VL-3Q2.5 H9 SW	9000	Black	1	144.000	6108458
VL-3Q2.5 H10 SW	10000	Black	1	160.000	6108459



Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.


3-wire connection cable, halogen-free, cross-section 2.5 mm², white

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 W	White	1	16.000	6108475
VL-3Q2.5 H2 W	White	1	32.000	6108476
VL-3Q2.5 H3 W	White	1	48.000	6108477
VL-3Q2.5 H4 W	White	1	64.000	6108478
VL-3Q2.5 H5 W	White	1	80.000	6108479
VL-3Q2.5 H6 W	White	1	96.000	6108480
VL-3Q2.5 H7 W	White	1	112.000	6108481
VL-3Q2.5 H8 W	White	1	128.000	6108482
VL-3Q2.5 H9 W	White	1	144.000	6108483
VL-3Q2.5 H10 W	White	1	160.000	6108484



Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

Socket 0°, Connect 45, protective contact, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW1	Pure white	1	6.700	6120340
STD-D0C ROR1	Pure orange	1	6.700	6120344
STD-D0C MZGN1	Mint green	1	6.700	6120346
STD-D0C SRO1	Signal red	1	6.700	6120348
STD-D0C SWGR1	Black-grey	1	6.700	6120350
STD-D0C AL1	Aluminium painted	1	6.700	6120352

PC Polycarbonate

Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking system.

Socket 0°, Connect 45, protective contact, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW2	Pure white	1	10.100	6120362
STD-D0C ROR2	Pure orange	1	10.100	6120364
STD-D0C MZGN2	Mint green	1	10.100	6120366
STD-D0C SRO2	Signal red	1	10.100	6120368
STD-D0C SWGR2	Black-grey	1	10.100	6120370
STD-D0C AL2	Aluminium painted	1	10.100	6120372

PC Polycarbonate

Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, protective contact, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW3	Pure white	1	16.500	6120382
STD-D0C ROR3	Pure orange	1	16.500	6120384
STD-D0C MZGN3	Mint green	1	16.500	6120386
STD-D0C SRO3	Signal red	1	16.500	6120388
STD-D0C SWGR3	Black-grey	1	16.500	6120390
STD-D0C AL3	Aluminium painted	1	16.500	6120392

PC Polycarbonate

Protective contact socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 80, protective contact, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW1	Pure white	1	8.500	6120412
STD-D0C8 ROR1	Pure orange	1	8.500	6120414
STD-D0C8 MZGN1	Mint green	1	8.500	6120416
STD-D0C8 SRO1	Signal red	1	8.500	6120418
STD-D0C8 SWGR1	Black-grey	1	8.500	6120420
STD-D0C8 AL1	Aluminium painted	1	8.500	6120422

PC Polycarbonate


Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking system.

Socket 0°, Connect 80, protective contact, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW2	Pure white	1	13.000	6120432
STD-D0C8 ROR2	Pure orange	1	13.000	6120434
STD-D0C8 MZGN2	Mint green	1	13.000	6120436
STD-D0C8 SRO2	Signal red	1	13.000	6120438
STD-D0C8 SWGR2	Black-grey	1	13.000	6120440
STD-D0C8 AL2	Aluminium painted	1	13.000	6120442

PC Polycarbonate


Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.


Socket 0°, Connect 80, protective contact, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW3	Pure white	1	20.000	6120452
STD-D0C8 ROR3	Pure orange	1	20.000	6120454
STD-D0C8 MZGN3	Mint green	1	20.000	6120456
STD-D0C8 SRO3	Signal red	1	20.000	6120458
STD-D0C8 SWGR3	Black-grey	1	20.000	6120460
STD-D0C8 AL3	Aluminium painted	1	20.000	6120462

PC Polycarbonate


Protective contact socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.


Socket 33°, Connect 45, protective contact, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW2	Pure white	1	8.500	6120482
STD-D3C ROR2	Pure orange	1	8.500	6120484
STD-D3C MZGN2	Mint green	1	8.500	6120486
STD-D3C SRO2	Signal red	1	8.500	6120488
STD-D3C SWGR2	Black-grey	1	8.500	6120490
STD-D3C AL2	Aluminium painted	1	8.500	6120492

PC Polycarbonate


Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.


Socket 33°, Connect 45, protective contact, triple


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW3	Pure white	1	11.500	6120502
STD-D3C ROR3	Pure orange	1	11.500	6120504
STD-D3C MZGN3	Mint green	1	11.500	6120506
STD-D3C SRO3	Signal red	1	11.500	6120508
STD-D3C SWGR3	Black-grey	1	11.500	6120510
STD-D3C AL3	Aluminium painted	1	11.500	6120512

PC Polycarbonate

Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



Socket 0°, Connect 45, with earthing pin, single




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW1	Pure white	1	6.500	6120532
STD-F0C ROR1	Pure orange	1	6.500	6120534
STD-F0C MZGN1	Mint green	1	6.500	6120536
STD-F0C SRO1	Signal red	1	6.500	6120538
STD-F0C SWGR1	Black-grey	1	6.500	6120540
STD-F0C AL1	Aluminium painted	1	6.500	6120542

PC Polycarbonate

Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW2	Pure white	1	9.900	6120552
STD-F0C ROR2	Pure orange	1	9.900	6120554
STD-F0C MZGN2	Mint green	1	9.900	6120556
STD-F0C SRO2	Signal red	1	9.900	6120558
STD-F0C SWGR2	Black-grey	1	9.900	6120560
STD-F0C AL2	Aluminium painted	1	9.900	6120562

PC Polycarbonate

Earthing pin socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW3	Pure white	1	13.900	6120572
STD-F0C ROR3	Pure orange	1	13.900	6120574
STD-F0C MZGN3	Mint green	1	13.900	6120576
STD-F0C SRO3	Signal red	1	13.900	6120578
STD-F0C SWGR3	Black-grey	1	13.900	6120580
STD-F0C AL3	Aluminium painted	1	13.900	6120582

PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW1	Pure white	1	8.500	6120602
STD-F0C8 ROR1	Pure orange	1	8.500	6120604
STD-F0C8 MZGN1	Mint green	1	8.500	6120606
STD-F0C8 SRO1	Signal red	1	8.500	6120608
STD-F0C8 SWGR1	Black-grey	1	8.500	6120610
STD-F0C8 AL1	Aluminium painted	1	8.500	6120612

PC Polycarbonate


Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW2	Pure white	1	13.000	6120622
STD-F0C8 ROR2	Pure orange	1	13.000	6120624
STD-F0C8 MZGN2	Mint green	1	13.000	6120626
STD-F0C8 SRO2	Signal red	1	13.000	6120628
STD-F0C8 SWGR2	Black-grey	1	13.000	6120630
STD-F0C8 AL2	Aluminium painted	1	13.000	6120632

PC Polycarbonate

Earthing pin socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.




Socket 0°, Connect 80, with earthing pin, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW3	Pure white	1	17.500	6120642
STD-F0C8 ROR3	Pure orange	1	17.500	6120644
STD-F0C8 MZGN3	Mint green	1	17.500	6120646
STD-F0C8 SRO3	Signal red	1	17.500	6120648
STD-F0C8 SWGR3	Black-grey	1	17.500	6120650
STD-F0C8 AL3	Aluminium painted	1	17.500	6120652

PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.




Socket 33°, Connect 45, with earthing pin, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3C RW2	Pure white	1	8.500	6120672
STD-F3C ROR2	Pure orange	1	8.500	6120674
STD-F3C MZGN2	Mint green	1	8.500	6120676
STD-F3C SRO2	Signal red	1	8.500	6120678
STD-F3C SWGR2	Black-grey	1	8.500	6120680
STD-F3C AL2	Aluminium painted	1	8.500	6120682

PC Polycarbonate

Socket with earthing pin and side connection, double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.




Socket 33°, Connect 45, with earthing pin, triple


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3C RW3	Pure white	1	11.500	6120692
STD-F3C ROR3	Pure orange	1	11.500	6120694
STD-F3C MZGN3	Mint green	1	11.500	6120696
STD-F3C SRO3	Signal red	1	11.500	6120698
STD-F3C SWGR3	Black-grey	1	11.500	6120700
STD-F3C AL3	Aluminium painted	1	11.500	6120702

PC Polycarbonate

Socket with earthing pin and side connection, triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.



CP empty housing



Type



CP45-LG 8A

SI Steel

Consolidation Point empty housing for the installation of 4 Modul 45 accessories (expandable to max. eight Modul 45 accessories), consisting of housing base and cover, a cover hood to separate data technology and heavy current, two support plates for the installation of two Modul 45 accessories each, two blanking plates, two cable glands V-TEC M25 and a protective conductor connection bracket.

Pack. pcs	Weight		Item No.
	kg/100 pcs.	pcs.	
1	190.000		6108037

CP support plate, for Modul 45® devices, double



Type


CP45-TP M

SI Steel

Support plate to accept two Modul 45 devices in a Consolidation Point housing.

Pack. pcs	Weight		Item No.
	kg/100 pcs.	pcs.	
1	4.200		6108039

CP support plate for 3 snap-in plug connectors, 3-pole



Type



CP45-TP 3SI

SI Steel

Support plate to accept three snap-In connectors, 3-pole, in a Consolidation Point housing.

Pack. pcs	Weight		Item No.
	kg/100 pcs.	pcs.	
1	6.200		6108024

CP support plate for 4 snap-in plug connectors, 3-pole



Type


CP45-TP 4SI

SI Steel

Support plate to accept four snap-In connectors, 3-pole, in a Consolidation Point housing.

Pack. pcs	Weight		Item No.
	kg/100 pcs.	pcs.	
1	5.700		6108026

CP support plate, for 8 data connection modules, type C




Type

CP45-TP 8C

SI Steel

Support plate, type C, to accept eight data connection modules in a Consolidation Point housing. Type C has a mounting opening of 19.30 x 14.80 mm.

Support plate type C is suitable for accepting the following data connection modules: BTR (Keystone design): Cat.6A Modul und UAE Modul; Corning: Modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat.6A, Fixlink Keystone Cat.6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 socket modules Keystone; OBO: Data connection modules snap-In type ASM-C5 S, ASM-C5 GS, ASM-C6 S, ASM-C6 GS and Keystone type ASM-C6A, ASM-C6A G; R&M: Cat.6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.





Pack. pcs	Weight		Item No.
	kg/100 pcs.	pcs.	
1	5.400		6108028

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-KL	Black	1	2.000	6108043




Screwless terminal strip with locking foot, 5-pin for a cable cross-section of 0.5–4 mm².

Terminal strip

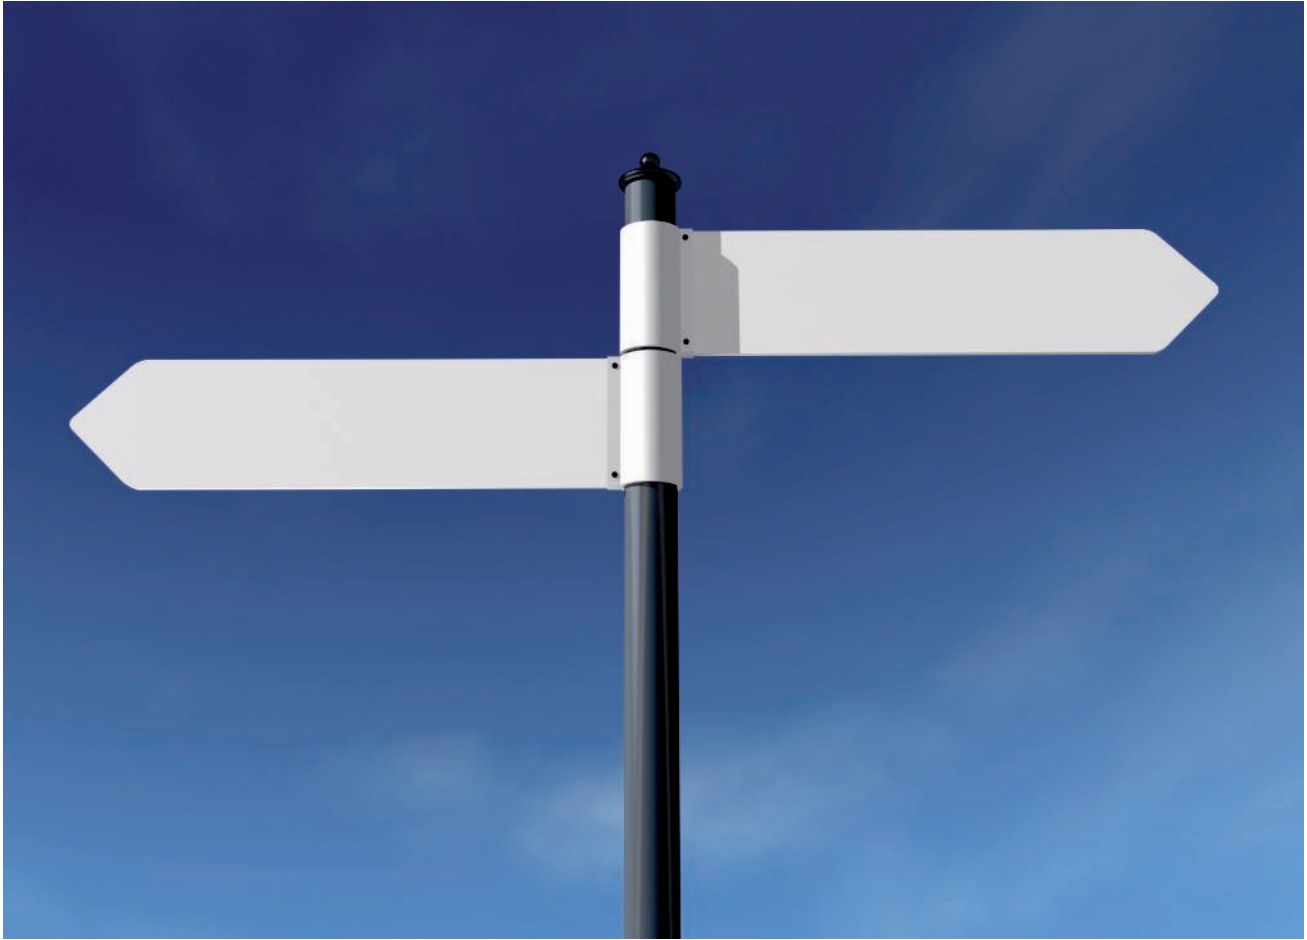



Directories

	Numeric directory	390
	Type listing	397
	Terms and conditions of sale and delivery	416



GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
	price/100			/m			/m			/pc.			/pc.	
5044291	1115057	131	6024315	6023096	58	6667697	6027016	38	5899341	6104877	352	5900115	6105234	363
5044352	1115065	131	6024377	6023118	58	6667758	6027024	39	5899372	6104880	352	5900177	6105237	363
5045434	1115650	131		/pc.		6667819	6027032	40	5899389	6104886	353	5900184	6105240	363
5045496	1115669	132	6024438	6023126	53	6667871	6027040	42	5899396	6104889	353	6102051	6105250	359
	/100 pc.		6024551	6023142	40	6667994	6027105	44	5899402	6104892	353	6102068	6105252	359
5669197	2351056	61	6024919	6023207	58	6668052	6027113	45	5899648	6104922	353	6102099	6105254	359
	/pc.		6025039	6023223	44	6668113	6027121	48	5899709	6104925	353	6102105	6105258	360
5080886	5092451	341	6025459	6023312	39	6668175	6027148	50	5899754	6104928	353	6102112	6105260	360
5475804	5092466	341	6025572	6023339	42	6668236	6027156	51	5899808	6104934	353	6102129	6105262	360
	/m					6668298	6027164	52	5899853	6104937	353	6102150	6105270	360
6362530	6020801	104	6027132	6024009	61	6668359	6027172	53	5899884	6104940	353	6102167	6105272	360
6016273	6020887	39	6027255	6024025	61	6668410	6027180	47	5899921	6104946	354	6102174	6105274	360
6016334	6020895	40	6027316	6024033	61	6668472	6027229	54	5899938	6104949	354	6164752	6105282	360
6016396	6020909	42	6638116	6024432	51	6668533	6027237	55	5899945	6104952	354	6164769	6105284	360
			6639496	6024440	47	6668595	6027245	56	5899976	6104958	355	6164790	6105286	360
6016877	6021018	40	6027491	6024467	54	6668656	6027253	57	5899983	6104961	355	6594603	6105300	340
6016990	6021034	42	6027552	6024475	55				5899990	6104964	355	6594641	6105302	340
			6027613	6024483	56	6669257	6028152	62	5900047	6104970	355	6594665	6105304	340
6017171	6021093	40	6502097	6024505	57	6773893	6028187	62	5900108	6104973	355			
6017652	6021190	40	6638291	6024521	51				5900122	6104976	355	5699767	6107801	341
6018253	6021336	40	6639670	6024548	47	6628216	6028403	19	5900160	6104982	355			
6018857	6021492	39	6027675	6024564	54	6628278	6028411	19	5900214	6104985	355	6584758	6108024	386
6018918	6021506	41	6027736	6024572	55				5900221	6104988	355	6584765	6108026	386
6018970	6021514	43	6027798	6024580	56	5898023	6104610	354	5900238	6104994	355	6584796	6108028	386
6019212	6021697	39	6638475	6024599	51	5898061	6104613	354	5900245	6104997	355	5577942	6108037	386
6019274	6021700	42	6639854	6024602	47	5898085	6104616	354				5577959	6108039	386
6019335	6021719	39	6027859	6024610	54	5898122	6104622	354	5900283	6105000	355	5577980	6108043	387
6019397	6021727	42	6027910	6024629	55	5898139	6104625	354	5900290	6105006	355	5896975	6108045	376
6019458	6021735	39	6027972	6024637	56	5898146	6104628	354	5900306	6105009	355	5273530	6108050	377
6019519	6021743	42	6501311	6024653	57	5898177	6104634	352	5900337	6105012	355	5273547	6108051	377
			6501915	6024688	57	5898191	6104637	352	5900344	6105018	358	5273585	6108052	377
			6501670	6024718	57	5898245	6104640	352	5900351	6105021	358	5273592	6108053	377
			6638659	6024769	51	5898269	6104646	352	5900368	6105024	358	5273608	6108054	377
			6640034	6024777	47	5898313	6104649	352	5900405	6105030	358	5273646	6108055	377
			6028030	6024793	54	5898320	6104652	352	5900412	6105033	358	5273653	6108056	377
			6028092	6024807	55	5898375	6104658	354	5900429	6105036	358	5273660	6108057	377
			6028153	6024815	56	5898436	6104661	354	5900467	6105042	356	6584680	6108060	377
			6637935	6024823	51	5898443	6104664	354	5900474	6105045	356	6584697	6108062	377
			6639311	6024831	47	5898481	6104670	354	5900481	6105048	356	6584703	6108064	378
			6028214	6024858	54	5898498	6104673	354	5900511	6105054	356	6584734	6108066	378
			6028276	6024874	55	5898504	6104676	354	5900528	6105057	356	5273707	6108070	378
			6028337	6024882	56	5898535	6104682	352	5900535	6105060	356	5273714	6108072	379
			6651375	6024904	57	5898542	6104685	352	5900542	6105066	356	6584741	6108074	379
						5898559	6104688	352	5900559	6105069	356	5273721	6108080	378
						5898566	6104694	352	5900566	6105072	356	5273769	6108082	378
						5898573	6104697	352	5900573	6105078	356	5273776	6108084	378
						5898580	6104700	352	5900580	6105081	356	6584673	6108086	378
						5898597	6104706	363	5900597	6105084	356	5122326	6108100	380
						5898603	6104709	363	5900603	6105090	359	5122333	6108101	380
						5898610	6104712	363	5900641	6105093	359	5122340	6108102	380
						5898627	6104718	363	5898900	6105096	359	5122388	6108103	380
						5898634	6104721	363	5898948	6105102	359	5122395	6108104	380
						5898641	6104724	363	5898962	6105105	359	5122401	6108105	380
						5898658	6104730	361	5898986	6105108	359	5122449	6108106	380
						5898665	6104733	361	5899037	6105114	356	5122456	6108107	380
						5898672	6104736	361	5899075	6105117	356	5122463	6108108	380
						5898689	6104742	361	5899099	6105120	356	5122500	6108109	380
						5898696	6104745	361	5899136	6105126	357	5122692	6108125	380
						5898702	6104748	361	5899143	6105129	357	5122708	6108126	380
						5898719	6104754	361	5899167	6105132	357	5122746	6108127	380
						5898726	6104757	361	5899204	6105138	357	5122753	6108128	380
						5898733	6104760	361	5899228	6105141	357	5122760	6108129	380
						5898740	6104766	361	5899259	6105144	357	5122807	6108130	380
						5898757	6104769	361	5899273	6105150	357	5122814	6108131	380
						5898764	6104772	361	5899457	6105153	357	5122821	6108132	380
						5898771	6104778	363	5899464	6105156	357	5122869	6108133	380
						5898788	6104781	363	5899501	6105162	357	5122876	6108134	380
						5898795	6104784	363	5899525	6105165	357	5123064	6108150	380
						5898849	6104790	363	5899570	6105168	357	5123101	6108151	380
						5898856	6104793	363	58996					

GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
5123538	6108182	380	6419333	6113100	145	6451197	6114320	188	5696988	6119214	344	5889205	6119415	326
5123545	6108183	380	6419340	6113102	145	6451241	6114340	188	5696995	6119216	344	5889243	6119421	327
5123552	6108184	380	6418176	6113104	159	6451296	6114360	189	5697008	6119218	344	5889250	6119422	327
5124368	6108450	381	6419357	6113110	145	6451319	6114370	189	5697015	6119220	350	5889267	6119423	327
5124375	6108451	381	6419371	6113112	145	6451364	6114380	189	5697022	6119222	350	5889298	6119427	326
5124382	6108452	381	6418206	6113114	159				5697039	6119224	350	5889304	6119428	326
5124429	6108453	381							5697046	6119226	351	5889311	6119429	326
5124436	6108454	381	6419388	6113200	147	5914075	6115775	266	5697053	6119228	351	5889328	6119433	327
5124443	6108455	381	6419395	6113202	147				5697060	6119230	351	5889359	6119434	327
5124481	6108456	381							5697077	6119232	350	5889366	6119435	327
5124498	6108457	381	6419418	6113210	147	5914211	6115789	266	5697084	6119234	350	6609963	6119483	327
5124504	6108458	381	6419432	6113212	147	5914150	6115825	266	5697121	6119236	350	6609994	6119485	328
5124542	6108459	381	6418268	6113214	161	5914174	6115835	266	5697138	6119238	348	6410415	6119490	330
5124733	6108475	381	6419456	6113220	148	5914198	6115845	266	5697145	6119240	348	6410439	6119492	330
5124740	6108476	381	6419463	6113222	148	5914235	6115851	267	5697183	6119242	348	6439041	6119494	330
5124788	6108477	381	6419470	6113230	148	5914259	6115855	267	5697190	6119244	348			
5124795	6108478	381	6419500	6113232	148	5914273	6115865	267	5697206	6119246	348	6049134	6120001	364
5124801	6108479	381	6418305	6113234	162	5914310	6115875	267	5697244	6119248	348	6049127	6120003	364
5124832	6108480	381	6419517	6113240	147	5914334	6115885	268	5697251	6119250	344	6049189	6120005	364
5124849	6108481	381	6419531	6113242	147	5914358	6115895	268	5697268	6119252	344	6046966	6120008	368
5124856	6108482	381	6419555	6113250	147	5914372	6115915	268	5697305	6119254	344	6046973	6120010	368
5124863	6108483	381	6419562	6113252	147	5914396	6115925	268	5697312	6119256	350	6047024	6120012	368
5124894	6108484	381	6418312	6113254	161	5914419	6115935	268	5697329	6119258	350	6047031	6120014	368
			6419586	6113260	147	5914433	6115945	268	5697374	6119260	350	6047086	6120016	368
6417902	6112400	158	6419609	6113262	147	5914457	6115955	269	5697381	6119262	351	6047093	6120018	368
6417919	6112403	158	6419616	6113270	147	5914471	6115965	269	5697428	6119264	351	6047109	6120022	368
6417926	6112410	159	6419630	6113272	147	5914495	6115975	269	5697435	6119266	351	6047130	6120024	368
6417933	6112413	159	6418374	6113274	161	5914501	6115980	269	5697442	6119268	350	6047147	6120026	368
			6419647	6113280	148	5914518	6115982	269	5697480	6119270	350	6047154	6120028	368
			6419661	6113282	148	5914525	6115985	269	5697497	6119272	350	6047208	6120030	368
6417964	6112420	159	6418381	6113284	162	5914532	6115995	269	5887331	6119280	349	6047222	6120032	368
6417971	6112423	159							5887348	6119282	349	6047260	6120042	368
6417995	6112430	158	6419685	6113290	146				5887379	6119284	349	6047277	6120044	368
6418008	6112433	158				5391630	6116073	153	5887386	6119286	350	6047321	6120046	368
6418022	6112440	158	6419814	6113300	148	6708970	6116108	154	5887393	6119288	350	6047345	6120048	368
6418039	6112443	158	6419821	6113302	148				5887409	6119290	350	6047383	6120050	368
			6418411	6113304	162	6176236	6116116	154	5887430	6119292	344	6047390	6120052	368
6418213	6112500	161	6419845	6113310	145	5481485	6116152	153	5887447	6119294	344	6047444	6120072	370
6418251	6112503	161	6419869	6113312	145	5391647	6116163	153	5887454	6119296	344	6047468	6120074	370
			6418398	6113314	159	5391654	6116193	154	5888024	6119298	344	6047505	6120076	370
6418275	6112510	162	6419876	6113320	148	5428688	6116201	153	5887492	6119300	344	6047512	6120078	370
6418299	6112513	162	6419883	6113322	148	5391661	6116203	153	5887508	6119302	344	6047529	6120080	370
6418329	6112520	161	6418428	6113324	162	5428695	6116261	154	5925491	6119304	351	6047567	6120082	370
6418336	6112523	161				5391678	6116263	154	5925507	6119306	351	6047574	6120102	370
6418350	6112530	161	6419913	6113400	150	5391685	6116403	154	5925538	6119308	351	6047581	6120104	370
6418367	6112533	161	6419920	6113402	150	5391692	6116493	153	5889373	6119319	327	6047628	6120106	370
									5888789	6119322	331	6047635	6120108	370
6418503	6112600	164	6419937	6113410	151	5438069	6117190	376	5888796	6119324	331	6047680	6120110	370
6418534	6112603	164	6419944	6113412	151	5483540	6117191	376	5888802	6119326	331	6047703	6120112	370
			6419975	6113420	151	5438090	6117192	376	5888819	6119332	331	6047764	6120122	370
6418558	6112610	165	6419982	6113422	151	5483571	6117193	376	5888826	6119334	331	6047871	6120124	370
6418541	6112613	165	6418565	6113424	165	5670933	6117196	376	5888833	6119336	331	6047925	6120126	370
6418572	6112620	164	6419999	6113430	150	5670940	6117197	376	5896791	6119338	331	6047949	6120128	370
6418596	6112623	164	6420001	6113432	150	5438113	6117198	376	5896807	6119339	331	6047987	6120130	370
6418619	6112630	164	6420032	6113440	150	5008866	6117200	337	5896814	6119340	331	6047994	6120132	370
6418626	6112633	164	6420049	6113442	150	5462231	6117202	337	5888840	6119342	332	6048045	6120152	372
			6418602	6113444	164	5616016	6117203	337	5888871	6119344	332	6048052	6120154	372
			6420056	6113450	150	6235155	6117325	345	5888888	6119346	332	6048069	6120155	372
6419036	6113000	144	6420063	6113452	150	6235216	6117329	345	5888895	6119352	332	6048113	6120158	372
6419074	6113002	144	6420094	6113460	150	6235278	6117337	345	5888901	6119354	332	6048168	6120160	372
6419081	6113010	145	6420100	6113462	150	6235339	6117341	345	5888932	6119356	332	6048175	6120162	372
6419104	6113012	145	6418633	6113464	164	5887515	6117346	346	5888949	6119362	332	6048182	6120172	372
			6420117	6113470	151	5887522	6117348	346	5888956	6119364	332	6048229	6120174	372
6419111	6113020	144	6420124	6113472	151	6117499	6117406	364	5888963	6119366	332	6048236	6120176	372
6419142	6113022	144	6418657	6113474	165	5701279	6117407	364	5888994	6119372	333	6048243	6120178	372
6419140	6113024	158	6420155	6113480	151	6214037	6117408	364	5889007	6119374	333	6048281	6120180	372
6419159	6113030	146	6420162	6113482	151	6164813	6117410	364	5889014	6119376	333	6048298	6120182	372
6419166	6113032	146	6418664	6113484	165	6164820	6117411	364	5889021	6119382	333	6048304	6120192	372
6419157	6113034	160				6164851	6117412	364	5889038	6119384	333	6048342	6120194	372
6419173	6113040	145				6117550	6117414	364	5889045	6119386	333	6048359	6120196	372
6419197	6113042	145	6450824	6114200	184	5701286	6117415	364	5983309	6119387	333	6048366	6120198	372
6419203	6113050	145	6450831	6114210	184	6215652	6117416	364	5983316	6119388	333	6048397	6120200	372
6419210	6113052	145				6133833	6117420	364	5983323	6119389	333	6048403	6120201	372
6417988	6113054	159	6450848	6114220	185	6133840	6117421	364	5889052	6119392	336	6048540	6120222	374
6419227	6113060	144	6450893	6114230	185	6133857	6117422	364	5889069	6119394	336	6048649	6120224	374
6419234	6113062	144	6450909	6114240	185	6117611	6117465	341	5889076	6119396	336	6048700	6120226	374
6419258	6113070	144	6450930	6114250	185	6117673	6117473	341	5889113	6119401	326	6048717	6120228	374
6419265	6113072													

GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
	/pc.			/pc.			/m			/pc.			/pc.	
6048946	6120252	374	6051090	6120582	384	6507191	6150632	34	6583096	6158668	38	6108435	6161707	54
6048953	6120262	374	6051335	6120602	384	6975686	6150640	34	6641710	6158676	37	6108497	6161715	55
6048991	6120264	374	6051342	6120604	384	6098170	6150756	20	6642618	6158692	24	6108558	6161758	56
6049004	6120266	374	6051359	6120606	384	6492251	6150764	20	6434473	6158706	29	6501250	6161774	57
6049011	6120268	374	6051397	6120608	384	6508037	6150772	22	6434534	6158714	26	6580453	6161901	29
6049028	6120270	374	6051403	6120610	384	6491773	6150780	22	6434596	6158722	28	6580637	6161928	25
6049066	6120272	374	6051427	6120612	384				6434657	6158730	33	6580811	6161936	27
6049073	6120292	368	6051458	6120622	385				6434718	6158749	35	6580996	6161944	33
6049141	6120294	368	6051465	6120624	385	6098293	6152007	20	6584178	6158765	36	6581177	6161952	35
6049196	6120296	369	6051472	6120626	385	6098354	6152015	22	6583270	6158773	38	6581535	6161979	36
6049240	6120302	370	6051519	6120628	385	6507610	6152031	25	6643158	6158781	30	6641956	6161987	37
6049257	6120304	370	6051526	6120630	385	6098477	6152058	27	6434831	6158803	37	6581719	6161995	38
6049264	6120306	371	6051540	6120632	385	6507375	6152082	34	6507559	6158838	25			
6049301	6120312	372	6051571	6120642	385	6507252	6152104	31	6507498	6158846	27	6108619	6162002	39
6049318	6120314	372	6051588	6120644	385	6098712	6152309	20	6507436	6158889	34	6108671	6162010	40
6049363	6120316	373	6051595	6120646	385	6098774	6152317	22				6108732	6162029	42
6049424	6120322	374	6051632	6120648	385	6507795	6152384	32	6103997	6159370	59	6108978	6162207	44
6049493	6120324	374	6051649	6120650	385	6099139	6152600	20				6109036	6162215	45
6049547	6120326	375	6051663	6120652	385	6099191	6152619	22	6577637	6160018	29	6109098	6162223	48
6049387	6120340	382	6048410	6120672	385	6507733	6152686	31	6577811	6160026	25	6109159	6162231	50
6049431	6120344	382	6048427	6120674	385				6577996	6160034	27	6109210	6162258	52
6049486	6120346	382	6048465	6120676	385	6099559	6153003	20	6578177	6160042	33	6109272	6162266	53
6049509	6120348	382	6048472	6120678	385	6099610	6153011	22	6578351	6160050	34	6638710	6162274	51
6049554	6120350	382	6048489	6120680	385	6507917	6153089	31	6578719	6160077	36	6640096	6162290	47
6049608	6120352	382	6048526	6120682	385	6099979	6153291	20	6641413	6160085	37	6109333	6162401	54
6049615	6120362	382	6048533	6120692	385	6804498	6153305	22	6584598	6160093	38	6109395	6162428	55
6049622	6120364	382	6048588	6120694	385	6507856	6153372	31	6105915	6160107	39	6109456	6162452	56
6049660	6120366	382	6048595	6120696	385	6100392	6153593	21	6105977	6160115	40	6501618	6162479	57
6049677	6120368	382	6048601	6120698	385	6100453	6153607	23	6106035	6160123	42	6643219	6162487	30
6049721	6120370	382	6048656	6120700	385	6507672	6153674	32	6106271	6160301	44	6642670	6162495	24
6049738	6120372	382	6048663	6120702	385				6106332	6160328	45	6583454	6162509	29
6049745	6120382	382	6049851	6120722	337	6492138	6154026	20	6106394	6160336	48	6583577	6162517	26
6049783	6120384	382	6049868	6120724	337	6491650	6154034	22	6106455	6160344	50	6583690	6162525	28
6049790	6120386	382	6049899	6120726	338	6974481	6154069	31	6106516	6160352	52	6583812	6162533	33
6049974	6120388	382	6049905	6120728	338	6491957	6154115	20	6106578	6160360	53	6583935	6162541	35
6050024	6120390	382	6049912	6120730	338	6491476	6154123	22	6638178	6160379	51	6584239	6162576	36
6050031	6120392	382	6049967	6120732	338	6493272	6154166	32	6639557	6160395	47	6641239	6162584	37
6050154	6120412	382	6049981	6120734	338	6491896	6154212	20	6106639	6160484	54	6583331	6162592	38
6050208	6120414	382	6050017	6120736	338	6491414	6154220	22	6106691	6160492	55	6109517	6162606	39
6050222	6120416	382	6050079	6120738	339	6493333	6154255	31	6106752	6160522	56	6109579	6162614	41
6050253	6120418	382	6050086	6120740	339	6492077	6154328	20	6502035	6160549	57	6109630	6162622	43
6050260	6120420	382	6050109	6120742	339	6491599	6154336	22	6579013	6160603	29	6109876	6162800	44
6050277	6120422	382	6050147	6120744	339	6974542	6154360	31	6579198	6160611	25	6109937	6162819	46
6050314	6120432	383	6467822	6120746	337	6492015	6154417	20	6579372	6160638	27	6109999	6162827	49
6050321	6120434	383	6333578	6120782	369	6491537	6154425	22	6579556	6160646	33	6110056	6162835	50
6050345	6120436	383	6602889	6120797	369	6493210	6154468	31	6579730	6160654	34	6110117	6162843	52
6050376	6120438	383	6570805	6120920	342	6491834	6154514	21	6580095	6160670	36	6110179	6162851	53
6050383	6120440	383	6570812	6120922	342	6491353	6154522	23	6641598	6160689	37	6637997	6162878	51
6050390	6120442	383	6570829	6120924	342	6493395	6154557	32	6580279	6160697	38	6639373	6162886	47
6050437	6120452	383	6570836	6120926	342				6106813	6160700	39			
6050444	6120454	383	6570843	6120928	342	6543199	6156207	62	6106875	6160719	40	6110230	6163009	54
6050468	6120456	383	6570850	6120930	342	6543137	6156223	62	6106936	6160727	42	6110292	6163017	55
6050499	6120458	383	6570867	6120932	342	6543076	6156231	62	6107179	6160905	44	6110353	6163041	56
6050505	6120460	383	6570874	6120934	342				6107230	6160913	45	6651436	6163076	57
6050512	6120462	383	6570881	6120936	342	6577576	6158226	29	6107292	6160921	48			
6050550	6120482	383	6570898	6120938	342	6577750	6158234	25	6107353	6160948	50			
6050567	6120484	383	6570911	6120940	342	6577934	6158242	27	6107414	6160956	52	6438433	6168701	31
6050581	6120486	383	6570928	6120942	342	6578115	6158250	33	6107476	6160964	53	6438495	6168728	31
6050611	6120488	383	6570935	6120950	342	6578290	6158269	34	6638352	6160972	51	6801671	6168736	31
6050628	6120490	383	6570942	6120952	342	6578658	6158285	36	6639731	6160980	47	6802159	6168744	31
6050635	6120492	383	6570959	6120954	342	6578832	6158293	38						
6050673	6120502	383	6570966	6120960	342	6641352	6158307	37	6107537	6161103	54			
6050680	6120504	383	6571000	6120962	342	6578955	6158331	29	6107599	6161111	55	6111619	6169309	58
6050703	6120506	383	6571017	6120964	342	6579136	6158358	25	6107650	6161154	56	6111671	6169317	59
6050734	6120508	383	6571024	6120966	343	6579310	6158366	27	6501854	6161170	57	6111732	6169325	60
6050741	6120510	383	6571031	6120968	343	6579495	6158374	33	6581894	6161200	29	6782291	6169368	60
6050758	6120512	383	6571048	6120970	343	6579679	6158382	34	6582075	6161219	25	6111855	6169376	59
6050796	6120532	384	6571055	6120980	343	6580033	6158404	36	6582259	6161227	27	6111916	6169384	59
6050802	6120534	384	6571062	6120982										

GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
5817833	6175469	/m 71	6000050	6178001	/m 108	6014514	6178527	/pc. 130	6677474	6183085	/pc. 47	6795017	6191967	/pc. 40
5817840	6175472	72	6000173	6178003	108	6014637	6178529	130	6677535	6183123	54	6221110	6191975	42
5817857	6175475	73	6000296	6178005	108	6014750	6178535	131	6677597	6183131	55			
5812517	6175500	74	6000418	6178010	108				6677658	6183166	56	6362950	6192017	44
5812524	6175504	74	6000531	6178012	109	6014873	6178540	131	6501373	6183182	57	6799879	6192025	45
			6000654	6178014	109	6014996	6178542	131	6673391	6183212	29	6362776	6192033	48
5933946	6175540	/pc. 66	6000777	6178016	109	6015061	6178548	131	6673452	6183255	33	6362479	6192041	50
5934233	6175546	67	6000890	6178018	110				6673513	6183298	36	6800056	6192068	51
5813910	6175550	68	6001132	6178026	110	5803751	6178552	137	6673575	6183301	37	6362233	6192076	52
5813927	6175554	69	6001255	6178028	110	5803768	6178556	137	6673636	6183336	38	6795079	6192084	53
5813934	6175558	70	6001378	6178031	111	5803799	6178559	137	6673698	6183344	39	6800896	6192092	47
5813941	6175562	71	6001491	6178033	111	5803805	6178563	138	6673759	6183352	40	5042457	6192106	54
5813958	6175566	72	6001613	6178035	111	5803812	6178566	138	6673810	6183360	42	5042525	6192110	55
5813965	6175570	73	6001736	6178037	112	5803744	6178582	136	6677719	6183409	44	5042594	6192114	56
5933809	6175572	66	6001859	6178039	112	5803829	6178585	136	6677771	6183417	45	5042662	6192118	57
5934073	6175578	67	6002214	6178050	112	5803836	6178588	136	6677832	6183425	48	6795253	6192149	25
5922780	6175581	68	6002337	6178052	113				6677894	6183433	50	6494712	6192157	27
5814016	6175590	69	6002450	6178054	113	6149100	6178643	132	6677955	6183441	51	6795314	6192165	29
5814023	6175594	70	6002573	6178056	113				6678013	6183468	52	6504855	6192173	33
5814030	6175598	71	6002696	6178059	114	6017829	6178650	139	6678075	6183476	53	6795376	6192181	34
5814047	6175602	72	6002818	6178061	114				6678136	6183484	47	6795437	6192211	36
5814054	6175606	73				5981459	6178670	136	6678198	6183522	54	6497171	6192238	37
5933830	6175612	66	6008339	6178092	130	5981466	6178674	136	6678259	6183530	55	6795499	6192246	38
5934127	6175618	67				5981473	6178678	136	6678310	6183557	56	6795550	6192254	39
5922841	6175624	68	6004850	6178201	115	5981480	6178682	138	6222131	6183573	57	6795611	6192262	40
5814061	6175626	69	6004973	6178203	115	5981497	6178686	138	6673933	6183603	24	6220878	6192270	42
5814078	6175630	70	6005093	6178205	115				6673995	6183611	29	6360970	6192319	44
5814085	6175634	71	6005215	6178207	116				6674053	6183654	30	6801558	6192327	45
5814092	6175638	72	6005307	6178209	116	6674657	6182011	29	6674114	6183662	33	6354559	6192335	48
5814108	6175642	73	6005406	6178211	116	6674718	6182062	33	6674176	6183697	36	6353057	6192343	50
5933885	6175648	66	6005505	6178213	117	6674770	6182097	36	6674237	6183700	37	6492312	6192351	51
5934158	6175654	67	6005802	6178225	117	6674831	6182100	37	6674299	6183727	38	6351855	6192378	52
5922896	6175658	68	6005932	6178227	117	6674893	6182119	38	6674350	6183735	39	6795673	6192386	53
5814115	6175662	69	6006052	6178229	118	6674954	6182127	39	6674411	6183743	41	6492374	6192394	47
5814122	6175666	70	6006175	6178231	118	6675012	6182135	40	6674473	6183751	43	5042464	6192416	54
5814139	6175670	71	6006298	6178233	118	6675074	6182143	42	6678372	6183808	44	5042532	6192420	55
5814146	6175674	72	6006410	6178236	119	6675739	6182194	44	6678433	6183816	46	5042600	6192424	56
5814153	6175678	73	6009411	6178302	120	6675791	6182208	45	6678495	6183824	49	5042693	6192428	57
5933915	6175684	66	6009534	6178305	120	6675852	6182216	48	6678556	6183832	50	6796212	6192459	25
5934189	6175690	67	6009657	6178307	120	6675913	6182224	50	6678617	6183840	51	6494774	6192467	27
5922926	6175694	68	6009732	6178310	121	6675975	6182232	51	6678679	6183859	52	6796274	6192475	29
5814160	6175698	69	6009831	6178312	121	6676033	6182240	52	6678730	6183867	53	6504978	6192483	33
5814177	6175702	70	6009930	6178314	121	6676095	6182259	53	6678792	6183875	47	6796335	6192491	35
5814184	6175706	71	6010073	6178316	122	6676156	6182267	47	6678853	6183913	54	6796397	6192513	36
5814191	6175710	72	6010196	6178320	122	6676217	6182305	54	6678914	6183921	55	6497232	6192521	37
5814207	6175714	73	6010318	6178322	122	6676279	6182313	55	6678976	6183956	56	6796458	6192548	38
5814597	6175928	68	6010400	6178324	123	6676330	6182348	56	6679034	6183980	57	6796519	6192556	39
5814603	6175932	69	6010509	6178326	123	6501977	6182364	57				6796571	6192564	40
5814610	6175936	70	6010608	6178328	123	6675197	6182402	29				6500833	6192572	42
5814627	6175940	71	6010707	6178330	124	6675258	6182445	33	6794058	6191002	24	6351794	6192610	44
5814863	6175944	72	6010806	6178334	124	6675319	6182488	36	6794119	6191010	25	6492435	6192629	45
5814870	6175948	73	6010929	6178336	124	6675371	6182496	37	6494590	6191029	27	6712519	6192637	48
5922803	6175964	68	6011049	6178338	125	6675432	6182526	38	6794171	6191037	29	6712571	6192645	50
5814887	6175968	69	6011162	6178341	125	6675494	6182534	39	6496938	6191045	30	6492497	6192653	51
5814894	6175972	70				6675555	6182542	40	6505036	6191053	33	6712632	6192661	52
5814900	6175976	71	6011285	6178349	130	6675616	6182550	42	6794232	6191061	34	6796632	6192688	53
5814917	6175980	72				6676392	6182593	44	6794294	6191096	36	6492558	6192696	47
5814924	6175984	73	6013197	6178420	126	6676453	6182607	45	6497058	6191118	37	5042471	6192718	54
			6013319	6178422	126	6676514	6182615	48	6363490	6191126	38	5042549	6192722	55
5922865	6176000	68	6013432	6178424	126	6676576	6182623	50	6794355	6191134	39	5042631	6192726	56
5814955	6176004	69	6013555	6178426	127	6676637	6182631	51	6794416	6191142	40	5042709	6192730	57
5814962	6176008	70	6013678	6178428	127	6676699	6182658	52	6501199	6191150	42	6796694	6192750	25
5814979	6176012	71	6013791	6178430	127	6676750	6182666	53	6363018	6191193	44	6494835	6192769	27
5814986	6176016	72	6013913	6178435	128	6676811	6182674	47	6491292	6191207	45	6796755	6192777	29
5815020	6176020	73	6014033	6178437	128	6676873	6182712	54	6363438	6191215	48	6504916	6192785	33
5922919	6176036	68	6014156	6178439	128	6676934	6182720	55	6363377	6191223	50	6796816	6192793	34
5815037	6176040	69	6015184	6178441	129	6676996	6182747	56	6491230	6191231	51	6796878	6192815	36
5815044	6176044	70	6040209	6178480	108	6501793	6182763	57	6363193	6191258	52	6497294	6192823	37
5815075	6176048	71	6040322	6178482	108	6672851	6182801	29	6794478	6191266	53	6796939	6192831	38
5815082	6176052	72	6040445	6178484	109	6672912	6182852	33	6799459	6191274	47	6796991	6192858	39
5815099	6176056	73	6040568	6178486	109	6672974	6182887	36	5042273	6191304	54	6797059	6192866	40
5922971	6176072	68	6040681	6178488	110	6673032	6182895	37	5042280	6191312	55	6496990	6192874	42
5815105	6176076	69	6040803	6178490	110	6673094	6182917	38	5042297	6191347	56	6712694	6192912	44
5815112	6176080	70	6040926	6178492	112	6673155	6182925	39	5042303	6191355	57	6492619	6192920	45
5815129	6176084	71	6041282	6178504	120	6673216	6182933	40				6712755	6192939	48
5815136	6176088	72	6041404	6178506	120	6673278	6182941	42	6794652	6191843	25	6712816	6192947	50
5815143	6176092	73	6041527	6178508	121				6494651	6191851	27	6492671	6192955	51
			6041640	6178510	122	6677054	6183018	44	679471					

GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
5042716	6193033	57	6158713	6199448	101	6652693	6249418	82	5842705	6274374	250	5657408	6274810	277
6797172	6193099	24	6158775	6199461	101	6575350	6249426	84	5656685	6274376	172	5657415	6274811	277
6797233	6193102	26	6158959	6199467	101	6503414	6249485	85	5846666	6274410	175	5657422	6274812	277
6975624	6193110	28				6314713	6249507	88	5846673	6274411	175	5657477	6274820	277
6797295	6193129	29			/m	6314775	6249515	89	5846680	6274412	175	5657484	6274821	277
6976768	6193137	30	6651672	6246966	78	6314836	6249523	91	5846819	6274420	176	5657545	6274830	277
6504794	6193145	33	6118878	6246974	79	6503650	6249558	85	5846826	6274421	176	5657583	6274831	277
6797356	6193153	35	5690955	6246982	80	6314898	6249574	87	5846833	6274422	176	5657590	6274832	277
6797417	6193188	36	6651733	6246990	81	6314959	6249582	89	5846727	6274440	176	5657644	6274840	278
6497355	6193196	37				6315017	6249590	91	5846765	6274441	176	5657880	6274870	278
6712939	6193218	38	6311897	6247016	83	6977123	6249612	85	5846772	6274442	176	5657958	6274880	278
6797479	6193226	39	6977369	6247091	85	6315079	6249639	87	5656692	6274490	172			/m
6797530	6193234	41	6312139	6247113	87	6315130	6249647	89	5656708	6274491	172	5658122	6274900	172
6974788	6193242	43	6312191	6247148	89	6315192	6249655	91	5656715	6274492	172			/pc.
6712991	6193285	44	6312252	6247164	91	6503537	6249671	85	5656722	6274496	172	5658139	6274910	277
6492794	6193293	46	5691006	6247194	93	6318254	6249701	87			/m	5658207	6274920	277
6713059	6193307	49			/pc.	6318315	6249728	89	5656739	6274500	174	5658306	6274930	278
6713110	6193315	50	6652754	6247431	78	6318377	6249736	91	5656746	6274501	174	5658375	6274940	278
6492855	6193323	51	6118991	6247434	79	6503292	6249795	86	5656753	6274502	174			/m
6713172	6193331	52	6315253	6247458	81	6575770	6249817	88	5656760	6274506	174			/pc.
6797592	6193358	53	6315314	6247466	85	6575831	6249825	90			/m	5897071	6276900	251
6492916	6193366	47	5699019	6247472	93	6575893	6249833	92	5656791	6274510	175	5897064	6276903	251
5042518	6193387	54	6652518	6247490	81	6018598	6249842	78	5656807	6274511	175			/pc.
5042587	6193391	55	6312313	6247504	83	6018710	6249844	79	5656814	6274512	175	5897095	6276910	252
5042655	6193395	56	6652273	6247563	81	5691020	6249845	80	5656821	6274516	175	5897088	6276913	252
5042723	6193399	57	6312733	6247571	83	6018833	6249846	82	5656838	6274520	176	5897118	6276920	253
6223695	6193501	25	6652150	6247652	81	6018956	6249848	84	5656845	6274521	176	5897101	6276923	253
6975266	6193528	27	6313150	6247660	83	6019076	6249850	86	5656852	6274522	176	5897156	6276940	253
6507313	6193560	34	6652396	6247725	81	5020325	6249852	88	5656869	6274526	176	5897125	6276943	253
5461814	6193580	40	6317592	6247733	83	5020387	6249854	90	5656876	6274540	176	5897170	6276960	253
5462170	6193582	40	6652631	6247881	82	5020394	6249856	92	5656883	6274541	176	5897163	6276963	253
5461821	6193586	42	6575114	6247903	84	5691037	6249865	94	5656890	6274542	176	5897224	6276970	254
5462187	6193588	42	6503476	6247989	85			/m	5656906	6274546	176	5897187	6276973	254
5461838	6193590	45				6644896	6249876	95	5656913	6274560	176			/m
5462217	6193592	45	6312559	6248004	88	5762898	6249880	95	5656920	6274561	176			/pc.
5461845	6193596	48	6312610	6248012	89			/pc.	5656937	6274562	176	5658726	6277000	192
5462224	6193598	48	6312672	6248020	91	5685081	6249881	87	5656944	6274566	176			/pc.
			6977062	6248047	85			/100 pc.	5656951	6274570	177	5658856	6277010	194
6448272	6194036	58	6312979	6248063	87	6119233	6249884	95	5656968	6274571	177	5658962	6277020	195
6448098	6194044	59	6313037	6248071	89	6119295	6249888	96	5656975	6274572	177	5659044	6277040	196
6447978	6194052	59	6313099	6248098	91			/pc.	5842712	6274574	254	5659150	6277060	196
6447497	6194060	60	6977185	6248128	85	6315376	6249906	95	5656982	6274576	177	5659228	6277070	196
6628636	6194109	59	6313396	6248144	87	6315499	6249922	95	5846901	6274610	179			/m
6628575	6194117	59	6313457	6248152	89	6315611	6249965	95	5846918	6274611	179	5659334	6277090	197
6628513	6194125	60	6313518	6248160	91	6315673	6249981	95	5846925	6274612	179	5659341	6277095	197
6628452	6194133	60	6503599	6248187	85			/m	5847052	6274620	179	5659389	6277100	192
6628391	6194141	60	6317837	6248209	87	5847144	6273910	231	5847069	6274621	179			/pc.
6628339	6194184	59	6317899	6248217	89	5847298	6273920	232	5847076	6274622	179	5659518	6277110	194
6618910	6194192	59	6317950	6248225	91	5847205	6273940	233	5846963	6274640	180	5659624	6277120	195
6618859	6194206	60	6503353	6248284	86			/m	5847007	6274641	180	5659709	6277140	196
6349814	6194214	60	6575596	6248306	88	5846390	6274210	171	5847014	6274642	180	5659815	6277160	196
			6575657	6248314	90	5846406	6274211	171			/VPE	5659921	6277170	197
		/m	6575718	6248322	92	5846413	6274212	171	5657033	6274650	170			/m
6096329	6199103	100	5699026	6248328	93	5846574	6274220	171			/m	5660002	6277200	198
6096442	6199109	100	5699033	6248332	93	5846581	6274221	171	5657040	6274700	178			/pc.
		/pc.	5699040	6248336	93	5846598	6274222	171	5657057	6274701	178	5660163	6277210	200
6096503	6199122	100	5699057	6248340	93	5846475	6274240	172	5657064	6274702	178	5660248	6277220	201
6100057	6199128	100	5699064	6248344	94	5846482	6274241	172	5657071	6274706	178	5660323	6277240	202
6119615	6199133	100	5699095	6248428	93	5846512	6274282	172			/pc.	5660408	6277260	202
6153312	6199139	100	5699101	6248432	93			/m	5657101	6274710	179	5660484	6277270	202
6153497	6199150	100	5699118	6248436	93	5655473	6274300	170	5657118	6274711	179			/VPE
6153558	6199156	100	5699125	6248450	93	5656333	6274301	170	5657125	6274712	179	5660590	6277290	192
6153619	6199163	100	5699156	6248454	94	5656340	6274302	170	5657132	6274716	179	5700852	6277294	192
6153794	6199169	100			/m	5656371	6274306	170	5657149	6274720	179			/m
6153855	6199180	100	6651795	6248462	78			/pc.	5657156	6274721	179	5660606	6277300	198
6154036	6199186	100	6119059	6248470	79	5656401	6274310	171	5657163	6274722	179			/pc.
		/m	5690962	6248482	80	5656432	6274311	171	5657170	6274726	179	5660767	6277310	200
6154098	6199202	102	6651856	6248497	81	5656449	6274312	171	5657187	6274740	180	5660811	6277320	201
6154272	6199208	102	6313570	6248519	83	5656456	6274316	171	5657194	6274741	180	5660866	6277340	202
		/pc.	6977307	6248608	85	5655664	6274320	171	5657200	6274742	180	5660941	6277360	202
6154333	6199223	102	6313815	6248624	87	5656463	6274321	171	5657217	6274746	180	5661023	6277370	203
6154517	6199229	102	6313877	6248640	89	5656494	6274322	171	5657224	6274760	180			/m
6154579	6199232	102	6313938	6248667	91	5656500	6274326	171	5657231	6274761	180	5661139	6277400	204
6155774	6199238	102	5691013	6248694	93	5656517	6274340	172	5657248	6274762	180			/pc.
6155835	6199251	102			/pc.	5656524	6274341	172	5657255	6274766	180	5661269	6277410	206
6156016	6199257	102	6652570	6248993	81	5656555	6274342	172	5657262	6274770	180	5661375	6277420	207
6156078	6199262	102			/m	5656562	6274346	172	5657279	6274771	180	5661443	6277430	207
6156375	6199268	102	6313990	6249000	83	5656579	6274360	172	5657286	6274772	180	5661559	6277440	208
6156559	6199281	102	6652334	6249086	81	5656586	6274361	172	5842729	6274774	258	5661665	6277460	208
6156672	6199287	102	6314232	6249094	83	5656616	6274362	172						

GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page	GTIN	Art. no.	Page
5662020	6277530	207	5666301	6278540	239	5768241	6279260	250	5695813	6279850	193	5148678	6288610	170
5662075	6277540	208	5666356	6278560	239	5768289	6279263	250		/pc.		5148685	6288611	170
5662129	6277560	208		/m		5768302	6279270	250	5695936	6279860	195	5148715	6288612	335
5662174	6277600	210	5666400	6278680	170	5768340	6279273	250	5696056	6279870	194	6555543	6288635	335
	/m		5666417	6278681	170		/m			/m		5148777	6288640	173
5662242	6277610	212	5666424	6278682	170	5768364	6279300	251	5680925	6279880	224	5148791	6288650	281
5662310	6277620	213	5666486	6278686	170	5768401	6279303	251		/pc.			/m	
5662365	6277640	214	6036233	6278690	274		/pc.		5681038	6279890	225	5685760	6288651	281
5662419	6277660	214	5666530	6278780	171	5768456	6279310	252	5681090	6279990	227		/pc.	
5662464	6277670	214	5666547	6278781	171	5768463	6279313	252		/m		5149071	6288680	241
	/m		5666554	6278782	171	5768487	6279320	252		/pc.		5149088	6288700	193
5662518	6277700	210	6036271	6278790	274	5768524	6279323	252	5137337	6282700	241	5149101	6288704	160
	/pc.			/pc.		5768548	6279340	253		/pc.		5149460	6288790	170
5662587	6277710	212	5666585	6278800	278	5768579	6279343	253	5137405	6282710	242	5160663	6288930	286
5662631	6277720	213	5666592	6278801	278	5768593	6279360	253	5137467	6282720	242	5160670	6288933	286
5662709	6277740	214	5666608	6278802	278	5768609	6279363	253	5137528	6282730	243	5160731	6288940	292
5662754	6277760	214	5666660	6278810	279	5768654	6279370	254	5137580	6282740	243	5160748	6288943	292
5662877	6277770	215	5666705	6278811	279	5768661	6279373	254	5137672	6282770	244	5160861	6288960	294
	/m		5666714	6278812	279		/m		5137740	6282870	243	5160908	6288963	294
5662945	6277800	216	5666776	6278820	279	5768715	6279400	259		/pc.			/pc.	
	/pc.		5666783	6278821	279	5768722	6279403	259	5809135	6286530	284	5477013	6289040	302
5663034	6277810	218	5666820	6278822	279		/pc.		5809142	6286540	285	5477402	6289043	302
5663102	6277820	219	5666875	6278830	279	5768784	6279410	260	5143888	6286700	318	5477419	6289050	306
5663140	6277830	219	5666882	6278831	279	5768821	6279413	260	5143918	6286702	318	5477020	6289053	306
5663195	6277840	220	5666899	6278832	279	5768845	6279420	260	5144045	6286800	285	5477037	6289060	300
5663249	6277860	220	5666929	6278840	280	5768876	6279423	260	5144052	6286802	285	5477426	6289063	300
	/m		5666936	6278841	280	5817925	6279430	260	5144090	6286810	318	5477433	6289070	304
5663317	6277900	216	5666943	6278842	280	5817956	6279433	260		/m		5477044	6289073	304
	/pc.		5666974	6278850	280	5768890	6279440	261	5144700	6287050	242	6258697	6289088	290
5663409	6277910	218	5666981	6278851	280	5768906	6279443	261	5144762	6287060	243	6258703	6289090	290
5663478	6277920	219	5666998	6278852	280	5768951	6279460	261	5144823	6287070	243	6258758	6289096	319
5663539	6277930	219	5667025	6278860	281	5768968	6279463	261	5144885	6287080	243	6258765	6289098	319
5663607	6277940	220	5667056	6278861	281	5769002	6279470	258		/m		5773863	6289970	308
5663690	6277960	221	5667063	6278862	281	5818885	6279473	258	5146575	6287700	276	5773870	6289972	308
	/m		5667094	6278870	281		/m		5146582	6287701	276	5773887	6289974	310
5663744	6278000	229	5667100	6278871	281	5769491	6279600	263	5146612	6287702	276	5773924	6289976	310
	/pc.		5667117	6278872	281	5769507	6279603	263	5146643	6287710	276	5811787	6289980	321
5663812	6278010	231	5667148	6278880	279		/pc.		5146674	6287711	276	5811794	6289982	321
5663867	6278020	232	5667179	6278881	279	5769569	6279610	264	5146681	6287712	276		/pc.	
5663904	6278030	232	5667186	6278882	279	5769606	6279613	264	5146704	6287723	276	5161202	6290010	288
5663959	6278050	233	5667216	6278890	279	5769620	6279620	264	5146742	6287733	276	5161219	6290013	288
5664000	6278060	233	5667223	6278891	279	5769668	6279623	264		/pc.		5161226	6290020	319
5664055	6278070	234	5667230	6278892	279	5769682	6279640	264	5146797	6287810	277	5161264	6290023	319
	/m			/m		5769729	6279643	264		/m		5161288	6290030	319
5664109	6278100	229	5667261	6279000	279	5769743	6279660	265	5676140	6288001	274	5161325	6290033	319
	/pc.		5667278	6279001	279	5769774	6279663	265	5676188	6288003	274	5161349	6290040	319
5664178	6278110	231	5667285	6279002	279	5769804	6279670	265	5676195	6288005	274	5161387	6290043	319
5664222	6278120	232	5667315	6279010	280	5769798	6279673	265	5676201	6288007	274	5161561	6290073	320
5664260	6278130	232	5667149	6278881	279		/VPE		5146865	6288030	276	5428091	6290086	296
5664376	6278140	233	5667322	6279011	280	5769989	6279701	248	5146872	6288032	276	5428107	6290087	296
5664482	6278160	233	5667353	6279012	280	5770022	6279704	251	5146889	6288034	276	5428138	6290090	320
5664567	6278170	234	5667421	6279022	280		/m		5146971	6288044	276	5428145	6290091	320
	/m		5667476	6279030	280	5770039	6279711	250	5147008	6288050	276	5459095	6290095	298
5664666	6278200	223	5667532	6279040	281	5770046	6279714	254	5147039	6288052	276	5459101	6290097	298
	/pc.		5667537	6279041	281	5770084	6279720	248	5147060	6288058	276	5161578	6290100	292
5664789	6278210	225	5667549	6279042	281	5770091	6279723	248	5147121	6288066	276	5161585	6290104	292
5664831	6278220	226	5667594	6279050	281		/pc.		5297253	6288084	276	5161691	6290120	286
5664901	6278230	226	5667759	6279051	281	5776147	6279725	249	5297284	6288090	276	5161707	6290124	286
5664987	6278240	227	5667821	6279052	281	5776154	6279727	249	5147152	6288100	275	5161752	6290130	294
5665083	6278260	227	5667842	6279053	280	5776161	6279734	249	5147169	6288102	275	5161769	6290134	294
	/m		5667843	6279031	280	5776192	6279736	249	5147176	6288104	275	5161813	6290150	287
5665137	6278300	223	5667848	6279032	280	5667667	6279760	194	5147183	6288106	275	5161868	6290160	286
	/pc.		5667849	6279033	280	5667704	6279764	200	5147213	6288108	275	5161882	6290170	292
5665205	6278310	225	5667520	6279040	281	5667742	6279768	212	5147220	6288110	275	5161936	6290174	287
5665250	6278320	226	5667537	6279041	281	5667780	6279772	230	5147237	6288112	275	5161943		

GTIN	Art. no.	Page
5817048	6290362 /pc.	305
5817055	6290372	308
5817062	6290382	307
5817079	6290387	308
6191468	6290404	312
6191451	6290406	313
6191499	6290416	313
6191505	6290422	314
6191512	6290423	314
6191529	6290436	313
6427451	6290456	315
6258659	6290495	314
6191550	6290499	314



Type	GTIN	Art. no.	Page	Type	GTIN	Art. no.	Page
2064 GTP 2M	5044291	price/100 1115057	131	71GD7	5148685	6288611	316
2064 GTP 2M	5044291	1115057	140	71GD7	5148685	6288611	322
2064 GTP 2M	5044352	1115065	131	71GD7	5148685	6288611	334
2064 GTP 2M	5044352	1115065	140	71GD8-2	5914990	6288569	316
2069 2M GTP	5045434	1115650	131	71GD8-2	5914990	6288569	322
2069 2M GTP	5045434	1115650	140	71GD8-2	5914990	6288569	331
2069 2M GTP	5045496	1115669	132	71GD9-2	5915003	6288579	316
2069 2M GTP	5045496	1115669	140	71GD9-2	5915003	6288579	322
		/m		71GD9-2	5915003	6288579	333
2371 100	6030736	6026990	58	71GD9-2	6429844	6288585	174
2371 40	6024315	6023096	58	71GD9-2	6429851	6288586	174
2371 40	6024315	6023096	155	71GD9-2	6555543	6288635	335
2371 40	6024315	6023096	270	71GD9-2	6609963	6119483	327
2371 40	6024315	6023096	297	71GD9-2	6609994	6119485	328
2371 40	6024315	6023096	299	71MT1 45	5983330	6288572	331
2371 40	6024315	6023096	309	71MT2 45	5889106	6288576	332
2371 40	6024315	6023096	311	71MT3 45-2	5915027	6288574	333
2371 60	6024377	6023118	58	71MTD	5809128	6288577	334
2371 80	6030675	6026982	58	71VD80	6615070	6279817	335
		/pc.		7LSB	5148791	6288650	281
2390	6024919	6023207	58	7LSB M	5685760	6288651	281
2392	6027132	6024009	61			/m	
2393 16	6027255	6024025	61	7ZE	5149460	6288790	170
2393 32	6027316	6024033	61	7ZE	5149460	6288790	175
		/m		7ZE	5149460	6288790	178
2410 110GR	6023295	6022715	62	7ZE	5149460	6288790	184
2410 110LGR	6669257	6028152	62	7ZE	5149460	6288790	187
2410 170GR	6023417	6022758	62	7ZE	5149460	6288790	193
2410 170LGR	6773893	6028187	62	7ZE	5149460	6288790	199
2650	6362530	6020801	104	7ZE	5149460	6288790	205
		/pc.		7ZE	5149460	6288790	211
71GD11	5809111	6288532	334	7ZE	5149460	6288790	217
71GD13	5889083	6288583	316	7ZE	5149460	6288790	224
71GD13	5889083	6288583	322	7ZE	5149460	6288790	230
71GD13	5889083	6288583	332	7ZE	5149460	6288790	236
71GD6	5148678	6288610	170	7ZE	5149460	6288790	241
71GD6	5148678	6288610	174	7ZE	5149460	6288790	248
71GD6	5148678	6288610	178	7ZE	5149460	6288790	252
71GD6	5148678	6288610	184	7ZE	5149460	6288790	256
71GD6	5148678	6288610	187	7ZE	5149460	6288790	259
71GD6	5148678	6288610	192	7ZE	5149460	6288790	263
71GD6	5148678	6288610	198	7ZE	5149460	6288790	334
71GD6	5148678	6288610	204	8AWR	5149101	6288704	160
71GD6	5148678	6288610	210	8AWR	5149101	6288704	163
71GD6	5148678	6288610	216	8AWR	5149101	6288704	166
71GD6	5148678	6288610	223	8AWR	5149101	6288704	197
71GD6	5148678	6288610	229	8AWR	5149101	6288704	203
71GD6	5148678	6288610	235	8AWR	5149101	6288704	209
71GD6	5148678	6288610	241	8AWR	5149101	6288704	215
71GD6	5148678	6288610	248	8AWR	5149101	6288704	222
71GD6	5148678	6288610	251	8AWR	5149101	6288704	228
71GD6	5148678	6288610	256	8AWR	5149101	6288704	234
71GD6	5148678	6288610	259	8AWR	5149101	6288704	240
71GD6	5148678	6288610	263	8AWR	5149101	6288704	244
71GD6	5148678	6288610	316	8AWR	5149101	6288704	250
71GD6	5148678	6288610	322	8AWR	5149101	6288704	255
71GD6	5148678	6288610	334	8AWR	5149101	6288704	258
71GD7	5148685	6288611	170	8AWR	5149101	6288704	262
71GD7	5148685	6288611	174	8AWR	5149101	6288704	265
71GD7	5148685	6288611	178	8AWR	5149101	6288704	269
71GD7	5148685	6288611	184	8AWR	5149101	6288704	314
71GD7	5148685	6288611	187	8AWR	5149101	6288704	317
71GD7	5148685	6288611	193	8AWR	5149101	6288704	322
71GD7	5148685	6288611	199	8VS4	5146797	6287810	277
71GD7	5148685	6288611	205			/100 pc.	
71GD7	5148685	6288611	211	910 SD 6X35	5669197	2351056	61
71GD7	5148685	6288611	217			/pc.	
71GD7	5148685	6288611	224	AD-90G M45-1	6594702	6120992	343
71GD7	5148685	6288611	229				
71GD7	5148685	6288611	235	ADP-B AL0.5	6215652	6117416	364
71GD7	5148685	6288611	241	ADP-B AL1	6214037	6117408	364
71GD7	5148685	6288611	248	ADP-B RW0.5	6117550	6117414	364
71GD7	5148685	6288611	251	ADP-B RW1	6117499	6117406	364
71GD7	5148685	6288611	256	ADP-B SWGR0.5	5701286	6117415	364
71GD7	5148685	6288611	259				
71GD7	5148685	6288611	263				

Type	GTIN	Art. no.	Page
ADP-B SWGR1	5701279	6117407	364
ADP-BF AL0.5	6164851	6117412	364
ADP-BF RW0.5	6164813	6117410	364
ADP-BF SWGR0.5	6164820	6117411	364
AH1	6014873	6178540	131
AH2	6014996	6178542	131
AKZ	6014750	6178535	131
AKZ	6014750	6178535	139
ANT-3SD AL1	6164790	6105286	360
ANT-3SD RW1	6164752	6105282	360
ANT-3SD SWGR1	6164769	6105284	360
AOP3S80RW	5144700	6287050	242
AR45-BF1 AL	5888833	6119336	331
AR45-BF1 RW	5888819	6119332	331
AR45-BF1 SWGR	5888826	6119334	331
AR45-BF2 AL	5888932	6119356	332
AR45-BF2 RW	5888895	6119352	332
AR45-BF2 SWGR	5888901	6119354	332
AR45-BF3 AL	5889045	6119386	333
AR45-BF3 RW	5889021	6119382	333
AR45-BF3 SWGR	5889038	6119384	333
AR45-BSF1 AL	5896814	6119340	331
AR45-BSF1 RW	5896791	6119338	331
AR45-BSF1 SWGR	5896807	6119339	331
AR45-BSF2 AL	5888963	6119366	332
AR45-BSF2 RW	5888949	6119362	332
AR45-BSF2 SWGR	5888956	6119364	332
AR45-BSF3 AL	5983323	6119389	333
AR45-BSF3 RW	5983309	6119387	333
AR45-BSF3 SWGR	5983316	6119388	333
AR45-F1 AL	5888802	6119326	331
AR45-F1 RW	5888789	6119322	331
AR45-F1 SWGR	5888796	6119324	331
AR45-F2 AL	5888888	6119346	332
AR45-F2 RW	5888840	6119342	332
AR45-F2 SWGR	5888871	6119344	332
AR45-F3 AL	5889014	6119376	333
AR45-F3 RW	5888994	6119372	333
AR45-F3 SWGR	5889007	6119374	333
AR50-F1 AL	5889076	6119396	336
AR50-F1 RW	5889052	6119392	336
AR50-F1 SWGR	5889069	6119394	336
ASM-C5	6235278	6117337	345
ASM-C5 G	6235155	6117325	345
ASM-C6	6235339	6117341	345
ASM-C6 G	6235216	6117329	345
ASM-C6A	5887522	6117348	346
ASM-C6A G	5887515	6117346	346
BKN120 205	5676195	6288005	274
BKN200 350	5676201	6288007	274
BKN50 80	5676140	6288001	274
BKN75 125	5676188	6288003	274
BTA-SKS S1 SW	5438069	6117190	376
BTA-SKS S1 W	5483540	6117191	376
BT-F GST18i3p SW	5273585	6108052	377
BT-F GST18i3p W	5273592	6108053	377
BT-S GST18i3p SW	5273653	6108056	377
BT-S GST18i3p W	5273660	6108057	377
BT-S GST18i5p SW	5273714	6108072	379
BT-S4 GST18i3 SW	6584703	6108064	378
BT-S4 GST18i3 W	6584734	6108066	378
BVL	5147404	6288180	276
CEE16E2	5148715	6288612	335
CEE16E2	5148715	6288612	335

Type	GTIN	Art. no.	Page
CP45-KL	5577980	6108043	387
CP45-LG 8A	5577942	6108037	386
CP45-TP 3SI	6584758	6108024	386
CP45-TP 4SI	6584765	6108026	386
CP45-TP 8C	6584796	6108028	386
CP45-TP M	5577959	6108039	386
CST-STD	6333561	6120799	371
CST-STD	6333561	6120799	373
CST-STD K	6602889	6120797	369
D2-1 110CW	6111619	6169309	58
D2-1 110RW	6448272	6194036	58
D2-1 130CW	6111671	6169317	59
D2-1 130RW	6448098	6194044	59
D2-1 150RW	6447978	6194052	59
D2-1 170CW	6111732	6169325	60
D2-1 170RW	6447497	6194060	60
D2-2 110CW	6111855	6169376	59
D2-2 110GR	6103997	6159370	59
D2-2 110RW	6628636	6194109	59
D2-2 130CW	6111916	6169384	59
D2-2 130RW	6628575	6194117	59
D2-2 150CW	6782291	6169368	60
D2-2 150RW	6628513	6194125	60
D2-2 170RW	6628452	6194133	60
D2-2 210RW	6628391	6194141	60
D2-3 110CW	6112098	6169430	59
D2-3 110RW	6628339	6194184	59
D2-3 130CW	6112159	6169449	59
D2-3 130RW	6618910	6194192	59
D2-3 150CW	6782475	6169422	60
D2-3 150RW	6618859	6194206	60
D2-3 170RW	6349814	6194214	60
DAB-2F	5817062	6290382	307
DAB-2F	5817062	6290382	311
DAB-F RW	5448792	6290269	299
DAB-F RW	5448792	6290269	303
DTE-RW G2A1	6439041	6119494	330
DTE-RW G2C1	6410439	6119492	330
DTE-RW G2RM1	6410415	6119490	330
DTG-02C AL1	5887379	6119284	349
DTG-02C RW1	5887331	6119280	349
DTG-02C SWGR1	5887348	6119282	349
DTG-02LE AL1	5925538	6119308	351
DTG-02LE RW1	5925491	6119304	351
DTG-02LE SWGR1	5925507	6119306	351
DTG-2A AL1	5696940	6119206	348
DTG-2A RW1	5696896	6119202	348
DTG-2A SWGR1	5696902	6119204	348
DTG-2B AL1	5696971	6119212	348
DTG-2B RW1	5696957	6119208	348
DTG-2B SWGR1	5696964	6119210	348
DTG-2C AL1	5697008	6119218	344
DTG-2C AL1	5697008	6119218	349
DTG-2C RW1	5696988	6119214	344
DTG-2C RW1	5696988	6119214	349
DTG-2C SWGR1	5696995	6119216	344
DTG-2C SWGR1	5696995	6119216	349
DTG-2EP AL1	5697121	6119236	350
DTG-2EP RW1	5697077	6119232	350
DTG-2EP SWGR1	5697084	6119234	350
DTG-2F AL1	5697039	6119224	350
DTG-2F RW1	5697015	6119220	350
DTG-2F SWGR1	5697022	6119222	350
DTG-2PA AL1	5697060	6119230	351
DTG-2PA RW1	5697046	6119226	351
DTG-2PA SWGR1	5697053	6119228	351
DTG-2RM AL1	5887454	6119296	344
DTG-2RM AL1	5887454	6119296	351
DTG-2RM RW1	5887430	6119292	344
DTG-2RM RW1	5887430	6119292	351
DTG-2RM SWGR1	5887447	6119294	344
DTG-2RM SWGR1	5887447	6119294	351
DTS-02C AL1	5887409	6119290	350
DTS-02C RW1	5887386	6119286	350
DTS-02C SWGR1	5887393	6119288	350
DTS-2A AL1	5697183	6119242	348



Type	GTIN	Art. no.	Page
/m			
GA-S70130RW	5768364	6279300	251
GA-S70170EL	5842545	6279103	256
GA-S70170RW	5842552	6279100	256
GA-S90130EL	5897064	6276903	251
GA-S90130RW	5897071	6276900	251
/pc.			
GA-SA70110EL	5768128	6279213	249
GA-SA70110RW	5768111	6279210	249
GA-SA70130EL	5768463	6279313	252
GA-SA70130RW	5768456	6279310	252
GA-SA70170EL	5842583	6279113	257
GA-SA70170RW	5842590	6279110	257
GA-SA90130EL	5897088	6276913	252
GA-SA90130RW	5897095	6276910	252
GA-SF70110EL	5768173	6279223	249
GA-SF70110RW	5768166	6279220	249
GA-SF70130EL	5768524	6279323	252
GA-SF70130RW	5768487	6279320	252
GA-SF70170EL	5842613	6279123	257
GA-SF70170RW	5842620	6279121	257
GA-SF90130EL	5897101	6276923	253
GA-SF90130RW	5897118	6276920	253
GA-SI70110EL	5768227	6279243	249
GA-SI70110RW	5768210	6279240	249
GA-SI70130EL	5768579	6279343	253
GA-SI70130RW	5768548	6279340	253
GA-SI70170EL	5842644	6279143	257
GA-SI70170RW	5842651	6279140	257
GA-SI90130EL	5897125	6276943	253
GA-SI90130RW	5897156	6276940	253
GA-ST70110EL	5768289	6279263	250
GA-ST70110RW	5768241	6279260	250
GA-ST70130EL	5768609	6279363	253
GA-ST70130RW	5768593	6279360	253
GA-ST70170EL	5842675	6279163	258
GA-ST70170RW	5842682	6279160	258
GA-ST90130EL	5897163	6276963	253
GA-ST90130RW	5897170	6276960	253
/m			
GA-TW70	5770039	6279711	250
GA-TW70	5770039	6279711	254
GA-TW70	5770039	6279711	258
GA-TW70	5770039	6279711	261
GA-TW70	5770039	6279711	265
GA-TW70	5770039	6279711	293
GA-TW70	5770039	6279711	295
GA-TW90	5770046	6279714	254
GA-TW90	5770046	6279714	265
/pc.			
G-AWAG70110CW	5666936	6278841	280
G-AWAG70110LGR	5666943	6278842	280
G-AWAG70110RW	5666929	6278840	280
G-AWAG70110RW	5666929	6278840	293
G-AWAG70130CW	5666981	6278851	280
G-AWAG70130LGR	5666998	6278852	280
G-AWAG70130RW	5666974	6278850	280
G-AWAG70170CW	5667056	6278861	281
G-AWAG70170LGR	5667063	6278862	281
G-AWAG70170RW	5667025	6278860	281
G-AWAG70210CW	5667100	6278871	281
G-AWAG70210LGR	5667117	6278872	281
G-AWAG70210RW	5667094	6278870	281
G-AWAG90110CW	5667414	6279021	280
G-AWAG90110LGR	5667421	6279022	280
G-AWAG90110RW	5667384	6279020	280
G-AWAG90130CW	5667483	6279031	280
G-AWAG90130LGR	5667490	6279032	280
G-AWAG90130RW	5667476	6279030	280
G-AWAG90170CW	5667537	6279041	281
G-AWAG90170LGR	5667544	6279042	281
G-AWAG90170RW	5667520	6279040	281
G-AWAG90210CW	5667605	6279051	281
G-AWAG90210LGR	5667612	6279052	281
G-AWAG90210RW	5667599	6279050	281
G-AWAO70110CW	5666592	6278801	278
G-AWAO70110LGR	5666608	6278802	278
G-AWAO70110RW	5666585	6278800	278
G-AWAO70130CW	5666707	6278811	279
G-AWAO70130LGR	5666714	6278812	279
G-AWAO70130RW	5666660	6278810	279
G-AWAO70170CW	5666783	6278821	279
G-AWAO70170LGR	5666820	6278822	279

Type	GTIN	Art. no.	Page
/pc.			
G-AWAO70170RW	5666776	6278820	279
G-AWAO70210CW	5666882	6278831	279
G-AWAO70210LGR	5666899	6278832	279
G-AWAO70210RW	5666875	6278830	279
G-AWAO90110CW	5667179	6278881	279
G-AWAO90110LGR	5667186	6278882	279
G-AWAO90110RW	5667148	6278880	279
G-AWAO90130CW	5667223	6278891	279
G-AWAO90130LGR	5667230	6278892	279
G-AWAO90130RW	5667216	6278890	279
G-AWAO90170CW	5667278	6279001	279
G-AWAO90170LGR	5667285	6279002	279
G-AWAO90170RW	5667261	6279000	279
G-AWAO90210CW	5667322	6279011	280
G-AWAO90210LGR	5667353	6279012	280
G-AWAO90210RW	5667315	6279010	280
/m			
GEK-K53160-3	5391630	6116073	153
/pc.			
GEK-KA53160-3	5428695	6116261	154
GEK-KAS53160-3	5391678	6116263	154
GEK-KE53160-3	5391685	6116403	154
GEK-KF53160-3	5391692	6116493	153
GEK-KI53160-3	5428688	6116201	153
GEK-KIS53160-3	5391661	6116203	153
/m			
GEK-KOT45	6708970	6116108	154
/pc.			
GEK-KS45-3	5391647	6116163	153
GEK-KSOT45	5481485	6116152	153
GEK-KT53160-3	5391654	6116193	154
/m			
GEK-SA133110RW	5137337	6282700	241
/pc.			
GEK-SAA133110RW	5137405	6282710	242
GEK-SAFF133110RW	5137528	6282730	243
GEK-SAFS133110RW	5137467	6282720	242
GEK-SAIS133110RW	5137580	6282740	243
GEK-SEL133110RW	5137740	6282870	243
GEK-SER133110RW	5137672	6282770	244
/m			
GK-53100LGR	6419074	6113002	144
GK-53100RW	6419036	6113000	144
GK-53130LGR	6419395	6113202	147
GK-53130RW	6419388	6113200	147
GK-53165LGR	6419920	6113402	150
GK-53165RW	6419913	6113400	150
/pc.			
GK-70110CW	5656333	6274301	170
GK-70110GR	5656371	6274306	170
GK-70110LGR	5656340	6274302	170
GK-70110RW	5655473	6274300	170
GK-70130CW	5656746	6274501	174
GK-70130GR	5656760	6274506	174
GK-70130LGR	5656753	6274502	174
GK-70130RW	5656739	6274500	174
GK-70170CW	5657057	6274701	178
GK-70170GR	5657071	6274706	178
GK-70170LGR	5657064	6274702	178
GK-70170RW	5657040	6274700	178
/pc.			
GK-A70110CW	5656432	6274311	171
GK-A70110GR	5656456	6274316	171
GK-A70110LGR	5656449	6274312	171
GK-A70110RW	5656401	6274310	171
GK-A70130CW	5656807	6274511	175
GK-A70130GR	5656821	6274516	175
GK-A70130LGR	5656814	6274512	175
GK-A70130RW	5656791	6274510	175
GK-A70170CW	5657118	6274711	179
GK-A70170GR	5657132	6274716	179
GK-A70170LGR	5657125	6274712	179
GK-A70170RW	5657101	6274710	179
GK-AH53100AL	6417988	6113054	159
GK-AH53100LGR	6419210	6113052	145
GK-AH53100RW	6419203	6113050	145
GK-AH53100RW	6419203	6113050	159
GK-AH53130AL	6418305	6113234	162
GK-AH53130LGR	6419500	6113232	148
GK-AH53130RW	6419470	6113230	148
GK-AH53130RW	6419470	6113230	162

Type	GTIN	Art. no.	Page
GK-AH53165AL	6418565	6113424	165
GK-AH53165LGR	6419982	6113422	151
GK-AH53165RW	6419975	6113420	151
GK-AH53165RW	6419975	6113420	165
GK-AH70110CW	5846406	6274211	171
GK-AH70110LGR	5846413	6274212	171
GK-AH70110RW	5846390	6274210	171
GK-AH70110RW	5846390	6274210	194
GK-AH70130CW	5846673	6274411	175
GK-AH70130LGR	5846680	6274412	175
GK-AH70130RW	5846666	6274410	175
GK-AH70130RW	5846666	6274410	185
GK-AH70130RW	5846666	6274410	200
GK-AH70130RW	5846666	6274410	206
GK-AH70170CW	5846918	6274611	179
GK-AH70170LGR	5846925	6274612	179
GK-AH70170RW	5846901	6274610	179
GK-AH70170RW	5846901	6274610	188
GK-AH70170RW	5846901	6274610	212
GK-AH70170RW	5846901	6274610	218
GK-AH70170RW	5846901	6274610	225
GK-AH70210RW	5847144	6273910	231
GK-AH70210RW	5847144	6273910	237
GK-AS53100LGR	6419197	6113042	145
GK-AS53100RW	6419173	6113040	145
GK-AS53130LGR	6419463	6113222	148
GK-AS53130RW	6419456	6113220	148
GK-AS53165LGR	6419944	6113412	151
GK-AS53165RW	6419937	6113410	151
GK-E53100AL	6418206	6113114	159
GK-E53100LGR	6419371	6113112	145
GK-E53100RW	6419357	6113110	145
GK-E53100RW	6419357	6113110	159
GK-E53130AL	6418381	6113284	162
GK-E53130LGR	6419661	6113282	148
GK-E53130RW	6419647	6113280	148
GK-E53130RW	6419647	6113280	162
GK-E53165AL	6418657	6113474	165
GK-E53165LGR	6420124	6113472	151
GK-E53165RW	6420117	6113470	151
GK-E53165RW	6420117	6113470	165
GK-E70110CW	5656647	6274371	172
GK-E70110GR	5656685	6274376	172
GK-E70110LGR	5656678	6274372	172
GK-E70110RW	5656630	6274370	172
GK-E70110RW	5656630	6274370	250
GK-E70110WA	5842705	6274374	250
GK-E70130CW	5656968	6274571	177
GK-E70130GR	5656982	6274576	177
GK-E70130LGR	5656975	6274572	177
GK-E70130RW	5656951	6274570	177
GK-E70130RW	5656951	6274570	254
GK-E70130WA	5842712	6274574	254
GK-E70170CW	5657279	6274771	180
GK-E70170GR	5657293	6274776	180
GK-E70170LGR	5657286	6274772	180
GK-E70170RW	5657262	6274770	180
GK-E70170RW	5657262	6274770	258
GK-E70170RW	5657262	6274770	261
GK-E70170WA	5842729	6274774	258
GK-E70170WA	5842729	6274774	261
GK-F70110CW	5656463	6274321	171
GK-F70110GR	5656500	6274326	171
GK-F70110LGR	5656494	6274322	171
GK-F70110RW	5655664	6274320	171
GK-F70130CW	5656845	6274521	176
GK-F70130GR	5656869	6274526	176
GK-F70130LGR	5656852	6274522	176
GK-F70130RW	5656838	6274520	176
GK-F70170CW	5657156	6274721	179
GK-F70170GR	5657170	6274726	179
GK-F70170LGR	5657163	6274722	179
GK-F70170RW	5657149	6274720	179
GK-FH53100AL	6418046	6113094	158
GK-FH53100LGR	6419319	6113092	144
GK-FH53100RW	6419296	6113090	144
GK-FH53100RW	6419296	6113090	158
GK-FH53130AL	6418374	6113274	161
GK-FH53130LGR	6419630	6113272	147
GK-FH53130RW	6419616	6113270	147
GK-FH53130RW	6419616	6113270	161
GK-FH53165AL	6418633	6113464	164

Type	GTIN	Art. no.	Page
GK-FH53165LGR	6420100	6113462	150
GK-FH53165RW	6420094	6113460	150
GK-FH53165RW	6420094	6113460	164
GK-FH70110CW	5846581	6274221	171
GK-FH70110LGR	5846598	6274222	171
GK-FH70110RW	5846574	6274220	171
GK-FH70110RW	5846574	6274220	195
GK-FH70130CW	5846826	6274421	176
GK-FH70130LGR	5846833	6274422	176
GK-FH70130RW	5846819	6274420	176
GK-FH70130RW	5846819	6274420	185
GK-FH70130RW	5846819	6274420	201
GK-FH70130RW	5846819	6274420	207
GK-FH70170CW	5847069	6274621	179
GK-FH70170LGR	5847076	6274622	179
GK-FH70170RW	5847052	6274620	179
GK-FH70170RW	5847052	6274620	188
GK-FH70170RW	5847052	6274620	213
GK-FH70170RW	5847052	6274620	219
GK-FH70170RW	5847052	6274620	226
GK-FH70210RW	5847298	6273920	232
GK-FH70210RW	5847298	6273920	238
GK-FS53100LGR	6419289	6113082	144
GK-FS53100RW	6419272	6113080	144
GK-FS53130LGR	6419609	6113262	147
GK-FS53130RW	6419586	6113260	147
GK-FS53165LGR	6420063	6113452	150
GK-FS53165RW	6420056	6113450	150
GKH-70130RW	6450824	6114200	184
GKH-70170RW	6451180	6114300	187
GKH-A70130RW	6450848	6114220	185
GKH-A70170RW	6451197	6114320	188
GKH-E70130RW	6451166	6114280	186
GKH-E70170RW	6451364	6114380	189
GKH-F70130RW	6450909	6114240	185
GKH-F70170RW	6451241	6114340	188
GKH-I70130RW	6451012	6114260	186
GKH-I70170RW	6451296	6114360	189
GKH-OTGARW	6450893	6114230	185
GKH-OTGARW	6450893	6114230	188
GKH-OTGRW	6450930	6114250	185
GKH-OTGRW	6450930	6114250	188
GKH-OTGRW	6450831	6114210	184
GKH-OTGRW	6450831	6114210	187
GKH-T70130RW	6451111	6114270	186
GKH-T70170RW	6451319	6114370	189
GKH-TW70	6451173	6114290	186
GKH-TW70	6451173	6114290	189
GK-I70110CW	5656524	6274341	172
GK-I70110GR	5656562	6274346	172
GK-I70110LGR	5656555	6274342	172
GK-I70110RW	5656517	6274340	172
GK-I70130CW	5656883	6274541	176
GK-I70130GR	5656906	6274546	176
GK-I70130LGR	5656890	6274542	176
GK-I70130RW	5656876	6274540	176
GK-I70170CW	5657194	6274741	180
GK-I70170GR	5657217	6274746	180
GK-I70170LGR	5657200	6274742	180
GK-I70170RW	5657187	6274740	180
GK-IH53100AL	6418015	6113074	158
GK-IH53100LGR	6419265	6113072	144
GK-IH53100RW	6419258	6113070	144
GK-IH53100RW	6419258	6113070	158
GK-IH53130AL	6418312	6113254	161
GK-IH53130LGR	6419562	6113252	147
GK-IH53130RW	6419555	6113250	147
GK-IH53130RW	6419555	6113250	161
GK-IH53165AL	6418602	6113444	164
GK-IH53165LGR	6420049	6113442	150
GK-IH53165RW	6420032	6113440	150
GK-IH53165RW	6420032	6113440	164
GK-IH70110CW	5846482	6274241	172
GK-IH70110LGR	5846512	6274282	172
GK-IH70110RW	5846475	6274240	172
GK-IH70110RW	5846475	6274240	196

Type	GTIN	Art. no.	Page
		/pc.	
GK-IH70130CW	5846765	6274441	176
GK-IH70130LGR	5846772	6274442	176
GK-IH70130RW	5846727	6274440	176
GK-IH70130RW	5846727	6274440	186
GK-IH70130RW	5846727	6274440	202
GK-IH70130RW	5846727	6274440	208
GK-IH70170CW	5847007	6274641	180
GK-IH70170LGR	5847014	6274642	180
GK-IH70170RW	5846963	6274640	180
GK-IH70170RW	5846963	6274640	189
GK-IH70170RW	5846963	6274640	214
GK-IH70170RW	5846963	6274640	220
GK-IH70170RW	5846963	6274640	227
GK-IH70210RW	5847205	6273940	233
GK-IH70210RW	5847205	6273940	239
GK-IS53100LGR	6419234	6113062	144
GK-IS53100RW	6419227	6113060	144
GK-IS53130LGR	6419531	6113242	147
GK-IS53130RW	6419517	6113240	147
GK-IS53165LGR	6420001	6113432	150
GK-IS53165RW	6419999	6113430	150
GK-KS45-1AL	6417940	6113024	158
GK-KS45-1AL	6417940	6113024	164
GK-KS45-1LGR	6419142	6113022	144
GK-KS45-1LGR	6419142	6113022	150
GK-KS45-1RW	6419111	6113020	144
GK-KS45-1RW	6419111	6113020	150
GK-KS45-1RW	6419111	6113020	158
GK-KS45-1RW	6419111	6113020	161
GK-KS45-1RW	6419111	6113020	164
GK-KS45-2AL	6418268	6113214	161
GK-KS45-2LGR	6419432	6113212	147
GK-KS45-2RW	6419418	6113210	147
		/VPE	
GK-KUP	5657033	6274650	170
GK-KUP	5657033	6274650	174
GK-KUP	5657033	6274650	178
GK-KUP	5657033	6274650	184
GK-KUP	5657033	6274650	187
		/m	
GK-OT45LGR	6419104	6113012	145
GK-OT45LGR	6419104	6113012	148
GK-OT45LGR	6419104	6113012	151
GK-OT45RW	6419081	6113010	145
GK-OT45RW	6419081	6113010	148
GK-OT45RW	6419081	6113010	151
		/pc.	
GK-OTGACW	5657347	6274791	171
GK-OTGACW	5657347	6274791	175
GK-OTGACW	5657347	6274791	179
GK-OTGAGR	5657361	6274796	171
GK-OTGAGR	5657361	6274796	175
GK-OTGAGR	5657361	6274796	179
GK-OTGALGR	5657354	6274792	171
GK-OTGALGR	5657354	6274792	175
GK-OTGALGR	5657354	6274792	179
GK-OTGARW	5657309	6274790	171
GK-OTGARW	5657309	6274790	175
GK-OTGARW	5657309	6274790	179
GK-OTGARW	5657309	6274790	195
GK-OTGARW	5657309	6274790	201
GK-OTGARW	5657309	6274790	206
GK-OTGARW	5657309	6274790	213
GK-OTGARW	5657309	6274790	219
GK-OTGARW	5657309	6274790	231
GK-OTGARW	5657309	6274790	237
		/m	
GK-OTGCW	5666417	6278681	170
GK-OTGCW	5666417	6278681	175
GK-OTGCW	5666417	6278681	178
		/pc.	
GK-OTGFCW	5656708	6274491	172
GK-OTGFCW	5656708	6274491	176
GK-OTGFCW	5656708	6274491	180
GK-OTGFGR	5656722	6274496	172
GK-OTGFGR	5656722	6274496	176
GK-OTGFGR	5656722	6274496	180
GK-OTGFLGR	5656715	6274492	172
GK-OTGFLGR	5656715	6274492	176
GK-OTGFLGR	5656715	6274492	180
GK-OTGFRW	5656692	6274490	172
GK-OTGFRW	5656692	6274490	176

Type	GTIN	Art. no.	Page
		/pc.	
GK-OTGFRW	5656692	6274490	180
GK-OTGFRW	5656692	6274490	195
GK-OTGFRW	5656692	6274490	201
GK-OTGFRW	5656692	6274490	208
GK-OTGFRW	5656692	6274490	213
GK-OTGFRW	5656692	6274490	220
GK-OTGFRW	5656692	6274490	233
GK-OTGFRW	5656692	6274490	239
		/m	
GK-OTGGR	5666486	6278686	170
GK-OTGGR	5666486	6278686	175
GK-OTGGR	5666486	6278686	178
GK-OTGLGR	5666424	6278682	170
GK-OTGLGR	5666424	6278682	175
GK-OTGLGR	5666424	6278682	178
GK-OTGO	6036233	6278690	274
GK-OTGRW	5666400	6278680	170
GK-OTGRW	5666400	6278680	175
GK-OTGRW	5666400	6278680	178
GK-OTGRW	5666400	6278680	193
GK-OTGRW	5666400	6278680	199
GK-OTGRW	5666400	6278680	205
GK-OTGRW	5666400	6278680	211
GK-OTGRW	5666400	6278680	217
GK-OTGRW	5666400	6278680	230
GK-OTGRW	5666400	6278680	236
GK-OTGRW	5666400	6278680	242
GK-OTKCW	5666547	6278781	171
GK-OTKCW	5666547	6278781	175
GK-OTKCW	5666547	6278781	179
GK-OTKKPI	6036271	6278790	274
GK-OTKLGR	5666554	6278782	171
GK-OTKLGR	5666554	6278782	175
GK-OTKLGR	5666554	6278782	179
GK-OTKRW	5666530	6278780	171
GK-OTKRW	5666530	6278780	175
GK-OTKRW	5666530	6278780	179
GK-OTKRW	5666530	6278780	193
GK-OTKRW	5666530	6278780	199
GK-OTKRW	5666530	6278780	211
GK-OTKRW	5666530	6278780	217
GK-OTKRW	5666530	6278780	230
GK-OTKRW	5666530	6278780	236
GK-OTKRW	5666530	6278780	242
		/pc.	
GK-OTSA45AL	6417957	6113034	160
GK-OTSA45AL	6417957	6113034	163
GK-OTSA45AL	6417957	6113034	166
GK-OTSA45LGR	6419166	6113032	146
GK-OTSA45LGR	6419166	6113032	149
GK-OTSA45LGR	6419166	6113032	152
GK-OTSA45RW	6419159	6113030	146
GK-OTSA45RW	6419159	6113030	149
GK-OTSA45RW	6419159	6113030	152
GK-OTSA45RW	6419159	6113030	160
GK-OTSA45RW	6419159	6113030	163
GK-OTSA45RW	6419159	6113030	166
GK-T70110CW	5656586	6274361	172
GK-T70110GR	5656623	6274366	172
GK-T70110LGR	5656616	6274362	172
GK-T70110RW	5656579	6274360	172
GK-T70130CW	5656920	6274561	176
GK-T70130GR	5656944	6274566	176
GK-T70130LGR	5656937	6274562	176
GK-T70130RW	5656913	6274560	176
GK-T70170CW	5657231	6274761	180
GK-T70170GR	5657255	6274766	180
GK-T70170LGR	5657248	6274762	180
GK-T70170RW	5657224	6274760	180
GK-TA WDK 1AL	6418398	6113314	159
GK-TA WDK 1AL	6418398	6113314	165
GK-TA WDK 1LGR	6419869	6113312	145
GK-TA WDK 1LGR	6419869	6113312	151
GK-TA WDK 1RW	6419845	6113310	145
GK-TA WDK 1RW	6419845	6113310	151
GK-TA WDK 1RW	6419845	6113310	159
GK-TA WDK 1RW	6419845	6113310	165
GK-TA WDK 2AL	6418428	6113324	162
GK-TA WDK 2LGR	6419883	6113322	148
GK-TA WDK 2RW	6419876	6113320	148
GK-TA WDK 2RW	6419876	6113320	162
GK-TR53100AL	6418176	6113104	159
GK-TR53100LGR	6419340	6113102	145



Type	GTIN	Art. no.	Page
/pc.			
GK-TR53100RW	6419333	6113100	145
GK-TR53100RW	6419333	6113100	159
GK-TR53130AL	6418411	6113304	162
GK-TR53130LGR	6419821	6113302	148
GK-TR53130RW	6419814	6113300	148
GK-TR53130RW	6419814	6113300	162
GK-TR53165AL	6418664	6113484	165
GK-TR53165LGR	6420162	6113482	151
GK-TR53165RW	6420155	6113480	151
GK-TR53165RW	6420155	6113480	165
/m			
GK-TW53	6419685	6113290	146
GK-TW53	6419685	6113290	149
GK-TW53	6419685	6113290	152
GK-TW53	6419685	6113290	160
GK-TW53	6419685	6113290	163
GK-TW53	6419685	6113290	166
GK-TW70	5658122	6274900	172
GK-TW70	5658122	6274900	177
GK-TW70	5658122	6274900	180
GK-TW70	5658122	6274900	314
/pc.			
G-KWAG70170RW	5657880	6274870	278
G-KWAG70210RW	5657958	6274880	278
G-KWAO70110CW	5657415	6274811	277
G-KWAO70110LGR	5657422	6274812	277
G-KWAO70110RW	5657408	6274810	277
G-KWAO70130CW	5657484	6274821	277
G-KWAO70130RW	5657477	6274820	277
G-KWAO70170CW	5657583	6274831	277
G-KWAO70170LGR	5657590	6274832	277
G-KWAO70170RW	5657545	6274830	277
G-KWAO70210RW	5657644	6274840	278
G-KWAO90110RW	5658139	6274910	277
G-KWAO90130RW	5658207	6274920	277
G-KWAO90170RW	5658306	6274930	278
G-KWAO90210RW	5658375	6274940	278
/m			
GS-A70130RW	5661139	6277400	204
GS-A70170RW	5662945	6277800	216
GS-A70210RW	5663744	6278000	229
GS-A90130RW	5661740	6277500	204
GS-A90170RW	5663317	6277900	216
GS-A90210RW	5664109	6278100	229
/pc.			
GS-AA70130RW	5661269	6277410	206
GS-AA70170RW	5663034	6277810	218
GS-AA70210RW	5663812	6278010	231
GS-AA90130RW	5661900	6277510	206
GS-AA90170RW	5663409	6277910	218
GS-AA90210RW	5664178	6278110	231
GS-AFF70130RW	5661443	6277430	207
GS-AFF70170RW	5663140	6277830	219
GS-AFF70210RW	5663904	6278030	232
GS-AFF90130RW	5662020	6277530	207
GS-AFF90170RW	5663539	6277930	219
GS-AFF90210RW	5664260	6278130	232
GS-AFS70130RW	5661375	6277420	207
GS-AFS70170RW	5663102	6277820	219
GS-AFS70210RW	5663867	6278020	232
GS-AFS90130RW	5661986	6277520	207
GS-AFS90170RW	5663478	6277920	219
GS-AFS90210RW	5664222	6278120	232
GS-AI70130RW	5661559	6277440	208
GS-AI70170RW	5663195	6277840	220
GS-AI70210RW	5663959	6278050	233
GS-AI90130RW	5662075	6277540	208
GS-AI90170RW	5663607	6277940	220
GS-AI90210RW	5664376	6278140	233
GS-AT70130RW	5661665	6277460	208
GS-AT70170RW	5663249	6277860	220
GS-AT70210RW	5664000	6278060	233
GS-AT90130RW	5662129	6277560	208
GS-AT90170RW	5663690	6277960	221
GS-AT90210RW	5664482	6278160	233
/m			
GS-D70170RW	5664666	6278200	223
GS-D70210CW	5665564	6278401	235
GS-D90170RW	5665137	6278300	223
GS-D90210RW	5666097	6278500	235

Type	GTIN	Art. no.	Page
/pc.			
GS-DA70170RW	5664789	6278210	225
GS-DA70210RW	5665625	6278410	237
GS-DA90170RW	5665205	6278310	225
GS-DA90210RW	5666165	6278510	237
GS-DFF70170RW	5664901	6278230	226
GS-DFF70210RW	5665816	6278430	238
GS-DFF90170RW	5665335	6278330	226
GS-DFF90210RW	5666257	6278530	238
GS-DFS70170RW	5664833	6278220	226
GS-DFS70210RW	5665700	6278420	238
GS-DFS90170RW	5665250	6278320	226
GS-DFS90210RW	5666219	6278520	238
GS-DI70170RW	5664987	6278240	227
GS-DI70210RW	5665939	6278440	239
GS-DI90170RW	5665458	6278340	227
GS-DI90210RW	5666301	6278540	239
GS-DT70170RW	5665083	6278260	227
GS-DT70210RW	5666042	6278460	239
GS-DT90170RW	5665502	6278360	227
GS-DT90210RW	5666356	6278560	239
/pc.			
GS-E70110RW	5659228	6277070	196
GS-E70130RW	5660484	6277270	202
GS-E70130RW	5660484	6277270	209
GS-E70170RW	5662464	6277670	214
GS-E70170RW	5662464	6277670	221
GS-E70170RW	5662464	6277670	228
GS-E70210RW	5664055	6278070	234
GS-E70210RW	5664055	6278070	240
GS-E90110RW	5659921	6277170	197
GS-E90130RW	5661023	6277370	203
GS-E90130RW	5661023	6277370	209
GS-E90170RW	5662877	6277770	215
GS-E90170RW	5662877	6277770	221
GS-E90170RW	5662877	6277770	228
GS-E90210RW	5664567	6278170	234
GS-E90210RW	5664567	6278170	240
/VPE			
GS-KUP70	5660590	6277290	192
GS-KUP70	5660590	6277290	198
GS-KUP70	5660590	6277290	204
GS-KUP70	5660590	6277290	210
GS-KUP70	5660590	6277290	216
GS-KUP70	5660590	6277290	223
GS-KUP70	5660590	6277290	229
GS-KUP70	5660590	6277290	235
GS-KUP90	5700852	6277294	192
GS-KUP90	5700852	6277294	198
GS-KUP90	5700852	6277294	204
GS-KUP90	5700852	6277294	210
GS-KUP90	5700852	6277294	216
GS-KUP90	5700852	6277294	223
GS-KUP90	5700852	6277294	229
GS-KUP90	5700852	6277294	235
/pc.			
GS-OT50ARW	5681038	6279890	225
GS-OT50FRW	5681090	6279990	227
/m			
GS-OT50RW	5680925	6279880	224
/pc.			
GS-OTARW	5696056	6279870	194
GS-OTARW	5696056	6279870	200
GS-OTARW	5696056	6279870	206
GS-OTARW	5696056	6279870	212
GS-OTARW	5696056	6279870	218
GS-OTARW	5696056	6279870	225
GS-OTARW	5696056	6279870	231
GS-OTARW	5696056	6279870	237
GS-OTFRW	5695936	6279860	195
GS-OTFRW	5695936	6279860	201
GS-OTFRW	5695936	6279860	207
GS-OTFRW	5695936	6279860	213
GS-OTFRW	5695936	6279860	220
GS-OTFRW	5695936	6279860	226
GS-OTFRW	5695936	6279860	232
GS-OTFRW	5695936	6279860	238
/m			
GS-OTRW	5695813	6279850	193
GS-OTRW	5695813	6279850	199
GS-OTRW	5695813	6279850	205
GS-OTRW	5695813	6279850	211
GS-OTRW	5695813	6279850	217

Type	GTIN	Art. no.	Page
		/m	
GS-OTRW	5695813	6279850	224
GS-OTRW	5695813	6279850	230
GS-OTRW	5695813	6279850	236
GS-OTRW	5695813	6279850	241
GS-S70110RW	5658726	6277000	192
GS-S70130RW	5660002	6277200	198
GS-S70170RW	5662174	6277600	210
GS-S90110RW	5659389	6277100	192
GS-S90130RW	5660606	6277300	198
GS-S90170RW	5662518	6277700	210
		/pc.	
GS-SA70110RW	5658856	6277010	194
GS-SA70130RW	5660163	6277210	200
GS-SA70170RW	5662242	6277610	212
GS-SA90110RW	5659518	6277110	194
GS-SA90130RW	5660767	6277310	200
GS-SA90170RW	5662587	6277710	212
GS-SFS70110RW	5658962	6277020	195
GS-SFS70130RW	5660248	6277220	201
GS-SFS70170RW	5662310	6277620	213
GS-SFS90110RW	5659624	6277120	195
GS-SFS90130RW	5660811	6277320	201
GS-SFS90170RW	5662631	6277720	213
GS-SI70110RW	5659044	6277040	196
GS-SI70130RW	5660323	6277240	202
GS-SI70170RW	5662365	6277640	214
GS-SI90110RW	5659709	6277140	196
GS-SI90130RW	5660866	6277340	202
GS-SI90170RW	5662709	6277740	214
GS-ST70110RW	5659150	6277060	196
GS-ST70130RW	5660408	6277260	202
GS-ST70170RW	5662419	6277660	214
GS-ST90110RW	5659815	6277160	196
GS-ST90130RW	5660941	6277360	202
GS-ST90170RW	5662754	6277760	214
		/m	
GS-TW70	5659334	6277090	197
GS-TW70	5659334	6277090	203
GS-TW70	5659334	6277090	209
GS-TW70	5659334	6277090	215
GS-TW70	5659334	6277090	221
GS-TW70	5659334	6277090	228
GS-TW70	5659334	6277090	234
GS-TW70	5659334	6277090	240
GS-TW90	5659341	6277095	197
GS-TW90	5659341	6277095	203
GS-TW90	5659341	6277095	209
GS-TW90	5659341	6277095	215
GS-TW90	5659341	6277095	221
GS-TW90	5659341	6277095	228
GS-TW90	5659341	6277095	234
GS-TW90	5659341	6277095	240
		/pc.	
G-SVS70110RW	5667667	6279760	194
G-SVS70130RW	5667704	6279764	200
G-SVS70130RW	5667704	6279764	205
G-SVS70170RW	5667742	6279768	212
G-SVS70170RW	5667742	6279768	218
G-SVS70170RW	5667742	6279768	224
G-SVS70210RW	5667780	6279772	230
G-SVS70210RW	5667780	6279772	236
G-SVS90110RW	5667827	6279776	194
G-SVS90130RW	5667865	6279780	200
G-SVS90130RW	5667865	6279780	206
G-SVS90170RW	5667902	6279784	212
G-SVS90170RW	5667902	6279784	218
G-SVS90170RW	5667902	6279784	225
G-SVS90210RW	5667940	6279788	231
G-SVS90210RW	5667940	6279788	237
HAT30	5465249	6290201	317
IKR4RW	5616559	6288365	329
IKR-6 RW	5889373	6119319	327
IKR-6 RW	5889373	6119319	329
IOP3RW	5144885	6287080	243
ISS110100FEL	5477402	6289043	302
ISS110100FRW	5477013	6289040	302

Type	GTIN	Art. no.	Page
		/pc.	
ISS110100REL	5477426	6289063	300
ISS110100RRW	5477037	6289060	300
ISS140100FEL	5477020	6289053	306
ISS140100FRW	5477419	6289050	306
ISS140100REL	5477044	6289073	304
ISS140100RRW	5477433	6289070	304
ISS140110EL	5160908	6288963	294
ISS140110RW	5160861	6288960	294
ISS160160APKTS	6427451	6290456	315
ISS160160AS HRO	6191512	6290423	314
ISS160160AS WA	6191505	6290422	314
ISS160160BP	6191499	6290416	313
ISS160160DB WA	6191529	6290436	313
ISS160160DLA	6258659	6290495	314
ISS160160IP4 EL	6191468	6290404	312
ISS160160IP6 EL	6191451	6290406	313
ISS70110EL	5160748	6288943	292
ISS70110RW	5160731	6288940	292
ISS70110STKRW	5809142	6286540	285
ISS70110STSRW	5809135	6286530	284
ISS98B	5144045	6286800	285
ISS98KF	5144052	6286802	285
ISSBP110100RW	5816966	6290330	300
ISSBP110100WA	5816980	6290331	300
ISSBP140100RW	5816997	6290336	304
ISSBP140100WA	5817000	6290337	304
ISSBP140110RW	5161752	6290130	294
ISSBP140110WA	5161769	6290134	294
ISSBP70110RW	5161578	6290100	292
ISSBP70110WA	5161585	6290104	292
ISSBP70140RW	5161691	6290120	286
ISSBP70140RW	5161691	6290120	288
ISSBP70140RW	5161691	6290120	290
ISSBP70140WA	5161707	6290124	290
ISSBP70140WA	5161707	6290124	286
ISSBP70140WA	5161707	6290124	288
ISSBPDM45RW	5817017	6290347	309
ISSBPDM45WA	5817024	6290348	309
ISSBW70140RW	5161813	6290150	287
ISSBW70140RW	5161813	6290150	289
ISSDHS45EL	5811794	6289982	321
ISSDHSM45RW	5811787	6289980	321
ISSDM45EL	5773870	6289972	308
ISSDM45FEL	5773924	6289976	310
ISSDM45FRW	5773887	6289974	310
ISSDM45RW	5773863	6289970	308
ISSDV	6258666	6290189	316
ISSGU110100	5817031	6290358	301
ISSGU140100	5817048	6290362	305
ISSGU140110	5161943	6290176	294
ISSGU70110	5161882	6290170	292
ISSGU70140	5161936	6290174	287
ISSGU70140	5161936	6290174	289
ISSGU70140	5161936	6290174	290
ISSGUDM45	5817055	6290372	308
ISSHS140250EL	5161264	6290023	319
ISSHS140250RW	5161226	6290020	319
ISSHS140500EL	5161325	6290033	319
ISSHS140500RW	5161288	6290030	319
ISSHS140700EL	5161387	6290043	319
ISSHS140700RW	5161349	6290040	319
ISSHS4 61OT3LGR	5143918	6286702	318
ISSHS4 61OT3RW	5143888	6286700	318
ISSHS4SR40	5144090	6286810	318
ISSHS6EL	5161561	6290073	320
ISSOG70140EL	6258697	6289088	290
ISSOG70140RW	6258703	6289090	290
ISSOGHS70140EL	6258758	6289096	319
ISSOGHS70140RW	6258765	6289098	319
ISSRGU	5428152	6290178	296
ISSRHSM45EL	5428145	6290091	320
ISSRHSM45RW	5428138	6290090	320
ISSRM45EL	5428107	6290087	296
ISSRM45FEL	5459101	6290097	298
ISSRM45FRW	5459095	6290095	298
ISSRM45RW	5428091	6290086	296



Type	GTIN	Art. no.	Page
ISST70140BEL	5161219	6290013	288
ISST70140BRW	5161202	6290010	288
ISST70140EL	5160670	6288933	286
ISST70140RW	5160663	6288930	286
ISSZ70140	5161868	6290160	286
ISSZ70140	5161868	6290160	288
KAL-K11 AL1	6133857	6117422	364
KAL-K11 RW1	6133833	6117420	364
KAL-K11 SWGR1	6133840	6117421	364
KG2CW	5146582	6287701	276
KG2CW	5146674	6287711	276
KG2EL	5146704	6287723	276
KG2EL	5146742	6287733	276
KG2LGR	5146612	6287702	276
KG2LGR	5146681	6287712	276
KG2RW	5146575	6287700	276
KG2RW	5146643	6287710	276
KL80A	5148777	6288640	173
KL80A	5148777	6288640	177
KL80A	5148777	6288640	181
KL80A	5148777	6288640	186
KL80A	5148777	6288640	189
KL80A	5148777	6288640	197
KL80A	5148777	6288640	203
KL80A	5148777	6288640	209
KL80A	5148777	6288640	215
KL80A	5148777	6288640	221
KL80A	5148777	6288640	228
KL80A	5148777	6288640	234
KL80A	5148777	6288640	240
KL80A	5148777	6288640	250
KL80A	5148777	6288640	255
KL80A	5148777	6288640	258
KL80A	5148777	6288640	261
KL80A	5148777	6288640	265
KNW1	6014514	6178527	130
KNW1	6014514	6178527	139
KNW2	6014637	6178529	130
KNW2	6014637	6178529	139
KS70110	5680697	6279802	274
KS70130	5680703	6279804	274
KS70170	5680734	6279806	274
KSN1	6014279	6178520	130
KSN1	6014279	6178520	139
KSN22	6337057	6178525	130
KSN22	6337057	6178525	139
KSP170	5680741	6279810	275
KSP210	5680758	6279812	275
KSR20020	6018598	6249842	78
KSR20030	6018710	6249844	79
KSR30030	5691020	6249845	80
KSR40040	6018833	6249846	82
KSR40060	6018956	6249848	84
KSR60060	6019076	6249850	86
KSR60100	5020325	6249852	88
KSR60150	5020387	6249854	90
KSR60200	5020394	6249856	92
KSR80080	5691037	6249865	94
KUPP	5149071	6288680	241

Type	GTIN	Art. no.	Page
LK4 15015	6000050	6178001	108
LK4 30015	6000173	6178003	108
LK4 30025	6000296	6178005	108
LK4 40025	6000418	6178010	108
LK4 40040	6000531	6178012	109
LK4 40060	6000654	6178014	109
LK4 40080	6000777	6178016	109
LK4 40100	6000890	6178018	110
LK4 60015	6001132	6178026	110
LK4 60025	6001255	6178028	110
LK4 60040	6001378	6178031	111
LK4 60060	6001491	6178033	111
LK4 60080	6001613	6178035	111
LK4 60100	6001736	6178037	112
LK4 60120	6001859	6178039	112
LK4 80025	6002214	6178050	112
LK4 80040	6002337	6178052	113
LK4 80060	6002450	6178054	113
LK4 80080	6002573	6178056	113
LK4 80100	6002696	6178059	114
LK4 80120	6002818	6178061	114
LK4 D 100	6040803	6178490	110
LK4 D 100	6040803	6178490	112
LK4 D 100	6040803	6178490	114
LK4 D 100	6040803	6178490	116
LK4 D 100	6040803	6178490	118
LK4 D 120	6040926	6178492	112
LK4 D 120	6040926	6178492	114
LK4 D 120	6040926	6178492	117
LK4 D 120	6040926	6178492	119
LK4 D 15	6040209	6178480	108
LK4 D 15	6040209	6178480	110
LK4 D 15	6040209	6178480	115
LK4 D 25	6040322	6178482	108
LK4 D 25	6040322	6178482	109
LK4 D 25	6040322	6178482	111
LK4 D 25	6040322	6178482	113
LK4 D 25	6040322	6178482	115
LK4 D 25	6040322	6178482	117
LK4 D 40	6040445	6178484	109
LK4 D 40	6040445	6178484	111
LK4 D 40	6040445	6178484	113
LK4 D 40	6040445	6178484	115
LK4 D 40	6040445	6178484	117
LK4 D 60	6040568	6178486	109
LK4 D 60	6040568	6178486	111
LK4 D 60	6040568	6178486	113
LK4 D 60	6040568	6178486	116
LK4 D 60	6040568	6178486	118
LK4 D 80	6040681	6178488	110
LK4 D 80	6040681	6178488	112
LK4 D 80	6040681	6178488	114
LK4 D 80	6040681	6178488	116
LK4 D 80	6040681	6178488	118
LK4 H	6008339	6178092	130
LK4 N 60015	6004850	6178201	115
LK4 N 60025	6004973	6178203	115
LK4 N 60040	6005093	6178205	115
LK4 N 60060	6005215	6178207	116
LK4 N 60080	6005307	6178209	116
LK4 N 60100	6005406	6178211	116
LK4 N 60120	6005505	6178213	117
LK4 N 80025	6005802	6178225	117
LK4 N 80040	6005932	6178227	117
LK4 N 80060	6006052	6178229	118
LK4 N 80080	6006175	6178231	118
LK4 N 80100	6006298	6178233	118
LK4 N 80120	6006410	6178236	119
LKM A40040FS	6652273	6247563	81
LKM A40040RW	6652334	6249086	81
LKM A40060FS	6312733	6247571	83
LKM A40060RW	6314232	6249094	83
LKM A60060FS	6977062	6248047	85
LKM A60060RW	6503650	6249558	85
LKM A60100FS	6312979	6248063	87
LKM A60100RW	6314898	6249574	87
LKM A60150FS	6313037	6248071	89
LKM A60150RW	6314959	6249582	89
LKM A60200FS	6313099	6248098	91
LKM A60200RW	6315017	6249590	91

Type	GTIN	Art. no.	Page
LKM A80080FS	5699033	6248332	93
LKM A80080RW	5699101	6248432	93
LKM E40040FS	6652631	6247881	82
LKM E40040RW	6652693	6249418	82
LKM E40060FS	6575114	6247903	84
LKM E40060RW	6575350	6249426	84
LKM E60060FS	6503353	6248284	86
LKM E60060RW	6503292	6249795	86
LKM E60100FS	6575596	6248306	88
LKM E60100RW	6575770	6249817	88
LKM E60150FS	6575657	6248314	90
LKM E60150RW	6575831	6249825	90
LKM E60200FS	6575718	6248322	92
LKM E60200RW	6575893	6249833	92
LKM E80080FS	5699064	6248344	94
LKM E80080RW	5699156	6248454	94
LKM F40040FS	6652518	6247490	81
LKM F40040RW	6652570	6248993	81
LKM F40060FS	6312313	6247504	83
LKM F40060RW	6313990	6249000	83
LKM F60060FS	6503476	6247989	85
LKM F60060RW	6503414	6249485	85
LKM F60100FS	6312559	6248004	88
LKM F60100RW	6314713	6249507	88
LKM F60150FS	6312610	6248012	89
LKM F60150RW	6314775	6249515	89
LKM F60200FS	6312672	6248020	91
LKM F60200RW	6314836	6249523	91
LKM F80080FS	5699026	6248328	93
LKM F80080RW	5699095	6248428	93
LKM I40040FS	6652150	6247652	81
LKM I40040RW	6652211	6249167	81
LKM I40060FS	6313150	6247660	83
LKM I40060RW	6314478	6249175	83
LKM I60060FS	6977185	6248128	85
LKM I60060RW	6977123	6249612	85
LKM I60100FS	6313396	6248144	87
LKM I60100RW	6315079	6249639	87
LKM I60150FS	6313457	6248152	89
LKM I60150RW	6315130	6249647	89
LKM I60200FS	6313518	6248160	91
LKM I60200RW	6315192	6249655	91
LKM I80080FS	5699040	6248336	93
LKM I80080RW	5699118	6248436	93
LKM K140	6119295	6249888	96
LKM K80	6119233	6249884	95
LKM KF 60100	5685081	6249881	87
LKM SV20	6652754	6247431	78
LKM SV30	6118991	6247434	79
LKM SV30	6118991	6247434	80
LKM SV40	6315253	6247458	81
LKM SV40	6315253	6247458	83
LKM SV60	6315314	6247466	85
LKM SV60	6315314	6247466	87
LKM SV60	6315314	6247466	89
LKM SV60	6315314	6247466	91
LKM SV80	5699019	6247472	93
LKM T40040FS	6652396	6247725	81
LKM T40040RW	6652457	6249256	81
LKM T40060FS	6317592	6247733	83
LKM T40060RW	6318018	6249264	83
LKM T60060FS	6503599	6248187	85
LKM T60060RW	6503537	6249671	85
LKM T60100FS	6317837	6248209	87
LKM T60100RW	6318254	6249701	87
LKM T60150FS	6317899	6248217	89
LKM T60150RW	6318315	6249728	89
LKM T60200FS	6317950	6248225	91
LKM T60200RW	6318377	6249736	91
LKM T80080FS	5699057	6248340	93
LKM T80080RW	5699125	6248450	93
LKM TWS55	6644896	6249876	95
LKM TWS75	5762898	6249880	95
LKM Z100	6315499	6249922	95
LKM Z150	6315611	6249965	95
LKM Z200	6315673	6249981	95
LKM Z60	6315376	6249906	95
LKM20020FS	6651672	6246966	78

Type	GTIN	Art. no.	Page
LKM20020RW	6651795	6248462	78
LKM20030FS	6118878	6246974	79
LKM20030RW	6119059	6248470	79
LKM30030FS	5690955	6246982	80
LKM30030RW	5690962	6248482	80
LKM40040FS	6651733	6246990	81
LKM40040RW	6651856	6248497	81
LKM40060FS	6311897	6247016	83
LKM40060RW	6313570	6248519	83
LKM60060FS	6977369	6247091	85
LKM60060RW	6977307	6248608	85
LKM60100FS	6312139	6247113	87
LKM60100RW	6313815	6248624	87
LKM60150FS	6312191	6247148	89
LKM60150RW	6313877	6248640	89
LKM60200FS	6312252	6247164	91
LKM60200RW	6313938	6248667	91
LKM80080FS	5691006	6247194	93
LKM80080RW	5691013	6248694	93
LKV 100100	6011162	6178341	125
LKV 10037	6010806	6178334	124
LKV 10050	6010929	6178336	124
LKV 10075	6011049	6178338	125
LKV 25025	6009411	6178302	120
LKV 37025	6009534	6178305	120
LKV 37037	6009657	6178307	120
LKV 50025	6009732	6178310	121
LKV 50037	6009831	6178312	121
LKV 50050	6009930	6178314	121
LKV 50075	6010073	6178316	122
LKV 75025	6010196	6178320	122
LKV 75037	6010318	6178322	122
LKV 75050	6010400	6178324	123
LKV 75075	6010509	6178326	123
LKV 75100	6010608	6178328	123
LKV 75125	6010707	6178330	124
LKV D 100	6041763	6178512	123
LKV D 100	6041763	6178512	125
LKV D 100	6041763	6178512	127
LKV D 100	6041763	6178512	129
LKV D 125	6041886	6178514	124
LKV D 125	6041886	6178514	127
LKV D 25	6041282	6178504	120
LKV D 25	6041282	6178504	120
LKV D 25	6041282	6178504	121
LKV D 25	6041282	6178504	122
LKV D 25	6041282	6178504	126
LKV D 37	6041404	6178506	120
LKV D 37	6041404	6178506	121
LKV D 37	6041404	6178506	122
LKV D 37	6041404	6178506	124
LKV D 37	6041404	6178506	126
LKV D 37	6041404	6178506	128
LKV D 50	6041527	6178508	121
LKV D 50	6041527	6178508	123
LKV D 50	6041527	6178508	124
LKV D 50	6041527	6178508	126
LKV D 50	6041527	6178508	128
LKV D 75	6041640	6178510	122
LKV D 75	6041640	6178510	123
LKV D 75	6041640	6178510	125
LKV D 75	6041640	6178510	127
LKV D 75	6041640	6178510	128
LKV H	6011285	6178349	130
LKV H H	6017829	6178650	139
LKV N 100100	6015184	6178441	129
LKV N 10037	6013913	6178435	128
LKV N 10050	6014033	6178437	128
LKV N 10075	6014156	6178439	128
LKV N 75025	6013197	6178420	126
LKV N 75037	6013319	6178422	126
LKV N 75050	6013432	6178424	126
LKV N 75075	6013555	6178426	127
LKV N 75100	6013678	6178428	127
LKV N 75125	6013791	6178430	127
LKVH 50037	5803744	6178582	136



Type	GTIN	Art. no.	Page
		/m	
LKVH 50050	5803829	6178585	136
LKVH 50075	5803836	6178588	136
LKVH D 100	5981480	6178682	138
LKVH D 125	5981497	6178686	138
LKVH D 37	5981459	6178670	136
LKVH D 37	5981459	6178670	137
LKVH D 50	5981466	6178674	136
LKVH D 50	5981466	6178674	137
LKVH D 75	5981473	6178678	136
LKVH D 75	5981473	6178678	137
LKVH N 75037	5803751	6178552	137
LKVH N 75050	5803768	6178556	137
LKVH N 75075	5803799	6178559	137
LKVH N 75100	5803805	6178563	138
LKVH N 75125	5803812	6178566	138
		/pc.	
MTG-12R F AL1	5899747	6105192	358
MTG-12R F RW1	5899693	6105186	358
MTG-12R F SWGR1	5899730	6105189	358
MTG-12R L AL1	5899570	6105168	357
MTG-12R L RW1	5899501	6105162	357
MTG-12R L SWGR1	5899525	6105165	357
MTG-2BC F AL1	5898900	6105096	359
MTG-2BC F RW1	5900603	6105090	359
MTG-2BC F SWGR1	5900641	6105093	359
MTG-2R F AL1	5900566	6105072	356
MTG-2R F RW1	5900542	6105066	356
MTG-2R F SWGR1	5900559	6105069	356
MTG-2R L AL1	5900481	6105048	356
MTG-2R L RW1	5900467	6105042	356
MTG-2R L SWGR1	5900474	6105045	356
MTG-2UC2.1 AL1	6594665	6105304	340
MTG-2UC2.1 RW1	6594603	6105300	340
MTG-2UC2.1 SWGR1	6594641	6105302	340
MTG-3R F AL1	5899259	6105144	357
MTG-3R F RW1	5899204	6105138	357
MTG-3R F SWGR1	5899228	6105141	357
MTG-3R L AL1	5899099	6105120	356
MTG-3R L RW1	5899037	6105114	356
MTG-3R L SWGR1	5899075	6105117	356
MTG-BC F AL1	5900368	6105024	358
MTG-BC F RW1	5900344	6105018	358
MTG-BC F SWGR1	5900351	6105021	358
MTG-DB O AL1	5898610	6104712	363
MTG-DB O RW1	5898597	6104706	363
MTG-DB O SWGR1	5898603	6104709	363
MTG-DB9 F AL1	5898559	6104688	352
MTG-DB9 F RW1	5898535	6104682	352
MTG-DB9 F SWGR1	5898542	6104685	352
MTG-DB9 S AL1	5898245	6104640	352
MTG-DB9 S RW1	5898177	6104634	352
MTG-DB9 S SWGR1	5898191	6104637	352
MTG-DV O AL1	5898795	6104784	363
MTG-DV O RW1	5898771	6104778	363
MTG-DV O SWGR1	5898788	6104781	363
MTG-DVI F AL1	5898733	6104760	361
MTG-DVI F RW1	5898719	6104754	361
MTG-DVI F SWGR1	5898726	6104757	361
MTG-DVI S AL1	5898672	6104736	361
MTG-DVI S RW1	5898658	6104730	361
MTG-DVI S SWGR1	5898665	6104733	361
MTG-HD F AL1	5899044	6104832	362
MTG-HD F RW1	5899013	6104826	362
MTG-HD F SWGR1	5899020	6104829	362
MTG-HD S AL1	5898924	6104808	361
MTG-HD S RW1	5898894	6104802	361
MTG-HD S SWGR1	5898917	6104805	361
MTG-MK L AL1	5899945	6104952	354
MTG-MK L RW1	5899921	6104946	354
MTG-MK L SWGR1	5899938	6104949	354
MTG-R F AL1	5900283	6105000	355
MTG-R F RW1	5900238	6104994	355
MTG-R F SWGR1	5900245	6104997	355
MTG-R L AL1	5900122	6104976	355
MTG-R L RW1	5900047	6104970	355
MTG-R L SWGR1	5900108	6104973	355
MTG-SON S AL1	6102174	6105274	360
MTG-SON S RW1	6102150	6105270	360
MTG-SON S SWGR1	6102167	6105272	360
MTG-U3A F AL1	5899754	6104928	353
MTG-U3A F RW1	5899648	6104922	353
MTG-U3A F SWGR1	5899709	6104925	353
MTG-U3A S AL1	5899372	6104880	352

Type	GTIN	Art. no.	Page
		/pc.	
MTG-U3A S RW1	5899334	6104874	352
MTG-U3A S SWGR1	5899341	6104877	352
MTG-VGA F AL1	5898443	6104664	354
MTG-VGA F RW1	5898375	6104658	354
MTG-VGA F SWGR1	5898436	6104661	354
MTG-VGA S AL1	5898085	6104616	354
MTG-VGA S RW1	5898023	6104610	354
MTG-VGA S SWGR1	5898061	6104613	354
MTG-X O AL1	5900184	6105240	363
MTG-X O RW1	5900115	6105234	363
MTG-X O SWGR1	5900177	6105237	363
MTG-X3F L AL1	5900009	6105216	359
MTG-X3F L RW1	5899860	6105210	359
MTG-X3F L SWGR1	5899877	6105213	359
MTG-X3F S AL1	6102099	6105254	359
MTG-X3F S RW1	6102051	6105250	359
MTG-X3F S SWGR1	6102068	6105252	359
MTG-X3M L AL1	5900092	6105228	359
MTG-X3M L RW1	5900054	6105222	359
MTG-X3M L SWGR1	5900061	6105225	359
MTG-X3M S AL1	6102129	6105262	360
MTG-X3M S RW1	6102105	6105258	360
MTG-X3M S SWGR1	6102112	6105260	360
MTS-12R F AL1	5899822	6105204	358
MTS-12R F RW1	5899761	6105198	358
MTS-12R F SWGR1	5899815	6105201	358
MTS-12R L AL1	5899686	6105180	358
MTS-12R L RW1	5899617	6105174	358
MTS-12R L SWGR1	5899624	6105177	358
MTS-2BC F AL1	5898986	6105108	359
MTS-2BC F RW1	5898948	6105102	359
MTS-2BC F SWGR1	5898962	6105105	359
MTS-2R F AL1	5900597	6105084	356
MTS-2R F RW1	5900573	6105078	356
MTS-2R F SWGR1	5900580	6105081	356
MTS-2R L AL1	5900535	6105060	356
MTS-2R L RW1	5900511	6105054	356
MTS-2R L SWGR1	5900528	6105057	356
MTS-3R F AL1	5899464	6105156	357
MTS-3R F RW1	5899273	6105150	357
MTS-3R F SWGR1	5899457	6105153	357
MTS-3R L AL1	5899167	6105132	357
MTS-3R L RW1	5899136	6105126	357
MTS-3R L SWGR1	5899143	6105129	357
MTS-BC F AL1	5900429	6105036	358
MTS-BC F RW1	5900405	6105030	358
MTS-BC F SWGR1	5900412	6105033	358
MTS-DB O AL1	5898641	6104724	363
MTS-DB O RW1	5898627	6104718	363
MTS-DB O SWGR1	5898634	6104721	363
MTS-DB9 F AL1	5898580	6104700	352
MTS-DB9 F RW1	5898566	6104694	352
MTS-DB9 F SWGR1	5898573	6104697	352
MTS-DB9 S AL1	5898320	6104652	352
MTS-DB9 S RW1	5898269	6104646	352
MTS-DB9 S SWGR1	5898313	6104649	352
MTS-DV O AL1	5898863	6104796	363
MTS-DV O RW1	5898849	6104790	363
MTS-DV O SWGR1	5898856	6104793	363
MTS-DVI F AL1	5898764	6104772	361
MTS-DVI F RW1	5898740	6104766	361
MTS-DVI F SWGR1	5898757	6104769	361
MTS-DVI S AL1	5898702	6104748	361
MTS-DVI S RW1	5898689	6104742	361
MTS-DVI S SWGR1	5898696	6104745	361
MTS-HD F AL1	5899150	6104844	362
MTS-HD F RW1	5899082	6104838	362
MTS-HD F SWGR1	5899105	6104841	362
MTS-HD S AL1	5898979	6104820	362
MTS-HD S RW1	5898931	6104814	362
MTS-HD S SWGR1	5898955	6104817	362
MTS-MK L AL1	5899990	6104964	355
MTS-MK L RW1	5899976	6104958	355
MTS-MK L SWGR1	5899983	6104961	355
MTS-R F AL1	5900337	6105012	355
MTS-R F RW1	5900290	6105006	355
MTS-R F SWGR1	5900306	6105009	355
MTS-R L AL1	5900221	6104988	355
MTS-R L RW1	5900160	6104982	355
MTS-R L SWGR1	5900214	6104985	355
MTS-U3A F AL1	5899884	6104940	353
MTS-U3A F RW1	5899808	6104934	353
MTS-U3A F SWGR1	5899853	6104937	353

Type	GTIN	Art. no.	Page
		/pc.	
MTS-U3A S AL1	5899402	6104892	353
MTS-U3A S RW1	5899389	6104886	353
MTS-U3A S SWGR1	5899396	6104889	353
MTS-VGA F AL1	5898504	6104676	354
MTS-VGA F RW1	5898481	6104670	354
MTS-VGA F SWGR1	5898498	6104673	354
MTS-VGA S AL1	5898146	6104628	354
MTS-VGA S RW1	5898122	6104622	354
MTS-VGA S SWGR1	5898139	6104625	354
MVKG70130	5680765	6279820	275
MVKG70170	5680796	6279822	275
MVKG70210	5680802	6279824	275
MVKG90130	5680819	6279826	276
MVKG90170	5680826	6279828	276
MVKG90210	5680857	6279830	276
NS8 ST	6191550	6290499	314
OK-K 45	6176236	6116116	154
OT A Soft EL	5914259	6115855	267
OT A Style EL	5914273	6115865	267
OT A Swing EL	5914235	6115851	267
OT GAD Soft EL	5914174	6115835	266
OT GAD Style EL	5914198	6115845	266
OT GAD Swing EL	5914150	6115825	266
OT I Soft EL	5914334	6115885	268
OT I Style EL	5914358	6115895	268
OT I Swing EL	5914310	6115875	267
		/100 pc.	
OTK H110	5817901	6176128	74
OTK H150	5817918	6176131	74
OTK H60	5817864	6176122	74
OTK H90	5817895	6176125	74
		/pc.	
PAD-ID6 AL1	6049189	6120005	364
PAD-ID6 RW1	6049127	6120003	364
PAD-ID6 SWGR1	6049134	6120001	364
PV N3 100H	5147176	6288104	275
PV N3 125H	5147183	6288106	275
PV N3 150H	5147213	6288108	275
PV N3 175H	5147220	6288110	275
PV N3 200H	5147237	6288112	275
PV N3 225H	5147244	6288114	275
PV N3 250H	5147275	6288116	275
PV N3 275H	5147282	6288118	275
PV N3 300H	5147299	6288120	275
PV N3 50H	5147152	6288100	275
PV N3 75H	5147169	6288102	275
PVV N2 100	5146865	6288030	276
PVV N2 125	5146872	6288032	276
PVV N2 150	5146889	6288034	276
PVV N2 475	5146971	6288044	276
PVV N2 500	5297253	6288084	276
PVV N2 600	5147008	6288050	276
PVV N2 625	5147039	6288052	276
PVV N2 700	5147060	6288058	276
PVV N2 800	5297284	6288090	276
PVV N2 875	5147121	6288066	276
RK-E1117GR	6543137	6156223	62
RK-E1117LGR	6543076	6156231	62
RK-K1117	6543199	6156207	62
RKV3V	5149088	6288700	193
RKV3V	5149088	6288700	199
RKV3V	5149088	6288700	205
RKV3V	5149088	6288700	211
RKV3V	5149088	6288700	217
RKV3V	5149088	6288700	224
RKV3V	5149088	6288700	230
RKV3V	5149088	6288700	236
RKV3V	5149088	6288700	242
RKV3V	5149088	6288700	249
RKV3V	5149088	6288700	254
RKV3V	5149088	6288700	257

Type	GTIN	Art. no.	Page
		/pc.	
RKV3V	5149088	6288700	260
RKV3V	5149088	6288700	264
RKV3V	5149088	6288700	312
RKV3V	5149088	6288700	317
RKV3V	5149088	6288700	323
RS-BS AL1	6570959	6120954	342
RS-BS RW1	6570935	6120950	342
RS-BS SWGR1	6570942	6120952	342
RT-BS AL1	6571079	6120984	343
RT-BS RW1	6571055	6120980	343
RT-BS SWGR1	6571062	6120982	343
SAISSF	5459279	6290198	298
SAISSF	5459279	6290198	302
SAISSF	5459279	6290198	306
SAISSF	5459279	6290198	310
SDE-RW D0GN1	5889120	6119402	326
SDE-RW D0GN1B	5889250	6119422	327
SDE-RW D0GN2	5889175	6119408	326
SDE-RW D0GN2B	5889304	6119428	326
SDE-RW D0GN3	5889205	6119415	326
SDE-RW D0GN3B	5889359	6119434	327
SDE-RW D0RT1	5889137	6119403	326
SDE-RW D0RT1B	5889267	6119423	327
SDE-RW D0RT2	5889182	6119409	326
SDE-RW D0RT2B	5889311	6119429	326
SDE-RW D0RT3	5889236	6119413	326
SDE-RW D0RT3B	5889366	6119435	327
SDE-RW D0RW1	5889113	6119401	326
SDE-RW D0RW1B	5889243	6119421	327
SDE-RW D0RW2	5889144	6119407	326
SDE-RW D0RW2B	5889298	6119427	326
SDE-RW D0RW3	5889199	6119414	326
SDE-RW D0RW3B	5889328	6119433	327
SFISSFRW	5459231	6290196	298
SFISSFRW	5459231	6290196	302
SFISSFRW	5459231	6290196	306
SFISSFRW	5459231	6290196	310
SFISSFWAL	5459248	6290197	298
SFISSFWAL	5459248	6290197	302
SFISSFWAL	5459248	6290197	306
SFISSFWAL	5459248	6290197	310
SG2545	6628278	6028411	19
SK2545	6628216	6028403	19
SKL-45 DBU	6158959	6199467	101
SKL-45 DBU	6158959	6199467	103
SKL-45 DRW	6158775	6199461	101
SKL-45 DRW	6158775	6199461	103
		/m	
SKL-50DBU	6096442	6199109	100
SKL-50DRW	6096329	6199103	100
SKL-70DBU	6154272	6199208	102
SKL-70DRW	6154098	6199202	102
		/pc.	
SKL-A50DBU	6153312	6199139	100
SKL-A50DRW	6119615	6199133	100
SKL-A70DBU	6155774	6199238	102
SKL-A70DRW	6154579	6199232	102
SKL-DS DBU	6157570	6199427	101
SKL-DS DBU	6157570	6199427	103
SKL-DS DRW	6157037	6199421	101
SKL-DS DRW	6157037	6199421	103
SKL-EL50DBU	6153558	6199156	100
SKL-EL50DRW	6153497	6199150	100
SKL-EL70DBU	6156016	6199257	102
SKL-EL70DRW	6155835	6199251	102
SKL-ER50DBU	6153794	6199169	100
SKL-ER50DRW	6153619	6199163	100
SKL-ER70DBU	6156375	6199268	102
SKL-ER70DRW	6156078	6199262	102
SKL-I50DBU	6100057	6199128	100
SKL-I50DRW	6096503	6199122	100
SKL-I70DBU	6154517	6199229	102
SKL-I70DRW	6154333	6199223	102
SKL-R DRW	6156795	6199402	101
SKL-R DRW	6156795	6199402	103
SKL-SA50DBU	6154036	6199186	100



Type	GTIN	Art. no.	Page
SKL-SA50DRW	6153855	6199180	100
SKL-SA70DBU	6156672	6199287	102
SKL-SA70DRW	6156559	6199281	102
SKL-Z DBU	6158713	6199448	101
SKL-Z DBU	6158713	6199448	103
SKL-Z DRW	6157938	6199442	101
SKL-Z DRW	6157938	6199442	103
SKS-CHO RW1	5008866	6117200	337
SKS-DK0 RW1	5462231	6117202	337
SKS-DKE0 RW1	5616016	6117203	337
SP3	5680680	6279800	275
STA-SKS S1 SW	5438090	6117192	376
STA-SKS S1 W	5483571	6117193	376
STA-SKS SU1 SW	5670933	6117196	376
STA-SKS SU1 W	5670940	6117197	376
STD-BS0 RW1	6049851	6120722	337
STD-BSOG RW1.5	6049868	6120724	337
STD-CNOA10 RW1	6050086	6120740	339
STD-CNOA16 RW1	6050109	6120742	339
STD-CNOM RW1.5	6050147	6120744	339
STD-D0 AL1	6047093	6120018	368
STD-D0 AL2	6047222	6120032	368
STD-D0 AL3	6047390	6120052	368
STD-D0 MZGN1	6047024	6120012	368
STD-D0 MZGN2	6047147	6120026	368
STD-D0 MZGN3	6047321	6120046	368
STD-D0 ROR1	6046973	6120010	368
STD-D0 ROR2	6047130	6120024	368
STD-D0 ROR3	6047277	6120044	368
STD-D0 RW1	6046966	6120008	368
STD-D0 RW2	6047109	6120022	368
STD-D0 RW3	6047260	6120042	368
STD-D0 SRO1	6047031	6120014	368
STD-D0 SRO2	6047154	6120028	368
STD-D0 SRO3	6047345	6120048	368
STD-D0 SWGR1	6047086	6120016	368
STD-D0 SWGR2	6047208	6120030	368
STD-D0 SWGR3	6047383	6120050	368
STD-D0C AL1	6049608	6120352	382
STD-D0C AL2	6049738	6120372	382
STD-D0C AL3	6050031	6120392	382
STD-D0C MZGN1	6049486	6120346	382
STD-D0C MZGN2	6049660	6120366	382
STD-D0C MZGN3	6049790	6120386	382
STD-D0C ROR1	6049431	6120344	382
STD-D0C ROR2	6049622	6120364	382
STD-D0C ROR3	6049783	6120384	382
STD-D0C RW1	6049387	6120340	382
STD-D0C RW2	6049615	6120362	382
STD-D0C RW3	6049745	6120382	382
STD-D0C SRO1	6049509	6120348	382
STD-D0C SRO2	6049677	6120368	382
STD-D0C SRO3	6049974	6120388	382
STD-D0C SWGR1	6049554	6120350	382
STD-D0C SWGR2	6049721	6120370	382
STD-D0C SWGR3	6050024	6120390	382
STD-D0C8 AL1	6050277	6120422	382
STD-D0C8 AL2	6050390	6120442	383
STD-D0C8 AL3	6050512	6120462	383
STD-D0C8 MZGN1	6050222	6120416	382
STD-D0C8 MZGN2	6050345	6120436	383
STD-D0C8 MZGN3	6050468	6120456	383
STD-D0C8 ROR1	6050208	6120414	382
STD-D0C8 ROR2	6050321	6120434	383
STD-D0C8 ROR3	6050444	6120454	383
STD-D0C8 RW1	6050154	6120412	382
STD-D0C8 RW2	6050314	6120432	383
STD-D0C8 RW3	6050437	6120452	383
STD-D0C8 SRO1	6050253	6120418	382
STD-D0C8 SRO2	6050376	6120438	383
STD-D0C8 SRO3	6050499	6120458	383
STD-D0C8 SWGR1	6050260	6120420	382
STD-D0C8 SWGR2	6050383	6120440	383
STD-D0C8 SWGR3	6050505	6120460	383
STD-D0K SRO1	6049073	6120292	368
STD-D0K SRO2	6049141	6120294	368
STD-D0K SRO3	6049196	6120296	369
STD-D3 AL1	6047567	6120082	370
STD-D3 AL2	6047703	6120112	370
STD-D3 AL3	6047994	6120132	370

Type	GTIN	Art. no.	Page
STD-D3 MZGN1	6047505	6120076	370
STD-D3 MZGN2	6047628	6120106	370
STD-D3 MZGN3	6047925	6120126	370
STD-D3 ROR1	6047468	6120074	370
STD-D3 ROR2	6047581	6120104	370
STD-D3 ROR3	6047871	6120124	370
STD-D3 RW1	6047444	6120072	370
STD-D3 RW2	6047574	6120102	370
STD-D3 RW3	6047864	6120122	370
STD-D3 SRO1	6047512	6120078	370
STD-D3 SRO2	6047635	6120108	370
STD-D3 SRO3	6047949	6120128	370
STD-D3 SWGR1	6047529	6120080	370
STD-D3 SWGR2	6047680	6120110	370
STD-D3 SWGR3	6047987	6120130	370
STD-D3C AL2	6050635	6120492	383
STD-D3C AL3	6050758	6120512	383
STD-D3C MZGN2	6050581	6120486	383
STD-D3C MZGN3	6050703	6120506	383
STD-D3C ROR2	6050567	6120484	383
STD-D3C ROR3	6050680	6120504	383
STD-D3C RW2	6050550	6120482	383
STD-D3C RW3	6050673	6120502	383
STD-D3C SRO2	6050611	6120488	383
STD-D3C SRO3	6050734	6120508	383
STD-D3C SWGR2	6050628	6120490	383
STD-D3C SWGR3	6050741	6120510	383
STD-D3K SRO1	6049240	6120302	370
STD-D3K SRO2	6049257	6120304	370
STD-D3K SRO3	6049264	6120306	371
STD-F0 AL1	6048175	6120162	372
STD-F0 AL2	6048298	6120182	372
STD-F0 AL3	6048403	6120201	372
STD-F0 MZGN1	6048069	6120155	372
STD-F0 MZGN2	6048236	6120176	372
STD-F0 MZGN3	6048359	6120196	372
STD-F0 ROR1	6048052	6120154	372
STD-F0 ROR2	6048229	6120174	372
STD-F0 ROR3	6048342	6120194	372
STD-F0 RW1	6048045	6120152	372
STD-F0 RW2	6048182	6120172	372
STD-F0 RW3	6048304	6120192	372
STD-F0 SRO1	6048113	6120158	372
STD-F0 SRO2	6048243	6120178	372
STD-F0 SRO3	6048366	6120198	372
STD-F0 SWGR1	6048168	6120160	372
STD-F0 SWGR2	6048281	6120180	372
STD-F0 SWGR3	6048397	6120200	372
STD-F0C AL1	6050864	6120542	384
STD-F0C AL2	6050987	6120562	384
STD-F0C AL3	6051090	6120582	384
STD-F0C MZGN1	6050819	6120536	384
STD-F0C MZGN2	6050925	6120556	384
STD-F0C MZGN3	6051045	6120576	384
STD-F0C ROR1	6050802	6120534	384
STD-F0C ROR2	6050918	6120554	384
STD-F0C ROR3	6051038	6120574	384
STD-F0C RW1	6050796	6120532	384
STD-F0C RW2	6050871	6120552	384
STD-F0C RW3	6050994	6120572	384
STD-F0C SRO1	6050826	6120538	384
STD-F0C SRO2	6050949	6120558	384
STD-F0C SRO3	6051052	6120578	384
STD-F0C SWGR1	6050857	6120540	384
STD-F0C SWGR2	6050970	6120560	384
STD-F0C SWGR3	6051069	6120580	384
STD-F0C8 AL1	6051427	6120612	384
STD-F0C8 AL2	6051540	6120632	385
STD-F0C8 AL3	6051663	6120652	385
STD-F0C8 MZGN1	6051359	6120606	384
STD-F0C8 MZGN2	6051472	6120626	385
STD-F0C8 MZGN3	6051595	6120646	385
STD-F0C8 ROR1	6051342	6120604	384
STD-F0C8 ROR2	6051465	6120624	385
STD-F0C8 ROR3	6051588	6120644	385
STD-F0C8 RW1	6051335	6120602	384
STD-F0C8 RW2	6051458	6120622	385
STD-F0C8 RW3	6051571	6120642	385
STD-F0C8 SRO1	6051397	6120608	384
STD-F0C8 SRO2	6051519	6120628	385
STD-F0C8 SRO3	6051632	6120648	385
STD-F0C8 SWGR1	6051403	6120610	384
STD-F0C8 SWGR2	6051526	6120630	385
STD-F0C8 SWGR3	6051649	6120650	385

Type	GTIN	Art. no.	Page
STD-F0K SRO1	6049301	6120312	372
STD-F0K SRO2	6049318	6120314	372
STD-F0K SRO3	6049363	6120316	373
STD-F3 AL1	6048762	6120232	374
STD-F3 AL2	6048946	6120252	374
STD-F3 AL3	6049066	6120272	374
STD-F3 MZGN1	6048700	6120226	374
STD-F3 MZGN2	6048847	6120246	374
STD-F3 MZGN3	6049004	6120266	374
STD-F3 ROR1	6048649	6120224	374
STD-F3 ROR2	6048823	6120244	374
STD-F3 ROR3	6048991	6120264	374
STD-F3 RW1	6048540	6120222	374
STD-F3 RW2	6048786	6120242	374
STD-F3 RW3	6048953	6120262	374
STD-F3 SRO1	6048717	6120228	374
STD-F3 SRO2	6048885	6120248	374
STD-F3 SRO3	6049011	6120268	374
STD-F3 SWGR1	6048724	6120230	374
STD-F3 SWGR2	6048892	6120250	374
STD-F3 SWGR3	6049028	6120270	374
STD-F3C AL2	6048526	6120682	385
STD-F3C AL3	6048663	6120702	385
STD-F3C MZGN2	6048465	6120676	385
STD-F3C MZGN3	6048595	6120696	385
STD-F3C ROR2	6048427	6120674	385
STD-F3C ROR3	6048588	6120694	385
STD-F3C RW2	6048410	6120672	385
STD-F3C RW3	6048533	6120692	385
STD-F3C SRO2	6048472	6120678	385
STD-F3C SRO3	6048601	6120698	385
STD-F3C SWGR2	6048489	6120680	385
STD-F3C SWGR3	6048656	6120700	385
STD-F3K SRO1	6049424	6120322	374
STD-F3K SRO2	6049493	6120324	374
STD-F3K SRO3	6049547	6120326	375
STD-IN0 RW1	6049899	6120726	338
STD-IN0M RW1	6049905	6120728	338
STD-IT0 RW0.5	6467822	6120746	337
STD-MS0 RW1	6050079	6120738	339
STD-SA0 RW1	6049912	6120730	338
STD-SA0G RW1.5	6049981	6120734	338
STD-SA0GK SRO1.5	6050017	6120736	338
STD-SA0K SRO1	6049967	6120732	338
ST-F GST18i3p SW	5273530	6108050	377
ST-F GST18i3p W	5273547	6108051	377
ST-S GST18i3p SW	5273608	6108054	377
ST-S GST18i3p W	5273646	6108055	377
ST-S GST18i5p SW	5273707	6108070	378
ST-S4 GST18i3 SW	6584680	6108060	377
ST-S4 GST18i3 W	6584697	6108062	377
TAE-6F AL1	6215959	6117430	364
TA-WB AL0.5	6571017	6120964	342
TA-WB AL1	6571048	6120970	343
TA-WB RW0.5	6570966	6120960	342
TA-WB RW1	6571024	6120966	343
TA-WB SWGR0.5	6571000	6120962	342
TA-WB SWGR1	6571031	6120968	343
TWP	5147510	6288264	244
ULS	6015061	6178548	131
ÜSM-A	5080886	5092451	341
ÜSM-A-150	5475804	5092466	341
ÜSM-A-4T	5699767	6107801	341
ÜSS 45-A-RW	6117611	6117465	341
ÜSS 45-O-RW	6117673	6117473	341
VB-2 GST18i3p	6584673	6108086	378
VB-3 GST18i3p	5273721	6108080	378
VB-5 GST18i3p	5273769	6108082	378
VB-G GST18i3p	5896975	6108045	376

Type	GTIN	Art. no.	Page
VB-SKS S	5438113	6117198	376
VB-T GST18i3p	5273776	6108084	378
VK ISCS 5012	6149100	6178643	132
VL-3Q1.5 1 SW	5122326	6108100	380
VL-3Q1.5 1 W	5122692	6108125	380
VL-3Q1.5 10 SW	5122500	6108109	380
VL-3Q1.5 10 W	5122876	6108134	380
VL-3Q1.5 2 SW	5122333	6108101	380
VL-3Q1.5 2 W	5122708	6108126	380
VL-3Q1.5 3 SW	5122340	6108102	380
VL-3Q1.5 3 W	5122746	6108127	380
VL-3Q1.5 4 SW	5122388	6108103	380
VL-3Q1.5 4 W	5122753	6108128	380
VL-3Q1.5 5 SW	5122395	6108104	380
VL-3Q1.5 5 W	5122760	6108129	380
VL-3Q1.5 6 SW	5122401	6108105	380
VL-3Q1.5 6 W	5122807	6108130	380
VL-3Q1.5 7 SW	5122449	6108106	380
VL-3Q1.5 7 W	5122814	6108131	380
VL-3Q1.5 8 SW	5122456	6108107	380
VL-3Q1.5 8 W	5122821	6108132	380
VL-3Q1.5 9 SW	5122463	6108108	380
VL-3Q1.5 9 W	5122869	6108133	380
VL-3Q2.5 1 SW	5123064	6108150	380
VL-3Q2.5 1 W	5123422	6108175	380
VL-3Q2.5 10 SW	5123248	6108159	380
VL-3Q2.5 10 W	5123552	6108184	380
VL-3Q2.5 2 SW	5123101	6108151	380
VL-3Q2.5 2 W	5123453	6108176	380
VL-3Q2.5 3 SW	5123118	6108152	380
VL-3Q2.5 3 W	5123460	6108177	380
VL-3Q2.5 4 SW	5123125	6108153	380
VL-3Q2.5 4 W	5123477	6108178	380
VL-3Q2.5 5 SW	5123163	6108154	380
VL-3Q2.5 5 W	5123484	6108179	380
VL-3Q2.5 6 SW	5123170	6108155	380
VL-3Q2.5 6 W	5123514	6108180	380
VL-3Q2.5 7 SW	5123187	6108156	380
VL-3Q2.5 7 W	5123521	6108181	380
VL-3Q2.5 8 SW	5123224	6108157	380
VL-3Q2.5 8 W	5123538	6108182	380
VL-3Q2.5 9 SW	5123231	6108158	380
VL-3Q2.5 9 W	5123545	6108183	380
VL-3Q2.5 H1 SW	5124368	6108450	381
VL-3Q2.5 H1 W	5124733	6108475	381
VL-3Q2.5 H10 SW	5124542	6108459	381
VL-3Q2.5 H10 W	5124894	6108484	381
VL-3Q2.5 H2 SW	5124375	6108451	381
VL-3Q2.5 H2 W	5124740	6108476	381
VL-3Q2.5 H3 SW	5124382	6108452	381
VL-3Q2.5 H3 W	5124788	6108477	381
VL-3Q2.5 H4 SW	5124429	6108453	381
VL-3Q2.5 H4 W	5124795	6108478	381
VL-3Q2.5 H5 SW	5124436	6108454	381
VL-3Q2.5 H5 W	5124801	6108479	381
VL-3Q2.5 H6 SW	5124443	6108455	381
VL-3Q2.5 H6 W	5124832	6108480	381
VL-3Q2.5 H7 SW	5124481	6108456	381
VL-3Q2.5 H7 W	5124849	6108481	381
VL-3Q2.5 H8 SW	5124498	6108457	381
VL-3Q2.5 H8 W	5124856	6108482	381
VL-3Q2.5 H9 SW	5124504	6108458	381
VL-3Q2.5 H9 W	5124863	6108483	381
VR-GST18	6584741	6108074	379
WAG140100RRW	5648963	6290290	300
WAG140100RRW	5648963	6290290	304
WAG140110RW	5162162	6290240	295
WAG70140O	5418566	6290260	291
WAG70140TRW	5162063	6290200	287
WAG70140TRW	5162063	6290200	289
WAGDM45	5817079	6290387	308
WAGRM45	5428169	6290264	296
WDK HA100130CW	6107650	6161154	56
WDK HA100130GR	6027798	6024580	56
WDK HA100130LGR	6676996	6182747	56



Type	GTIN	Art. no.	Page
WDK HA100130RW	5042600	6192424	56
WDK HA10020CW	6099979	6153291	20
WDK HA10020RW	6492015	6154417	20
WDK HA100230CW	6501854	6161170	57
WDK HA100230GR	6501915	6024688	57
WDK HA100230LGR	6501793	6182763	57
WDK HA100230RW	5042693	6192428	57
WDK HA10030CW	6804498	6153305	22
WDK HA10030RW	6491537	6154425	22
WDK HA15030CW	6579198	6160611	25
WDK HA15030GR	6579136	6158358	25
WDK HA15030RW	6795253	6192149	25
WDK HA15040CW	6579372	6160638	27
WDK HA15040GR	6579310	6158366	27
WDK HA15040RW	6494712	6192157	27
WDK HA20020CW	6579013	6160603	29
WDK HA20020GR	6578955	6158331	29
WDK HA20020LGR	6675197	6182402	29
WDK HA20020RW	6795314	6192165	29
WDK HA20050CW	6507856	6153372	31
WDK HA20050RW	6493210	6154468	31
WDK HA25025CW	6579556	6160646	33
WDK HA25025GR	6579495	6158374	33
WDK HA25025LGR	6675258	6182445	33
WDK HA25025RW	6504855	6192173	33
WDK HA25040CW	6579730	6160654	34
WDK HA25040GR	6579679	6158382	34
WDK HA25040RW	6795376	6192181	34
WDK HA30030CW	6580095	6160670	36
WDK HA30030GR	6580033	6158404	36
WDK HA30030LGR	6675319	6182488	36
WDK HA30030RW	6795437	6192211	36
WDK HA30045CW	6641598	6160689	37
WDK HA30045GR	6641536	6158420	37
WDK HA30045LGR	6675371	6182496	37
WDK HA30045RW	6497171	6192238	37
WDK HA40040CW	6580279	6160697	38
WDK HA40040GR	6580217	6158412	38
WDK HA40040LGR	6675432	6182526	38
WDK HA40040RW	6795499	6192246	38
WDK HA40060CW	6106813	6160700	39
WDK HA40060GR	6019212	6021697	39
WDK HA40060LGR	6675494	6182534	39
WDK HA40060RW	6795550	6192254	39
WDK HA40090CW	6106875	6160719	40
WDK HA40090GR	6017171	6021093	40
WDK HA40090LGR	6675555	6182542	40
WDK HA40090RW	6795611	6192262	40
WDK HA40110CW	6106936	6160727	42
WDK HA40110GR	6019274	6021700	42
WDK HA40110LGR	6675616	6182550	42
WDK HA40110RW	6220878	6192270	42
WDK HA60060CW	6107179	6160905	44
WDK HA60060GR	6020539	6022073	44
WDK HA60060LGR	6676392	6182593	44
WDK HA60060RW	6360970	6192319	44
WDK HA60090CW	6107230	6160913	45
WDK HA60090GR	6020713	6022111	45
WDK HA60090LGR	6676453	6182607	45
WDK HA60090RW	6801558	6192327	45
WDK HA60110CW	6107292	6160921	48
WDK HA60110GR	6020836	6022146	48
WDK HA60110LGR	6676514	6182615	48
WDK HA60110RW	6354559	6192335	48
WDK HA60130CW	6107353	6160948	50
WDK HA60130GR	6020959	6022162	50
WDK HA60130LGR	6676576	6182623	50
WDK HA60130RW	6353057	6192343	50
WDK HA60150CW	6638352	6160972	51
WDK HA60150GR	6638291	6024521	51
WDK HA60150LGR	6676637	6182631	51
WDK HA60150RW	6492312	6192351	51
WDK HA60170CW	6107414	6160956	52
WDK HA60170GR	6021079	6022189	52
WDK HA60170LGR	6676699	6182658	52
WDK HA60170RW	6351855	6192378	52
WDK HA60210CW	6107476	6160964	53
WDK HA60210GR	6021130	6022197	53
WDK HA60210LGR	6676750	6182666	53
WDK HA60210RW	6795673	6192386	53
WDK HA60230CW	6639731	6160980	47
WDK HA60230GR	6639670	6024548	47
WDK HA60230LGR	6676811	6182674	47
WDK HA60230RW	6492374	6192394	47

Type	GTIN	Art. no.	Page
WDK HA80170CW	6107537	6161103	54
WDK HA80170GR	6027675	6024564	54
WDK HA80170LGR	6676873	6182712	54
WDK HA80170RW	5042464	6192416	54
WDK HA80210CW	6107599	6161111	55
WDK HA80210GR	6027736	6024572	55
WDK HA80210LGR	6676934	6182720	55
WDK HA80210RW	5042532	6192420	55
WDK HE100130CW	6110353	6163041	56
WDK HE100130GR	6028337	6024882	56
WDK HE100130LGR	6678976	6183956	56
WDK HE100130RW	5042655	6193395	56
WDK HE10020CW	6100392	6153593	21
WDK HE10020RW	6491834	6154514	21
WDK HE100230CW	6651436	6163076	57
WDK HE100230GR	6651375	6024904	57
WDK HE100230LGR	6679034	6183980	57
WDK HE100230RW	5042723	6193399	57
WDK HE10030CW	6100453	6153607	23
WDK HE10030RW	6491353	6154522	23
WDK HE15015CW	6642670	6162495	24
WDK HE15015GR	6642618	6158692	24
WDK HE15015LGR	6673933	6183603	24
WDK HE15015RW	6797172	6193099	24
WDK HE15030CW	6583577	6162517	26
WDK HE15030GR	6434534	6158714	26
WDK HE15030RW	6797233	6193102	26
WDK HE15040CW	6583690	6162525	28
WDK HE15040GR	6434596	6158722	28
WDK HE15040RW	6975624	6193110	28
WDK HE20020CW	6583454	6162509	29
WDK HE20020GR	6434473	6158706	29
WDK HE20020LGR	6673995	6183611	29
WDK HE20020RW	6797295	6193129	29
WDK HE20035CW	6643219	6162487	30
WDK HE20035GR	6643158	6158781	30
WDK HE20035LGR	6674053	6183654	30
WDK HE20035RW	6976768	6193137	30
WDK HE20050CW	6507672	6153674	32
WDK HE20050RW	6493395	6154557	32
WDK HE25025CW	6583812	6162533	33
WDK HE25025GR	6434657	6158730	33
WDK HE25025LGR	6674114	6183662	33
WDK HE25025RW	6504794	6193145	33
WDK HE25040CW	6583935	6162541	35
WDK HE25040GR	6434718	6158749	35
WDK HE25040RW	6797356	6193153	35
WDK HE30030CW	6584239	6162576	36
WDK HE30030GR	6584178	6158765	36
WDK HE30030LGR	6674176	6183697	36
WDK HE30030RW	6797417	6193188	36
WDK HE30045CW	6641239	6162584	37
WDK HE30045GR	6434831	6158803	37
WDK HE30045LGR	6674237	6183700	37
WDK HE30045RW	6497355	6193196	37
WDK HE40040CW	6583331	6162592	38
WDK HE40040GR	6583270	6158773	38
WDK HE40040LGR	6674299	6183727	38
WDK HE40040RW	6712939	6193218	38
WDK HE40060CW	6109517	6162606	39
WDK HE40060GR	6018857	6021492	39
WDK HE40060LGR	6674350	6183735	39
WDK HE40060RW	6797479	6193226	39
WDK HE40090CW	6109579	6162614	41
WDK HE40090GR	6018918	6021506	41
WDK HE40090LGR	6674411	6183743	41
WDK HE40090RW	6797530	6193234	41
WDK HE40110CW	6109630	6162622	43
WDK HE40110GR	6018970	6021514	43
WDK HE40110LGR	6674473	6183751	43
WDK HE40110RW	6974788	6193242	43
WDK HE60060CW	6109876	6162800	44
WDK HE60060GR	6022694	6022499	44
WDK HE60060LGR	6678372	6183808	44
WDK HE60060RW	6712991	6193285	44
WDK HE60090CW	6109937	6162819	46
WDK HE60090GR	6022755	6022502	46
WDK HE60090LGR	6678433	6183816	46
WDK HE60090RW	6492794	6193293	46
WDK HE60110CW	6109999	6162827	49
WDK HE60110GR	6022991	6022588	49
WDK HE60110LGR	6678495	6183824	49
WDK HE60110RW	6713059	6193307	49
WDK HE60130CW	6110056	6162835	50

Type	GTIN	Art. no.	Page
WDK HE60130GR	6022816	6022529 /pc.	50
WDK HE60130LGR	6678556	6183832	50
WDK HE60130RW	6713110	6193315	50
WDK HE60150CW	6637997	6162878	51
WDK HE60150GR	6637935	6024823	51
WDK HE60150LGR	6678617	6183840	51
WDK HE60150RW	6492855	6193323	51
WDK HE60170CW	6110117	6162843	52
WDK HE60170GR	6022878	6022545	52
WDK HE60170LGR	6678679	6183859	52
WDK HE60170RW	6713172	6193331	52
WDK HE60210CW	6110179	6162851	53
WDK HE60210GR	6022939	6022561	53
WDK HE60210LGR	6678730	6183867	53
WDK HE60210RW	6797592	6193358	53
WDK HE60230CW	6639373	6162886	47
WDK HE60230GR	6639311	6024831	47
WDK HE60230LGR	6678792	6183875	47
WDK HE60230RW	6492916	6193366	47
WDK HE80170CW	6110230	6163009	54
WDK HE80170GR	6028214	6024858	54
WDK HE80170LGR	6678853	6183913	54
WDK HE80170RW	5042518	6193387	54
WDK HE80210CW	6110292	6163017	55
WDK HE80210GR	6028276	6024874	55
WDK HE80210LGR	6678914	6183921	55
WDK HE80210RW	5042587	6193391	55
WDK HF100130CW	6108558	6161758	56
WDK HF100130GR	6027972	6024637	56
WDK HF100130LGR	6678310	6183557	56
WDK HF100130RW	5042648	6193029	56
WDK HF10020CW	6099139	6152600	20
WDK HF10020RW	6491896	6154212	20
WDK HF100230CW	6501250	6161774	57
WDK HF100230GR	6501311	6024653	57
WDK HF100230LGR	6222131	6183573	57
WDK HF100230RW	5042716	6193033	57
WDK HF10030CW	6099191	6152619	22
WDK HF10030RW	6491414	6154220	22
WDK HF15030CW	6582075	6161219	25
WDK HF15030GR	6582013	6158595	25
WDK HF15030RW	6796694	6192750	25
WDK HF15040CW	6582259	6161227	27
WDK HF15040GR	6582198	6158609	27
WDK HF15040RW	6494835	6192769	27
WDK HF20020CW	6581894	6161200	29
WDK HF20020GR	6581832	6158587	29
WDK HF20020LGR	6673391	6183212	29
WDK HF20020RW	6796755	6192777	29
WDK HF20050CW	6507733	6152686	31
WDK HF20050RW	6493333	6154255	31
WDK HF25025CW	6582433	6161235	33
WDK HF25025GR	6582372	6158617	33
WDK HF25025LGR	6673452	6183255	33
WDK HF25025RW	6504916	6192785	33
WDK HF25040CW	6582617	6161243	34
WDK HF25040GR	6582556	6158625	34
WDK HF25040RW	6796816	6192793	34
WDK HF30030CW	6582976	6161278	36
WDK HF30030GR	6582914	6158641	36
WDK HF30030LGR	6673513	6183298	36
WDK HF30030RW	6796878	6192815	36
WDK HF30045CW	6641772	6161286	37
WDK HF30045GR	6641710	6158676	37
WDK HF30045LGR	6673575	6183301	37
WDK HF30045RW	6497294	6192823	37
WDK HF40040CW	6583157	6161294	38
WDK HF40040GR	6583096	6158668	38
WDK HF40040LGR	6673636	6183336	38
WDK HF40040RW	6796939	6192831	38
WDK HF40060CW	6107711	6161308	39
WDK HF40060GR	6019458	6021735	39
WDK HF40060LGR	6673698	6183344	39
WDK HF40060RW	6796991	6192858	39
WDK HF40090CW	6107773	6161316	40
WDK HF40090GR	6018253	6021336	40
WDK HF40090LGR	6673759	6183352	40
WDK HF40090RW	6797059	6192866	40
WDK HF40110CW	6107834	6161324	42
WDK HF40110GR	6019519	6021743	42
WDK HF40110LGR	6673810	6183360	42
WDK HF40110RW	6496990	6192874	42
WDK HF60060CW	6108077	6161502	44
WDK HF60060GR	6022519	6022448	44

Type	GTIN	Art. no.	Page
WDK HF60060LGR	6677719	6183409 /pc.	44
WDK HF60060RW	6712694	6192912	44
WDK HF60090CW	6108138	6161510	45
WDK HF60090GR	6021796	6022316	45
WDK HF60090LGR	6677771	6183417	45
WDK HF60090RW	6492619	6192920	45
WDK HF60110CW	6108190	6161529	48
WDK HF60110GR	6021918	6022332	48
WDK HF60110LGR	6677832	6183425	48
WDK HF60110RW	6712755	6192939	48
WDK HF60130CW	6108251	6161537	50
WDK HF60130GR	6022038	6022359	50
WDK HF60130LGR	6677894	6183433	50
WDK HF60130RW	6712816	6192947	50
WDK HF60150CW	6638536	6161561	51
WDK HF60150GR	6638475	6024599	51
WDK HF60150LGR	6677955	6183441	51
WDK HF60150RW	6492671	6192955	51
WDK HF60170CW	6108312	6161545	52
WDK HF60170GR	6022151	6022375	52
WDK HF60170LGR	6678013	6183468	52
WDK HF60170RW	6712878	6192963	52
WDK HF60210CW	6108374	6161553	53
WDK HF60210GR	6022274	6022391	53
WDK HF60210LGR	6678075	6183476	53
WDK HF60210RW	6797110	6192971	53
WDK HF60230CW	6639915	6161596	47
WDK HF60230GR	6639854	6024602	47
WDK HF60230LGR	6678136	6183484	47
WDK HF60230RW	6492732	6192998	47
WDK HF80170CW	6108435	6161707	54
WDK HF80170GR	6027859	6024610	54
WDK HF80170LGR	6678198	6183522	54
WDK HF80170RW	5042488	6193021	54
WDK HF80210CW	6108497	6161715	55
WDK HF80210GR	6027910	6024629	55
WDK HF80210LGR	6678259	6183530	55
WDK HF80210RW	5042570	6193025	55
WDK HI100130CW	6106752	6160522	56
WDK HI100130GR	6027613	6024483	56
WDK HI100130LGR	6676330	6182348	56
WDK HI100130RW	5042594	6192114	56
WDK HI10020CW	6099559	6153003	20
WDK HI10020RW	6492077	6154328	20
WDK HI100230CW	6502035	6160549	57
WDK HI100230GR	6502097	6024505	57
WDK HI100230LGR	6501977	6182364	57
WDK HI100230RW	5042662	6192118	57
WDK HI10030CW	6099610	6153011	22
WDK HI10030RW	6491599	6154336	22
WDK HI15030CW	6577811	6160026	25
WDK HI15030GR	6577750	6158234	25
WDK HI15030RW	6794652	6191843	25
WDK HI15040CW	6577996	6160034	27
WDK HI15040GR	6577934	6158242	27
WDK HI15040RW	6494651	6191851	27
WDK HI20020CW	6577637	6160018	29
WDK HI20020GR	6577576	6158226	29
WDK HI20020LGR	6674657	6182011	29
WDK HI20020RW	6794713	6191878	29
WDK HI20050CW	6507917	6153089	31
WDK HI20050RW	6974542	6154360	31
WDK HI25025CW	6578177	6160042	33
WDK HI25025GR	6578115	6158250	33
WDK HI25025LGR	6674718	6182062	33
WDK HI25025RW	6502219	6191886	33
WDK HI25040CW	6578351	6160050	34
WDK HI25040GR	6578290	6158269	34
WDK HI25040RW	6794775	6191894	34
WDK HI30030CW	6578719	6160077	36
WDK HI30030GR	6578658	6158285	36
WDK HI30030LGR	6674770	6182097	36
WDK HI30030RW	6794836	6191924	36
WDK HI30045CW	6641413	6160085	37
WDK HI30045GR	6641352	6158307	37
WDK HI30045LGR	6674831	6182100	37
WDK HI30045RW	6976829	6191932	37
WDK HI40040CW	6584598	6160093	38
WDK HI40040GR	6578832	6158293	38
WDK HI40040LGR	6674893	6182119	38
WDK HI40040RW	6794898	6191940	38
WDK HI40060CW	6105915	6160107	39
WDK HI40060GR	6019335	6021719	39
WDK HI40060LGR	6674954	6182127	39



Type	GTIN	Art. no.	Page
WDK HI40060RW	6794959	6191959	39
WDK HI40090CW	6105977	6160115	40
WDK HI40090GR	6017652	6021190	40
WDK HI40090LGR	6675012	6182135	40
WDK HI40090RW	6795017	6191967	40
WDK HI40110CW	6106035	6160123	42
WDK HI40110GR	6019397	6021727	42
WDK HI40110LGR	6675074	6182143	42
WDK HI40110RW	6221110	6191975	42
WDK HI60060CW	6106271	6160301	44
WDK HI60060GR	6022212	6022383	44
WDK HI60060LGR	6675739	6182194	44
WDK HI60060RW	6362950	6192017	44
WDK HI60090CW	6106332	6160328	45
WDK HI60090GR	6021253	6022219	45
WDK HI60090LGR	6675791	6182208	45
WDK HI60090RW	6799879	6192025	45
WDK HI60110CW	6106394	6160336	48
WDK HI60110GR	6021376	6022235	48
WDK HI60110LGR	6675852	6182216	48
WDK HI60110RW	6362776	6192033	48
WDK HI60130CW	6106455	6160344	50
WDK HI60130GR	6021499	6022251	50
WDK HI60130LGR	6675913	6182224	50
WDK HI60130RW	6362479	6192041	50
WDK HI60150CW	6638178	6160379	51
WDK HI60150GR	6638116	6024432	51
WDK HI60150LGR	6675975	6182232	51
WDK HI60150RW	6800056	6192068	51
WDK HI60170CW	6106516	6160352	52
WDK HI60170GR	6021611	6022286	52
WDK HI60170LGR	6676033	6182240	52
WDK HI60170RW	6362233	6192076	52
WDK HI60210CW	6106578	6160360	53
WDK HI60210GR	6021673	6022294	53
WDK HI60210LGR	6676095	6182259	53
WDK HI60210RW	6795079	6192084	53
WDK HI60230CW	6639557	6160395	47
WDK HI60230GR	6639496	6024440	47
WDK HI60230LGR	6676156	6182267	47
WDK HI60230RW	6800896	6192092	47
WDK HI80170CW	6106639	6160484	54
WDK HI80170GR	6027491	6024467	54
WDK HI80170LGR	6676217	6182305	54
WDK HI80170RW	5042457	6192106	54
WDK HI80210CW	6106691	6160492	55
WDK HI80210GR	6027552	6024475	55
WDK HI80210LGR	6676279	6182313	55
WDK HI80210RW	5042525	6192110	55
WDK HK100130CW	6109456	6162452	56
WDK HK100130GR	6028153	6024815	56
WDK HK100130LGR	6677658	6183166	56
WDK HK100130RW	5042631	6192726	56
WDK HK100230CW	6501618	6162479	57
WDK HK100230GR	6501670	6024718	57
WDK HK100230LGR	6501373	6183182	57
WDK HK100230RW	5042709	6192730	57
WDK HK40060CW	6108619	6162002	39
WDK HK40060GR	6025459	6023312	39
WDK HK40060LGR	6673155	6182925	39
WDK HK40060RW	6796519	6192556	39
WDK HK40090CW	6108671	6162010	40
WDK HK40090GR	6024551	6023142	40
WDK HK40090LGR	6673216	6182933	40
WDK HK40090RW	6796571	6192564	40
WDK HK40110CW	6108732	6162029	42
WDK HK40110GR	6025572	6023339	42
WDK HK40110LGR	6673278	6182941	42
WDK HK40110RW	6500833	6192572	42
WDK HK60060CW	6108978	6162207	44
WDK HK60060GR	6025039	6023223	44
WDK HK60060LGR	6677054	6183018	44
WDK HK60060RW	6351794	6192610	44
WDK HK60090CW	6109036	6162215	45
WDK HK60090GR	6023837	6023002	45
WDK HK60090LGR	6677115	6183026	45
WDK HK60090RW	6492435	6192629	45
WDK HK60110CW	6109098	6162223	48
WDK HK60110GR	6023950	6023029	48
WDK HK60110LGR	6677177	6183034	48
WDK HK60110RW	6712519	6192637	48
WDK HK60130CW	6109159	6162231	50
WDK HK60130GR	6024070	6023045	50
WDK HK60130LGR	6677238	6183042	50

Type	GTIN	Art. no.	Page
WDK HK60130RW	6712571	6192645	50
WDK HK60150CW	6638710	6162274	51
WDK HK60150GR	6638659	6024769	51
WDK HK60150LGR	6677290	6183050	51
WDK HK60150RW	6492497	6192653	51
WDK HK60170CW	6109210	6162258	52
WDK HK60170GR	6024193	6023061	52
WDK HK60170LGR	6677351	6183069	52
WDK HK60170RW	6712632	6192661	52
WDK HK60210CW	6109272	6162266	53
WDK HK60210GR	6024438	6023126	53
WDK HK60210LGR	6677412	6183077	53
WDK HK60210RW	6796632	6192688	53
WDK HK60230CW	6640096	6162290	47
WDK HK60230GR	6640034	6024777	47
WDK HK60230LGR	6677474	6183085	47
WDK HK60230RW	6492558	6192696	47
WDK HK80170CW	6109333	6162401	54
WDK HK80170GR	6028030	6024793	54
WDK HK80170LGR	6677535	6183123	54
WDK HK80170RW	5042471	6192718	54
WDK HK80210CW	6109395	6162428	55
WDK HK80210GR	6028092	6024807	55
WDK HK80210LGR	6677597	6183131	55
WDK HK80210RW	5042549	6192722	55
WDK HS10020CW	6098293	6152007	20
WDK HS10020RW	6492138	6154026	20
WDK HS10030CW	6098354	6152015	22
WDK HS10030RW	6491650	6154034	22
WDK HS15030CW	6507610	6152031	25
WDK HS15030GR	6507559	6158838	25
WDK HS15030RW	6223695	6193501	25
WDK HS15040CW	6098477	6152058	27
WDK HS15040GR	6507498	6158846	27
WDK HS15040RW	6975266	6193528	27
WDK HS20050CW	6507252	6152104	31
WDK HS20050RW	6974481	6154069	31
WDK HS25040CW	6507375	6152082	34
WDK HS25040GR	6507436	6158889	34
WDK HS25040RW	6507313	6193560	34
WDK HS40090CW	5462170	6193582	40
WDK HS40090RW	5461814	6193580	40
WDK HS40110CW	5462187	6193588	42
WDK HS40110RW	5461821	6193586	42
WDK HS60090CW	5462217	6193592	45
WDK HS60090RW	5461838	6193590	45
WDK HS60110CW	5462224	6193598	48
WDK HS60110RW	5461845	6193596	48
WDK HT10020CW	6098712	6152309	20
WDK HT10020RW	6491957	6154115	20
WDK HT10030CW	6098774	6152317	22
WDK HT10030RW	6491476	6154123	22
WDK HT15030CW	6580637	6161928	25
WDK HT15030GR	6580576	6158463	25
WDK HT15030RW	6796212	6192459	25
WDK HT15040CW	6580811	6161936	27
WDK HT15040GR	6580750	6158471	27
WDK HT15040RW	6494774	6192467	27
WDK HT20020CW	6580453	6161901	29
WDK HT20020GR	6580392	6158455	29
WDK HT20020LGR	6672851	6182801	29
WDK HT20020RW	6796274	6192475	29
WDK HT20050CW	6507795	6152384	32
WDK HT20050RW	6493272	6154166	32
WDK HT25025CW	6580996	6161944	33
WDK HT25025GR	6580934	6158498	33
WDK HT25025LGR	6672912	6182852	33
WDK HT25025RW	6504978	6192483	33
WDK HT25040CW	6581177	6161952	35
WDK HT25040GR	6581115	6158501	35
WDK HT25040RW	6796335	6192491	35
WDK HT30030CW	6581535	6161979	36
WDK HT30030GR	6581474	6158536	36
WDK HT30030LGR	6672974	6182887	36
WDK HT30030RW	6796397	6192513	36
WDK HT30045CW	6641956	6161987	37
WDK HT30045GR	6641895	6158552	37
WDK HT30045LGR	6673032	6182895	37
WDK HT30045RW	6497232	6192521	37
WDK HT40040CW	6581719	6161995	38
WDK HT40040GR	6581658	6158544	38
WDK HT40040LGR	6673094	6182917	38
WDK HT40040RW	6796458	6192548	38

Type	GTIN	Art. no.	Page
WDK100130CW	6030132	6026273	56
WDK100130GR	6030194	6026281	56
WDK100130LGR	6668595	6027245	56
WDK100130RW	5042297	6191347	56
WDK10020CW	6098170	6150756	20
WDK10020RW	6492251	6150764	20
WDK100230CW	6642137	6026338	57
WDK100230GR	6642076	6026311	57
WDK100230LGR	6668656	6027253	57
WDK100230RW	5042303	6191355	57
WDK10030CW	6508037	6150772	22
WDK10030RW	6491773	6150780	22
WDK15015CW	6642311	6024963	24
WDK15015GR	6642250	6024955	24
WDK15015LGR	6667338	6024947	24
WDK15015RW	6794058	6191002	24
WDK15030CW	6332830	6025013	25
WDK15030GR	6332779	6025005	25
WDK15030RW	6794119	6191010	25
WDK15040CW	6028634	6025167	27
WDK15040GR	6028511	6025137	27
WDK15040RW	6494590	6191029	27
WDK20020CW	6028573	6025153	29
WDK20020GR	6028399	6025110	29
WDK20020LGR	6667390	6025102	29
WDK20020RW	6794171	6191037	29
WDK20035CW	6642854	6026370	30
WDK20035GR	6642793	6026362	30
WDK20035LGR	6667451	6026354	30
WDK20035RW	6496938	6191045	30
WDK20050CW	6438433	6168701	31
WDK20050RW	6801671	6168736	31
WDK25025CW	6030316	6026427	33
WDK25025GR	6030255	6026419	33
WDK25025LGR	6667512	6026400	33
WDK25025RW	6505036	6191053	33
WDK25040CW	6030491	6026451	34
WDK25040GR	6030439	6026443	34
WDK25040RW	6794232	6191061	34
WDK30030CW	6333011	6026826	36
WDK30030GR	6332953	6026818	36
WDK30030LGR	6667574	6026796	36
WDK30030RW	6794294	6191096	36
WDK30045CW	6640935	6026869	37
WDK30045GR	6640874	6026850	37
WDK30045LGR	6667635	6026842	37
WDK30045RW	6497058	6191118	37
WDK40040CW	6028870	6025412	38
WDK40040GR	6028993	6025447	38
WDK40040LGR	6667697	6027016	38
WDK40040RW	6363490	6191126	38
WDK40060CW	6016273	6020887	39
WDK40060GR	6029112	6025633	39
WDK40060LGR	6667758	6027024	39
WDK40060RW	6794355	6191134	39
WDK40090CW	6016334	6020895	40
WDK40090GR	6016877	6021018	40
WDK40090LGR	6667819	6027032	40
WDK40090RW	6794416	6191142	40
WDK40110CW	6016396	6020909	42
WDK40110GR	6016990	6021034	42
WDK40110LGR	6667871	6027040	42
WDK40110RW	6501199	6191150	42
WDK60060CW	6020171	6021948	44
WDK60060GR	6029174	6025668	44
WDK60060LGR	6667994	6027105	44
WDK60060RW	6363018	6191193	44
WDK60090CW	6020119	6021913	45
WDK60090GR	6020232	6022006	45
WDK60090LGR	6668052	6027113	45
WDK60090RW	6491292	6191207	45
WDK60110CW	6019816	6021840	48
WDK60110GR	6020294	6022014	48
WDK60110LGR	6668113	6027121	48
WDK60110RW	6363438	6191215	48
WDK60130CW	6019878	6021859	50
WDK60130GR	6020355	6022022	50
WDK60130LGR	6668175	6027148	50
WDK60130RW	6363377	6191223	50
WDK60150CW	6637577	6021883	51

Type	GTIN	Art. no.	Page
WDK60150GR	6637515	6022030	51
WDK60150LGR	6668236	6027156	51
WDK60150RW	6491230	6191231	51
WDK60170CW	6019939	6021867	52
WDK60170GR	6020416	6022049	52
WDK60170LGR	6668298	6027164	52
WDK60170RW	6363193	6191258	52
WDK60210CW	6019991	6021875	53
WDK60210GR	6020478	6022065	53
WDK60210LGR	6668359	6027172	53
WDK60210RW	6794478	6191266	53
WDK60230CW	6638956	6021891	47
WDK60230GR	6638895	6022057	47
WDK60230LGR	6668410	6027180	47
WDK60230RW	6799459	6191274	47
WDK80170CW	6029778	6026176	54
WDK80170GR	6029839	6026184	54
WDK80170LGR	6668472	6027229	54
WDK80170RW	5042273	6191304	54
WDK80210CW	6029952	6026206	55
WDK80210GR	6029891	6026192	55
WDK80210LGR	6668533	6027237	55
WDK80210RW	5042280	6191312	55
WDKH-10020RW	5933779	6175375	66
WDKH-15030RW	5933953	6175390	67
WDKH-20020LGR	5817789	6175460	68
WDKH-20020RW	5812456	6175400	68
WDKH-30045LGR	5817796	6175463	69
WDKH-30045RW	5812463	6175405	69
WDKH-40060LGR	5817802	6175466	70
WDKH-40060RW	5812470	6175410	70
WDKH-60090LGR	5817833	6175469	71
WDKH-60090RW	5812487	6175415	71
WDKH-60110LGR	5817840	6175472	72
WDKH-60110RW	5812494	6175420	72
WDKH-60150LGR	5817857	6175475	73
WDKH-60150RW	5812500	6175425	73
WDKH-A10020RW	5933830	6175612	66
WDKH-A15030RW	5934127	6175618	67
WDKH-A20020LGR	5922865	6176000	68
WDKH-A20020RW	5922841	6175624	68
WDKH-A30045LGR	5814955	6176004	69
WDKH-A30045RW	5814061	6175626	69
WDKH-A40060LGR	5814962	6176008	70
WDKH-A40060RW	5814078	6175630	70
WDKH-A60090LGR	5814979	6176012	71
WDKH-A60090RW	5814085	6175634	71
WDKH-A60110LGR	5814986	6176016	72
WDKH-A60110RW	5814092	6175638	72
WDKH-A60150LGR	5815020	6176020	73
WDKH-A60150RW	5814108	6175642	73
WDKH-E10020RW	5933946	6175540	66
WDKH-E15030RW	5934233	6175546	67
WDKH-E20020LGR	5814597	6175928	68
WDKH-E20020RW	5813910	6175550	68
WDKH-E30045LGR	5814603	6175932	69
WDKH-E30045RW	5813927	6175554	69
WDKH-E40060LGR	5814610	6175936	70
WDKH-E40060RW	5813934	6175558	70
WDKH-E60090LGR	5814627	6175940	71
WDKH-E60090RW	5813941	6175562	71
WDKH-E60110LGR	5814863	6175944	72
WDKH-E60110RW	5813958	6175566	72
WDKH-E60150LGR	5814870	6175948	73
WDKH-E60150RW	5813965	6175570	73
WDKH-F10020RW	5933885	6175648	66
WDKH-F15030RW	5934158	6175654	67
WDKH-F20020LGR	5922919	6176036	68
WDKH-F20020RW	5922896	6175658	68
WDKH-F30045LGR	5815037	6176040	69
WDKH-F30045RW	5814115	6175662	69
WDKH-F40060LGR	5815044	6176044	70
WDKH-F40060RW	5814122	6175666	70
WDKH-F60090LGR	5815075	6176048	71
WDKH-F60090RW	5814139	6175670	71
WDKH-F60110LGR	5815082	6176052	72
WDKH-F60110RW	5814146	6175674	72
WDKH-F60150LGR	5815099	6176056	73
WDKH-F60150RW	5814153	6175678	73
WDKH-I10020RW	5933809	6175572	66
WDKH-I15030RW	5934073	6175578	67



Type	GTIN	Art. no.	Page
WDKH-I20020LGR	5922803	6175964 /pc.	68
WDKH-I20020RW	5922780	6175581	68
WDKH-I30045LGR	5814887	6175968	69
WDKH-I30045RW	5814016	6175590	69
WDKH-I40060LGR	5814894	6175972	70
WDKH-I40060RW	5814023	6175594	70
WDKH-I60090LGR	5814900	6175976	71
WDKH-I60090RW	5814030	6175598	71
WDKH-I60110LGR	5814917	6175980	72
WDKH-I60110RW	5814047	6175602	72
WDKH-I60150LGR	5814924	6175984	73
WDKH-I60150RW	5814054	6175606	73
WDKH-T10020RW	5933915	6175684	66
WDKH-T15030RW	5934189	6175690	67
WDKH-T20020LGR	5922971	6176072	68
WDKH-T20020RW	5922926	6175694	68
WDKH-T30045LGR	5815105	6176076	69
WDKH-T30045RW	5814160	6175698	69
WDKH-T40060LGR	5815112	6176080	70
WDKH-T40060RW	5814177	6175702	70
WDKH-T60090LGR	5815129	6176084	71
WDKH-T60090RW	5814184	6175706	71
WDKH-T60110LGR	5815136	6176088	72
WDKH-T60110RW	5814191	6175710	72
WDKH-T60150LGR	5815143	6176092	73
WDKH-T60150RW	5814207	6175714	73
WDKH-TW40LGR	5812517	6175500 /m	74
WDKH-TW60LGR	5812524	6175504	74
WDKM11	6798193	6150101	18
WDKM7	6798070	6150071	18
WDKM9	6798131	6150098	18
WDKMD12CW	6097692	6150179	18
WDKMD12RW	6493036	6150284	18
WDKMD17CW	6097753	6150187	19
WDKMD17RW	6492978	6150292	19
WDKMD4CW	6097579	6150152	18
WDKMD4RW	6493159	6150268	18
WDKMD7CW	6097630	6150160	18
WDKMD7RW	6493098	6150276	18
WDK-N20050CW	6438495	6168728	31
WDK-N20050RW	6802159	6168744	31
WDK-N25040CW	6507191	6150632	34
WDK-N25040RW	6975686	6150640	34
WS-UB AL0.5	6570829	6120924 /pc.	342
WS-UB AL1	6570881	6120936	342
WS-UB RW0.5	6570805	6120920	342
WS-UB RW1	6570867	6120932	342
WS-UB SWGR0.5	6570812	6120922	342
WS-UB SWGR1	6570874	6120934	342
WS-UKL AL0.5	6570850	6120930	342
WS-UKL AL1	6570928	6120942	342
WS-UKL RW0.5	6570836	6120926	342
WS-UKL RW1	6570898	6120938	342
WS-UKL SWGR0.5	6570843	6120928	342
WS-UKL SWGR1	6570911	6120940	342
ZL-STD 0	6333578	6120782	369
ZL-STD 0	6333578	6120782	373





OBO Bettermann Holding GmbH & Co. KG
P.O. Box 1120
58694 Menden
GERMANY

Customer Service
Tel.: +49 23 73 89 - 17 00
Fax: +49 23 73 89 - 12 38
export@obo.de

www.obo-bettermann.com

Building Connections

