

Technical data sheet

PYROLINE® Con D BSK I90/E30 fire protection duct



Item number: 7215166



Fire protection duct made from water and frost-proof fibreglass lightweight concrete of building material class A1 according to EN 13501-1 for fireproof laying of cables in rescue and emergency routes, and for the maintenance of electrical functionality of safety-relevant systems. Classification I90 as I duct according to DIN 4102 Part 11 and classification E30 as E duct according to DIN 4102 Part 12.

Mounting of the duct directly on walls or under ceilings.

Including countersunk head screws and sealing strip.
Including countersunk head screws and sealing strip.




Fibreglass lightweight concrete

Master data

Item number	7215166
Type	BSK 091026
Description 1	Fire protection duct I90/E30
Manufacturer	OBO
Dimension	105x260
Colour	Grey
Material	Fibreglass lightweight concrete
Smallest sales unit	1
Unit of quantity	Metre
Weight	1830 kg
Weight unit	kg/100 m

Dimensions

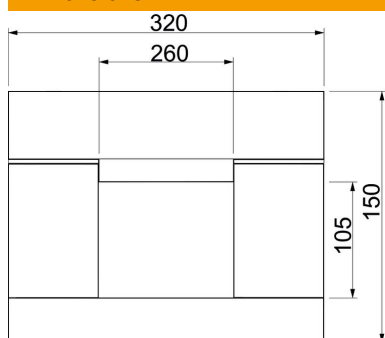

Length	1,000 mm
Dimension B	320 mm
Dimension b	260 mm
Dimension h	105 mm
Dimension H	150 mm

Technical data sheet

PYROLINE® Con D BSK I90/E30 fire protection duct

Item number: 7215166



Technical data

Number of flammable sides	3
Cover fastening	Screw
Fire resistance class E – function maintenance	30
Fire resistance class I – installation duct	90
With perforation	no
Partitions possible	yes
Jacketing	Without
Material of the insulation	Glass-fibre lightweight concrete